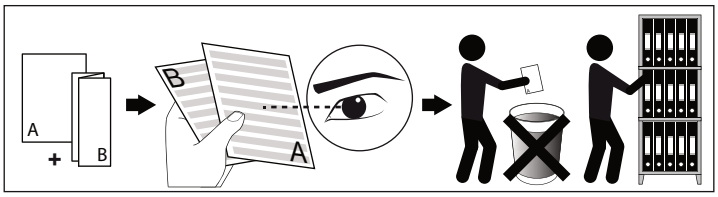

SLM26H - PROFILE

DEEL
PARTIE
TEIL
PART
PARTE
PARTE

A

IP20

Enkel geschikt voor toestellen op zeer lage spanning (minder dan 50 V-AC / 120 V-DC)
Convient uniquement pour les produits à très basse tension (moins de 50 V-AC / 120 V-DC)
Geeignet für Güter mit sehr niedriger Spannung (unter 50 V-AC / 120 V-DC)
Only suited for goods at very low voltage (below 50 V-AC / 120 V-DC)
Se recomieda únicamente para aquellos productos de tensión muy baja (menos de 50 V-AC / 120 V-DC)
Vale unicamente per i prodotti a tensione molto bassa (inferiore a 50 V-AC / 120 V-DC)

Not compatible with Class I devices and not with other companies Class III devices

IP20

Beschermd tegen vaste voorwerpen die groter zijn dan 12 mm
Protégé contre les objets solides de plus de 12 mm
Geschützt gegen Festkörper größer als 12 mm
Protected against solid objects greater than 12 mm
Protegido contra objetos sólidos superiores a 12 mm
Protetto contro oggetti solidi più grandi di 12 mm

Install suitable means for overlad and short-circuit protection according to local installation requirements. (IEC 60364-7-715)

SLM26 H - PROFILE

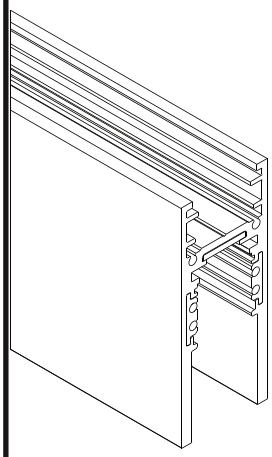

SLM26H - PROFILE
23359 0000
SLM26H - PROFILE 1m
23359 0010
SLM26H - PROFILE 2m
23359 0020
SLM26H - PROFILE 3m
23359 0030



48V-DC (2 conductors)

MAX. 200W, MAX 50M

2 DIM conductors (for individual dimming)
DALI dimmable luminaires on request

TRACK CUTTING TOOL



TRACK CUTTING TOOL
200 12 01

USE AFTER EVERY SAW CUT OF THE ALUMINIUM PROFILE

SLM26H - PROFILE 1m
SLM26H - PROFILE 2m
SLM26H - PROFILE 3m

1

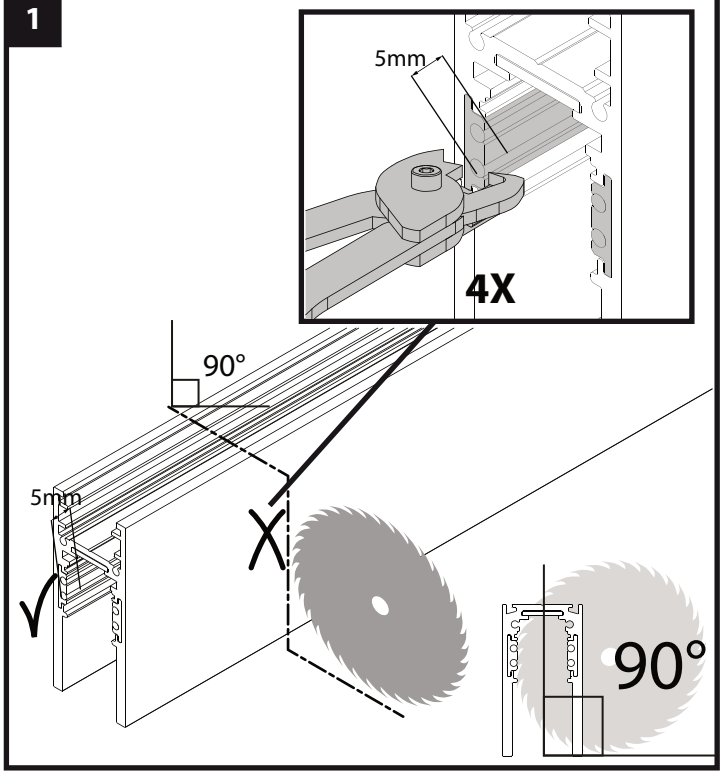

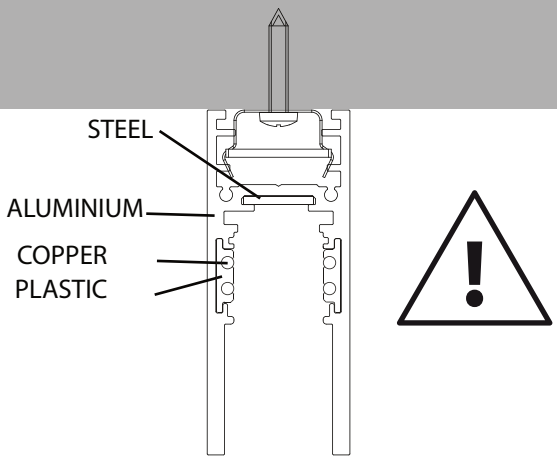

SLM26H - Corner 180°



SLM26H - Corner 180°
23359 0620

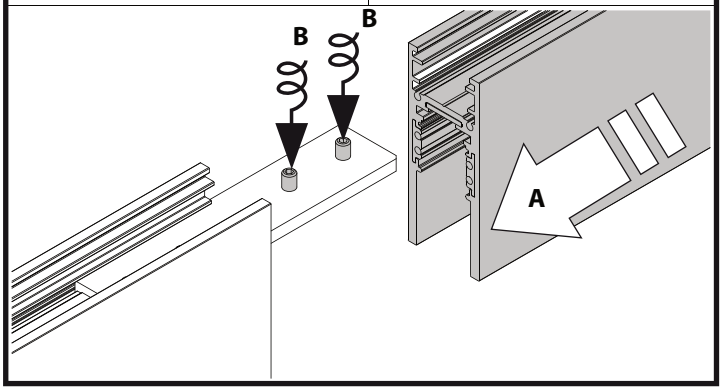

SLM26H - CORNER 90°



SLM26H - Corner set 90°
23359 9640



1

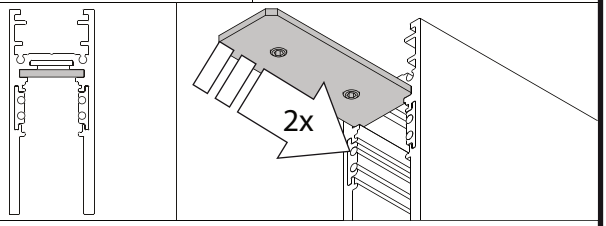

2

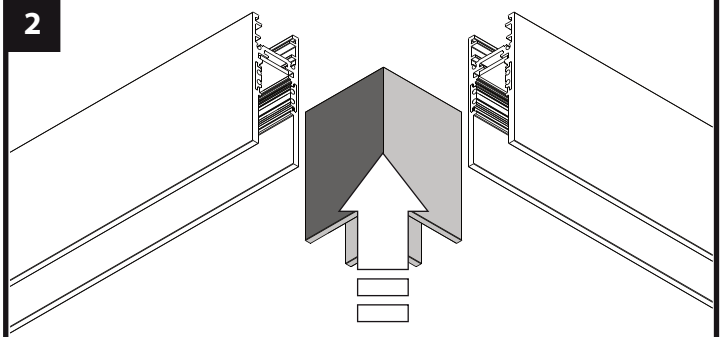

3

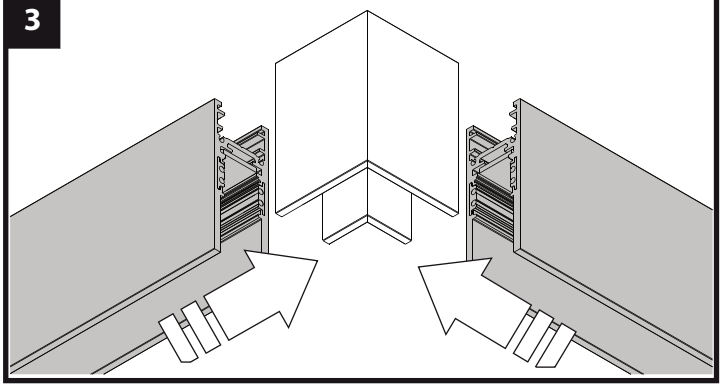

4

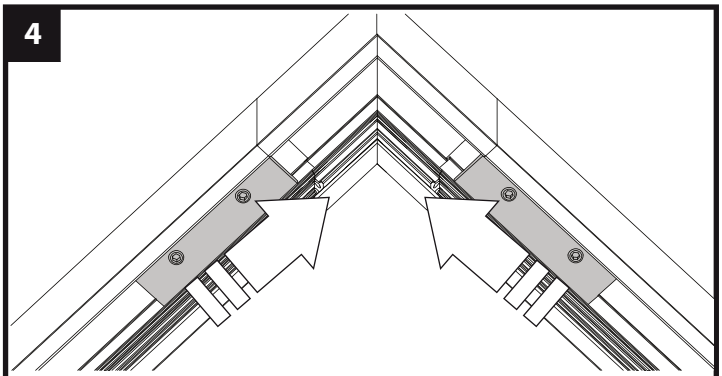

5

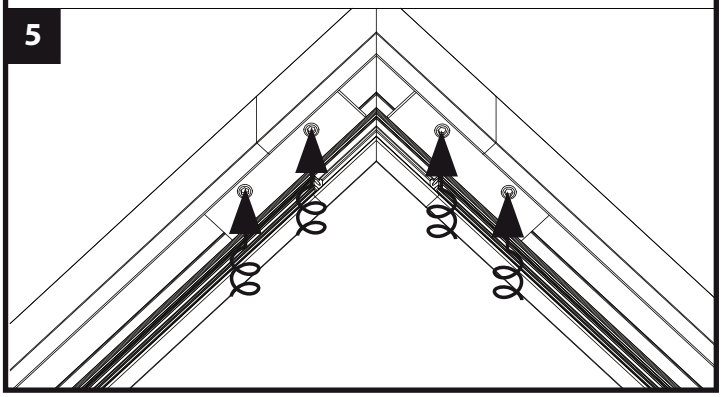

SLM26H - CORNER SET R90°

R200

SLM26H - CORNER SET R 90°
23359 0690

ACCESSORY SET
DIN911/1.5 1x
DIN911/3 1x
4x
2x

1

2
2x

3
2x
B
A

4
2x
A
B

5
PUSH
"CLICK"
90°

SLM26H - CORNER SET R 135°



SLM26H - CORNER SET R 135°
23359 0700

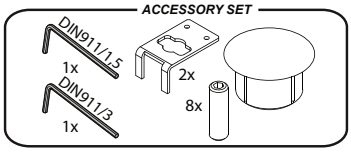

1

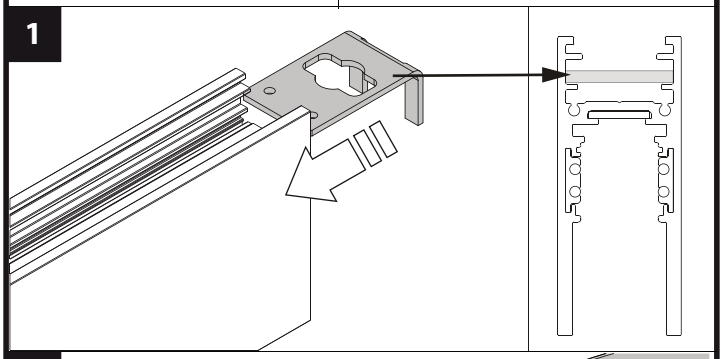

2

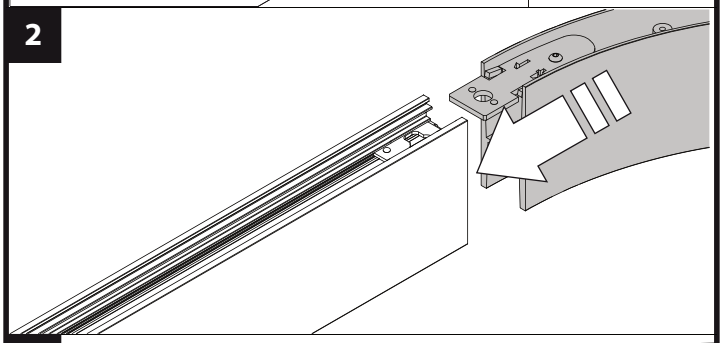

3

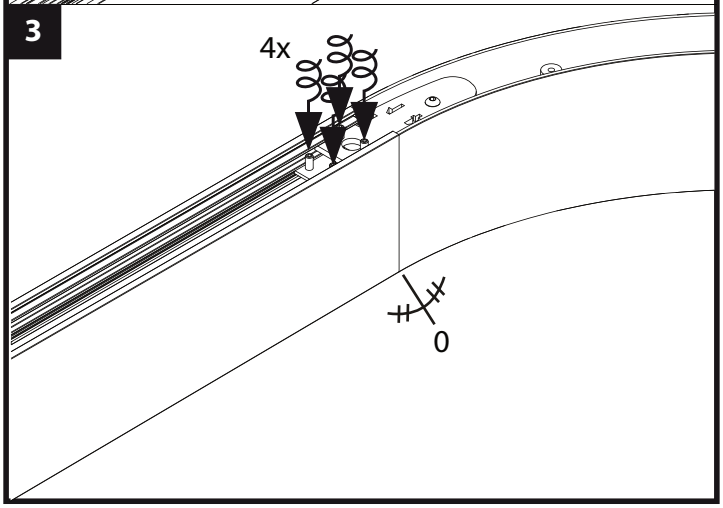

5

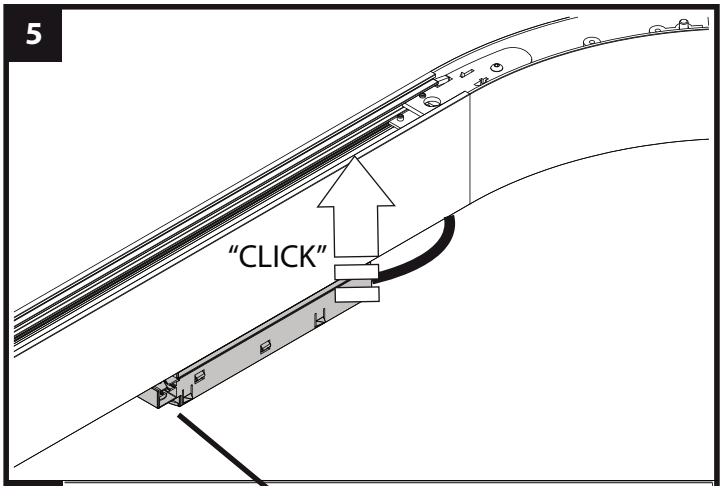

6

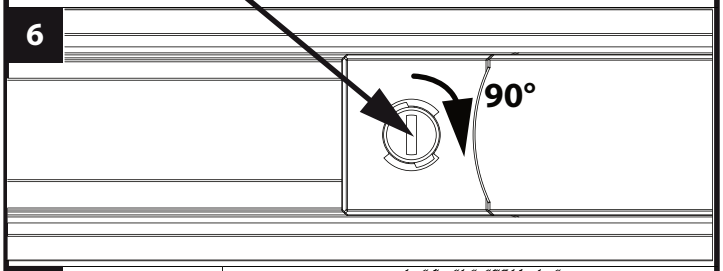

7

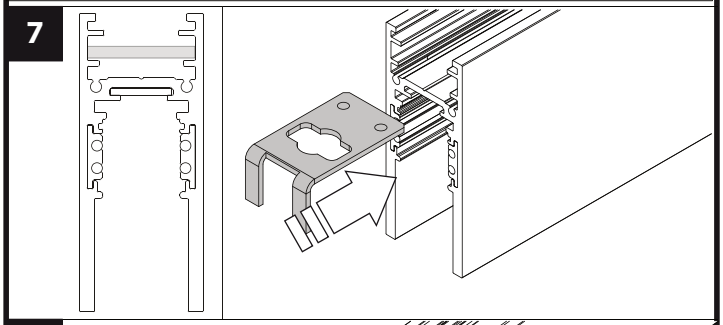

9

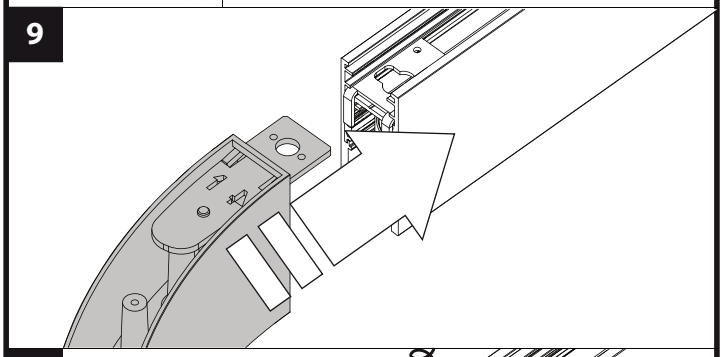

10

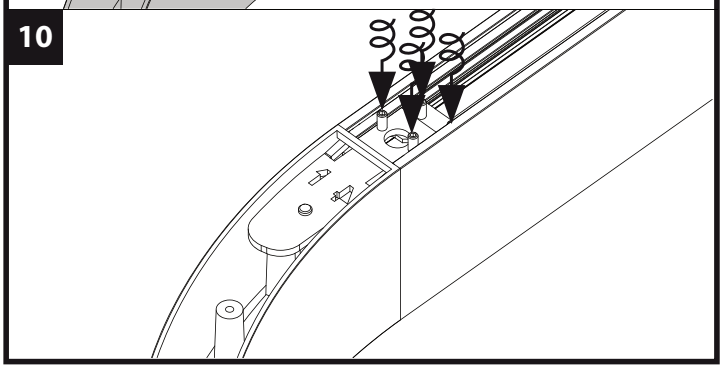

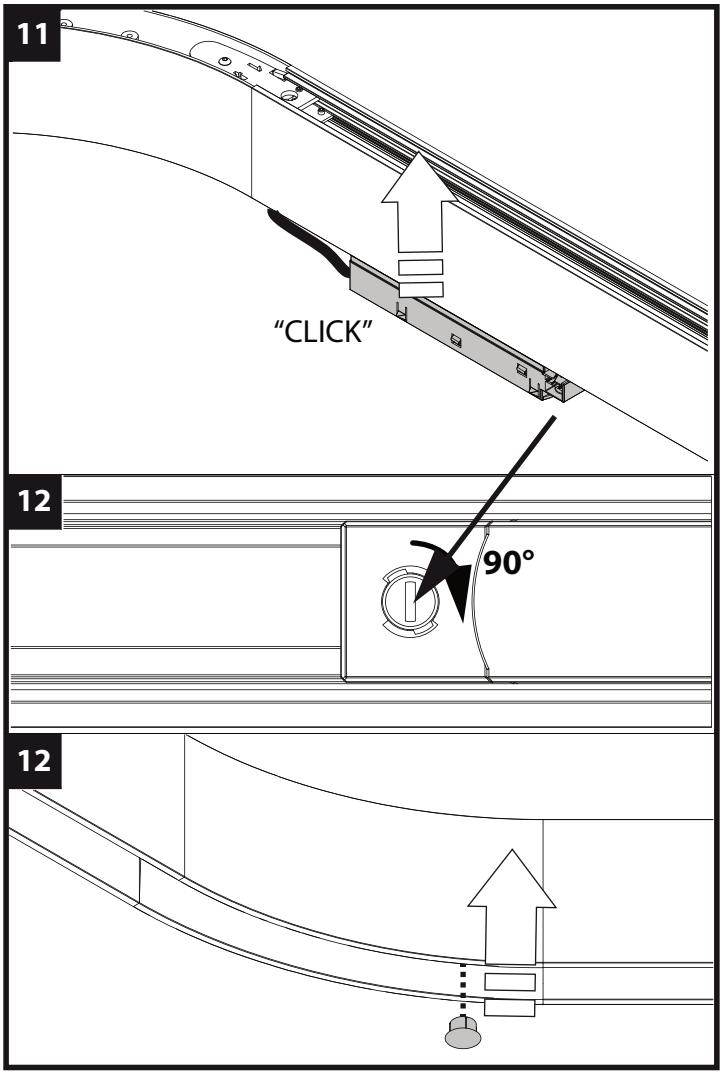

FIXATION

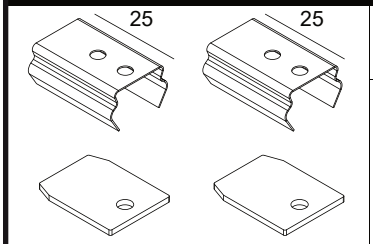

SLM26H - FIXATION SET
23359 1410

⚠ Min. 2x / 1m

POSITION FOR INSTALLATION

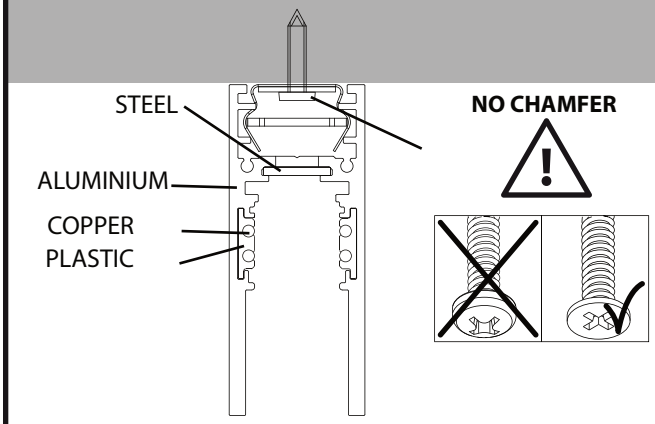

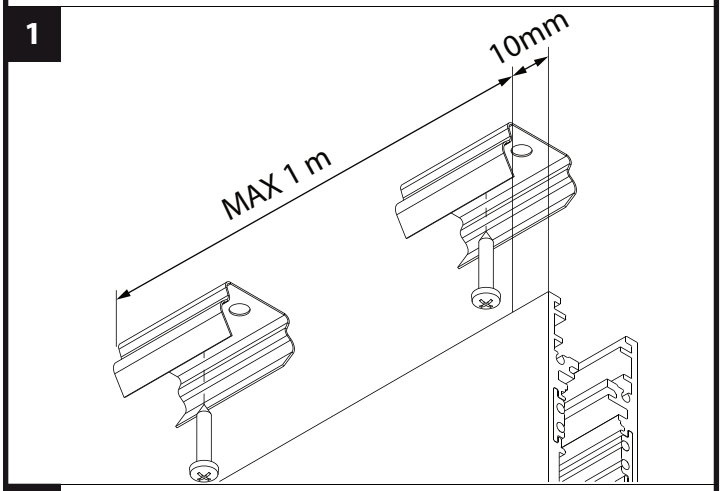

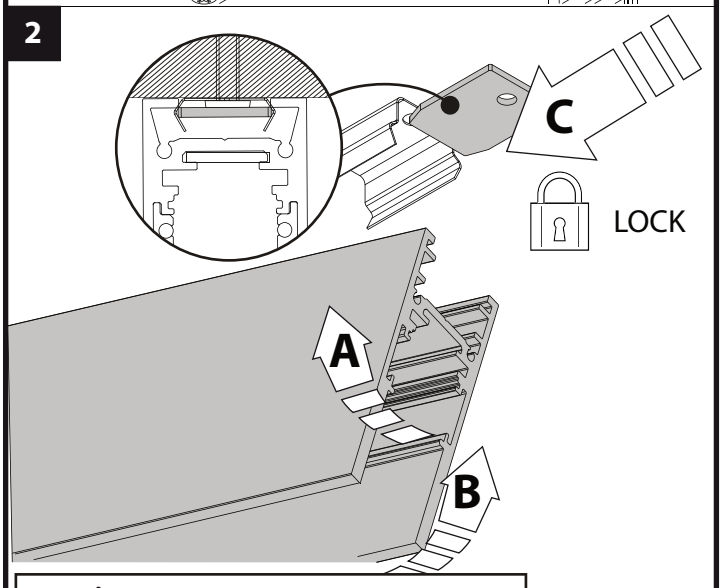

⚠ IF LOCK NOT ACCESSIBLE, FIX BY DRILL & SCREW

SUSPENSION SINGLE 1,6m



SLM - Suspension single 1,6m
23359 0510



1

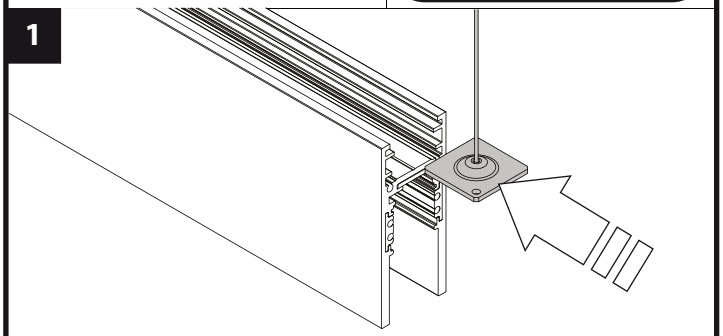

2

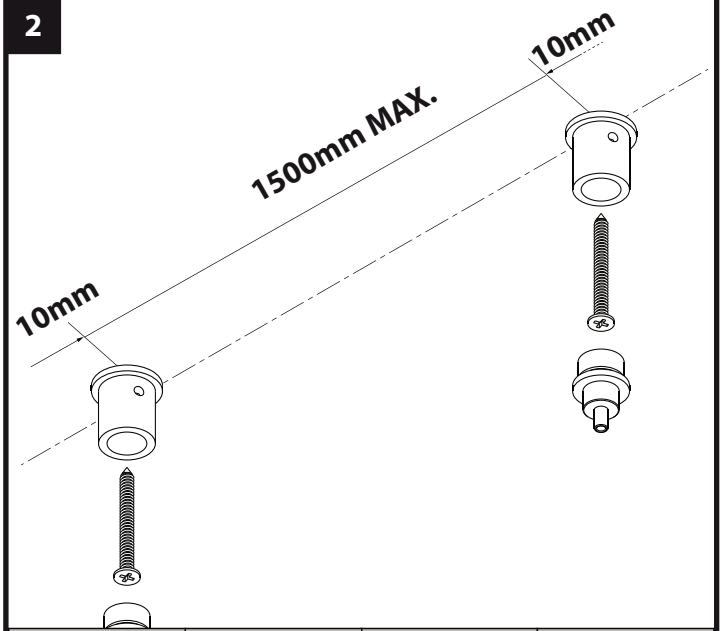

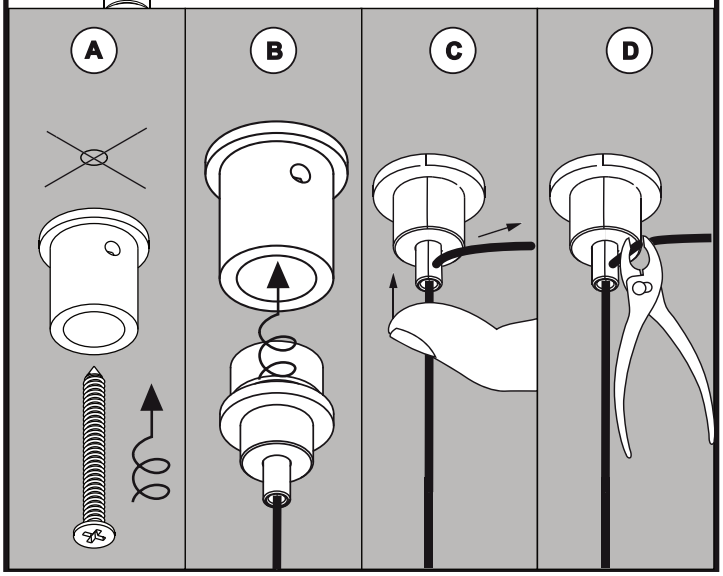

SLM - ROD SUSPENSION 0,8m



SLM - ROD SUSPENSION 0,8m
23358 1520

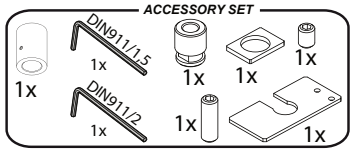

1

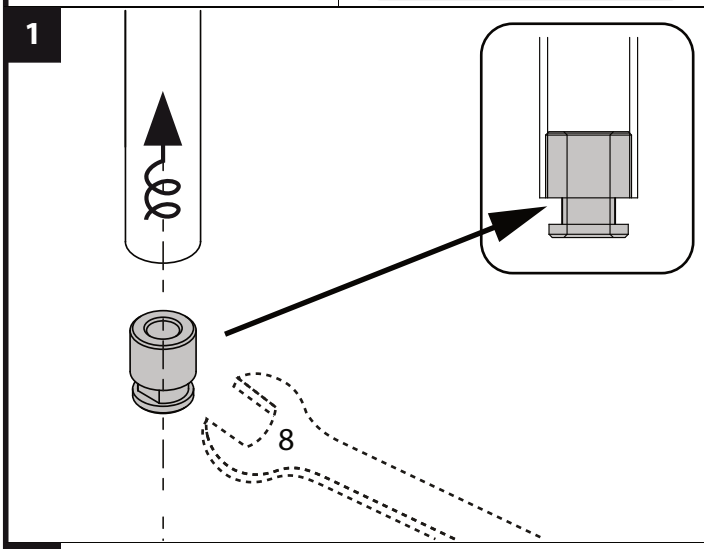

2

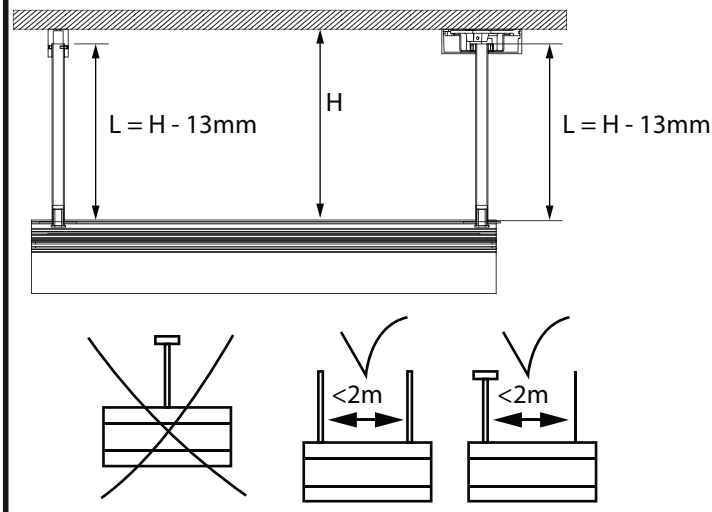

3

SKIP TO #8 IF USING THE FULL LENGTH

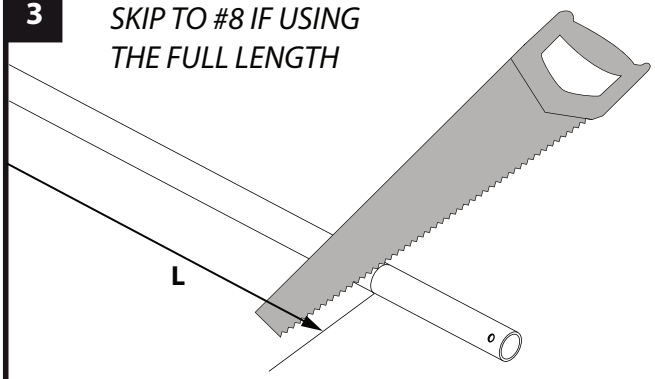

4

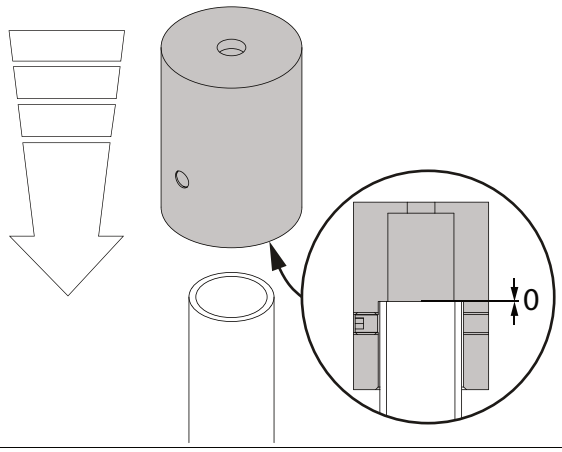

5



6



7

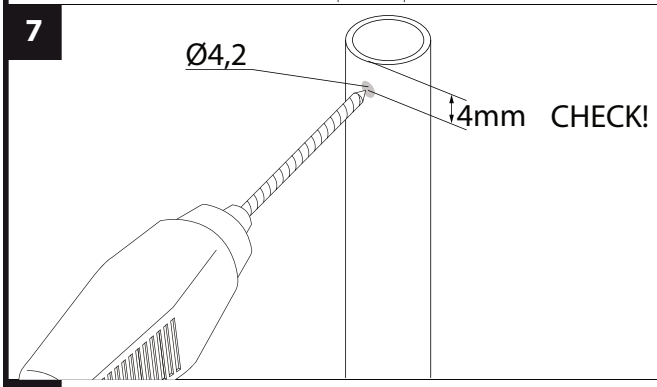

8

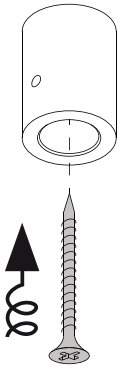

9

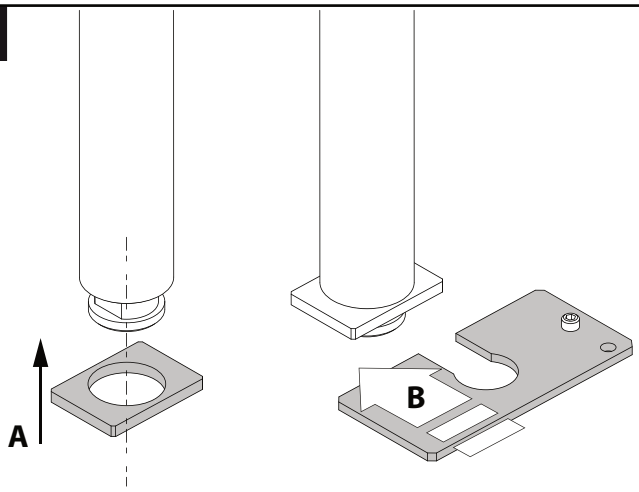

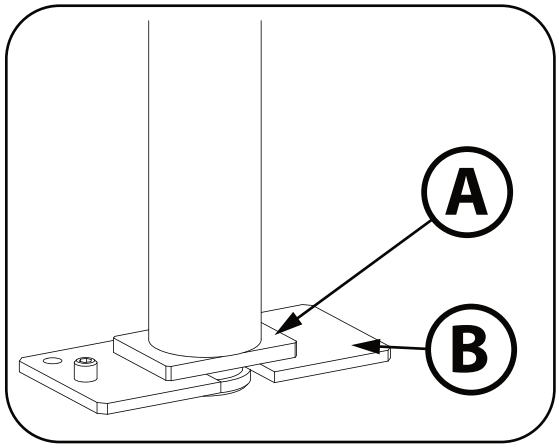

10

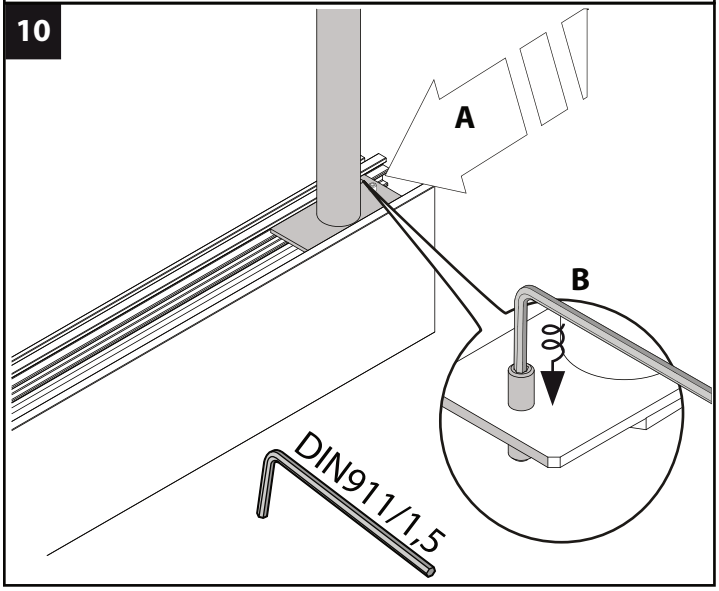

11

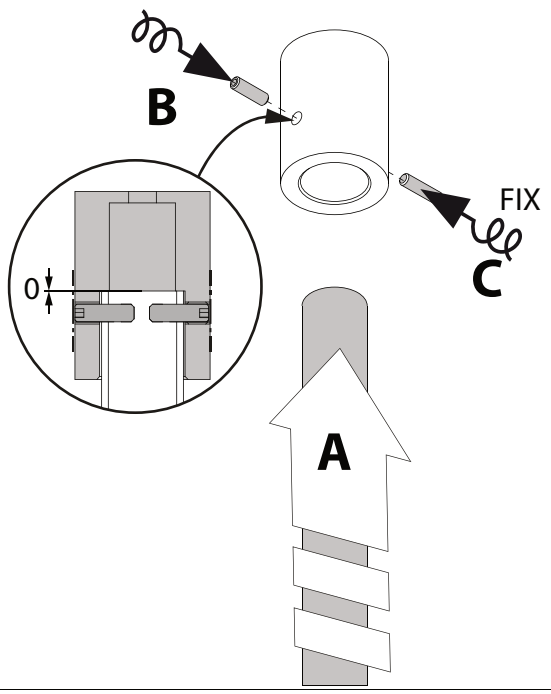

12

MIN 1X
SLM - ROD SUSPENSION 0,8m

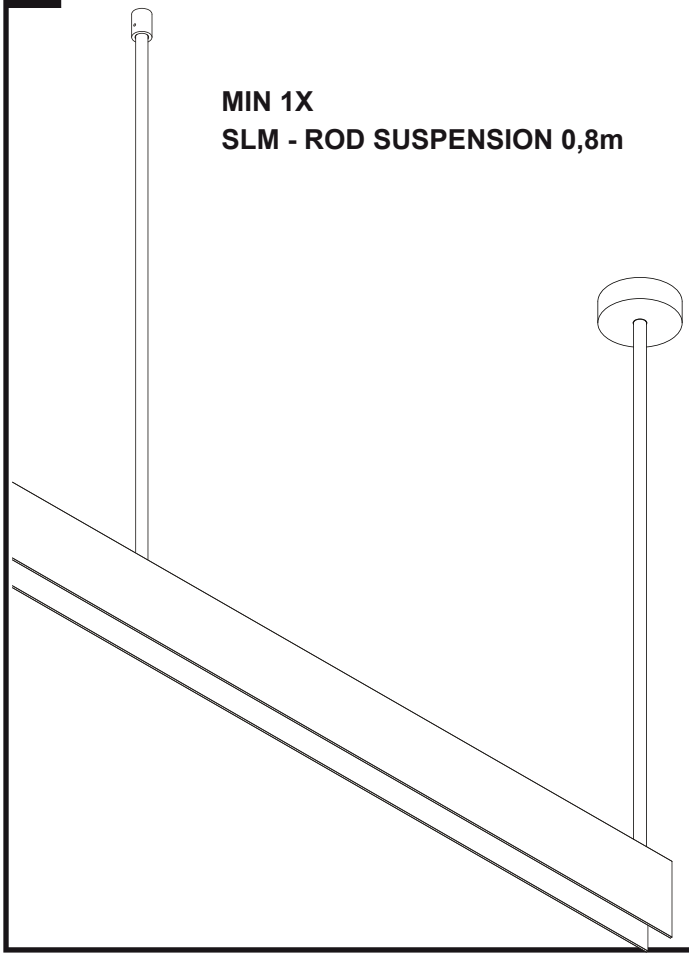

SLM - ROD SUSPENSION 0,8m + CONNECTION

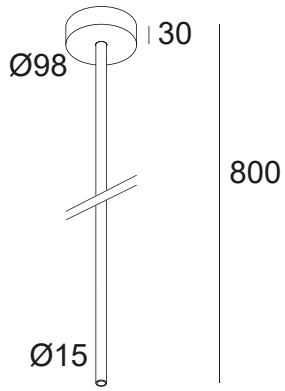

SLM - ROD SUSPENSION 0,8m + Connection
23358 1510

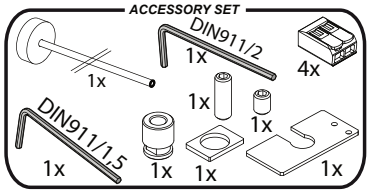

REQUIRED:
CURRENT SUPPLY SET

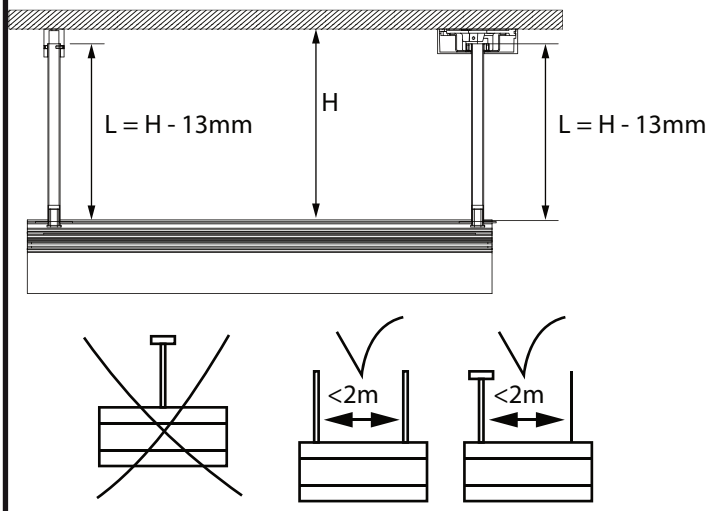

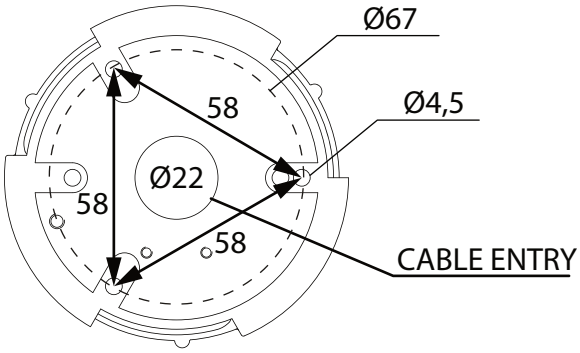

1

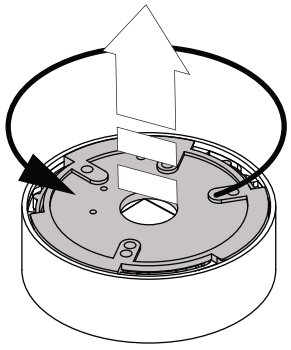

2

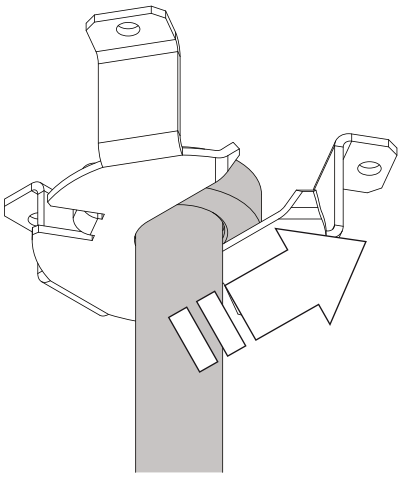

3

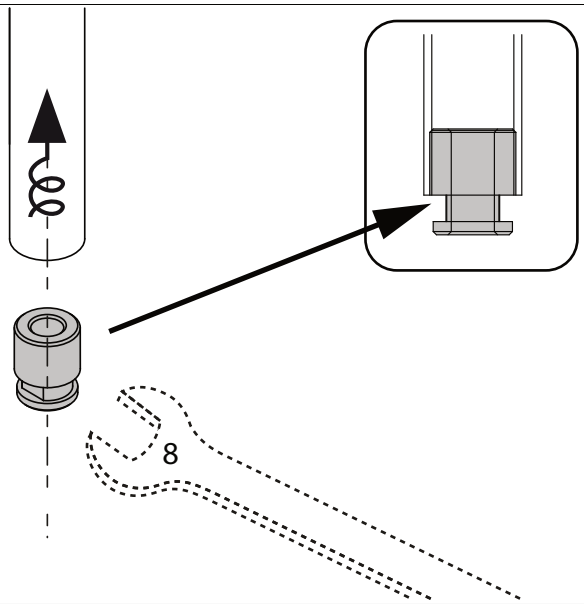

4

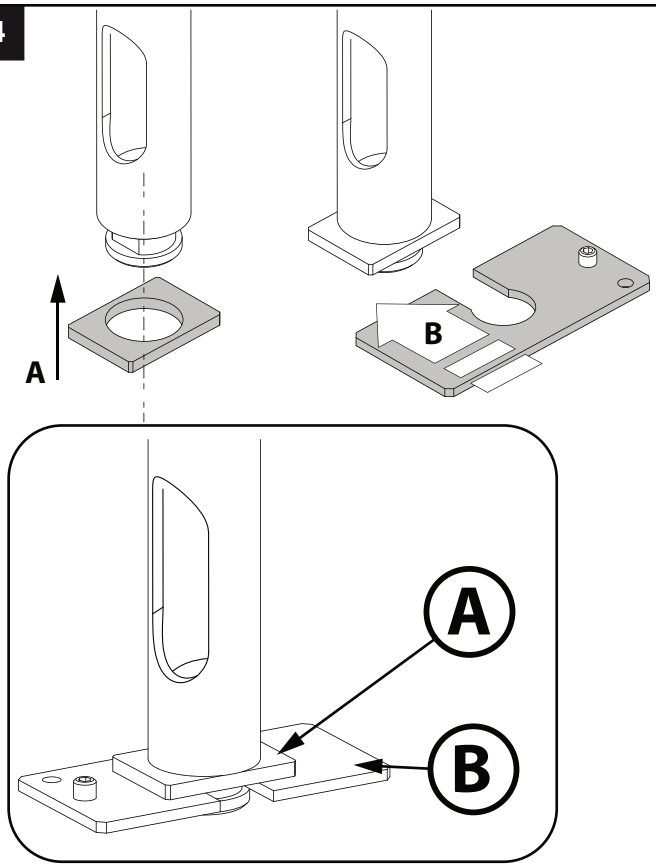

5

SKIP TO #10 IF USING THE FULL LENGTH

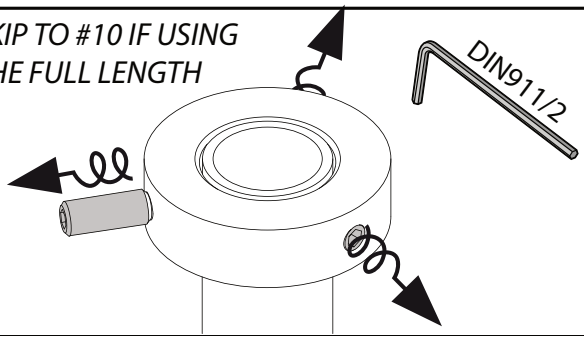

6

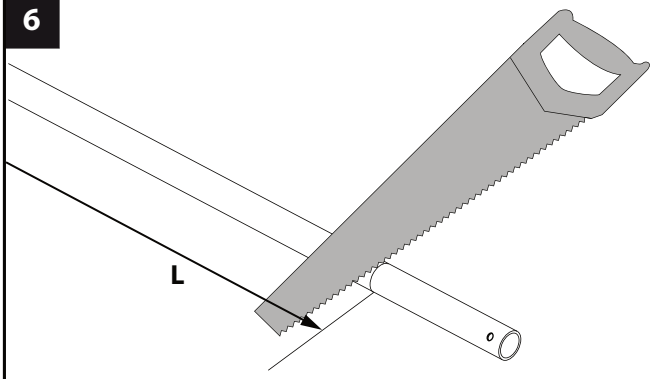

7

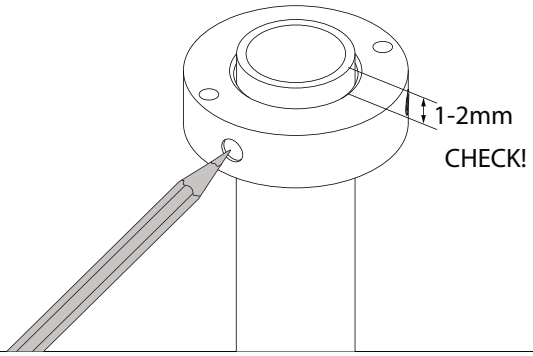

8

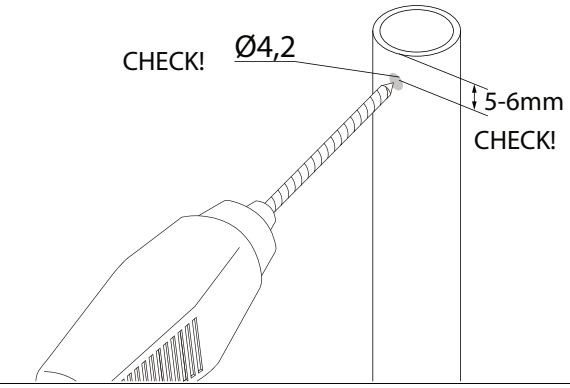

9

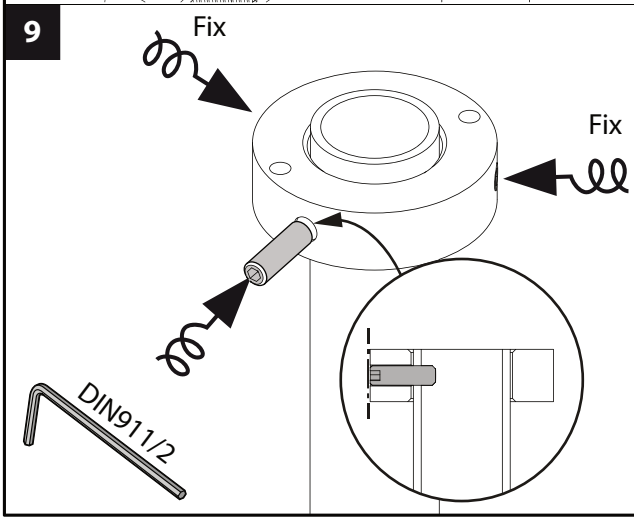

10

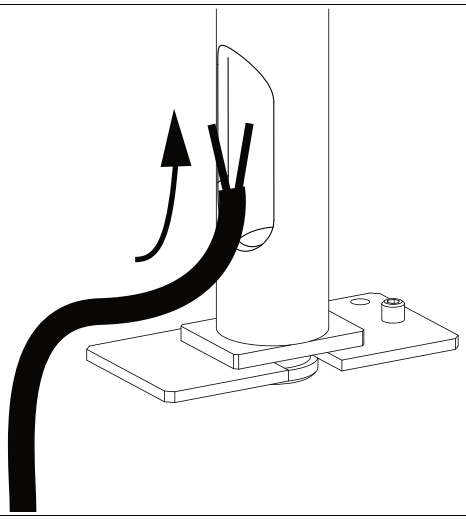

11

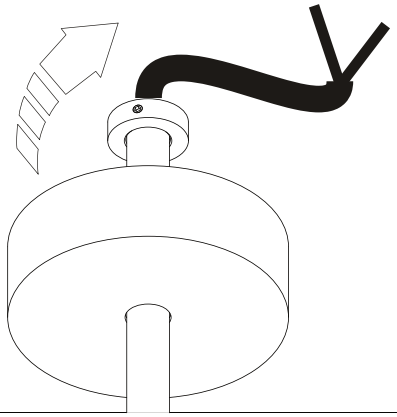

12

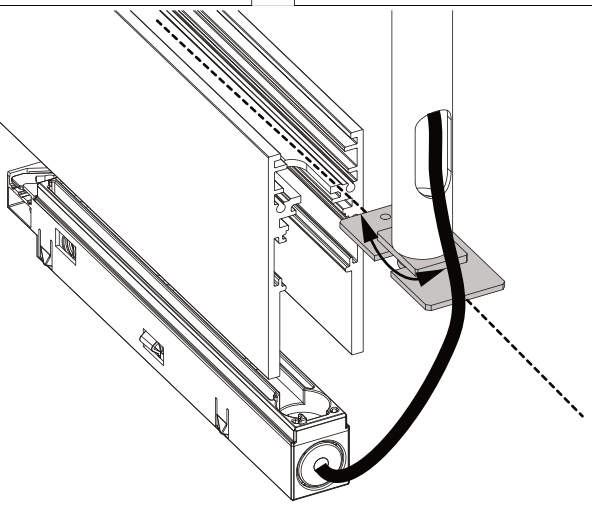

13

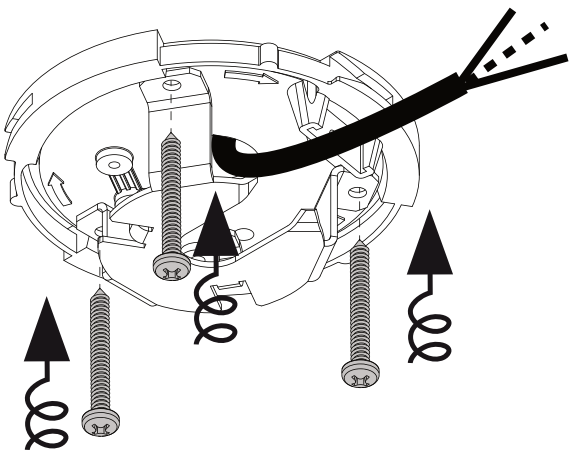

14

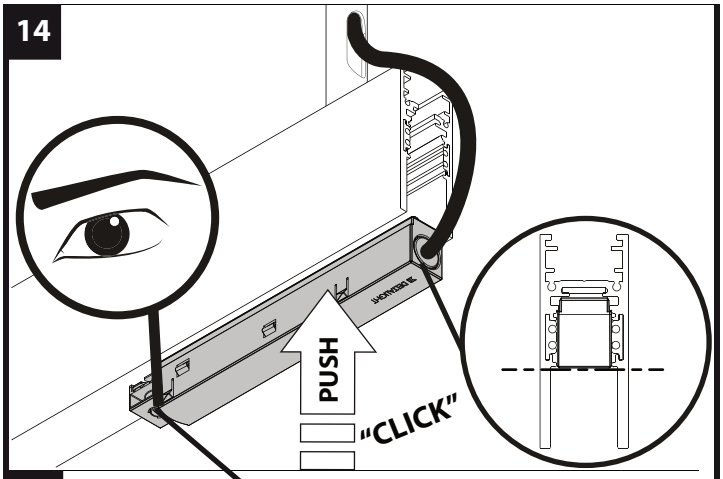

15

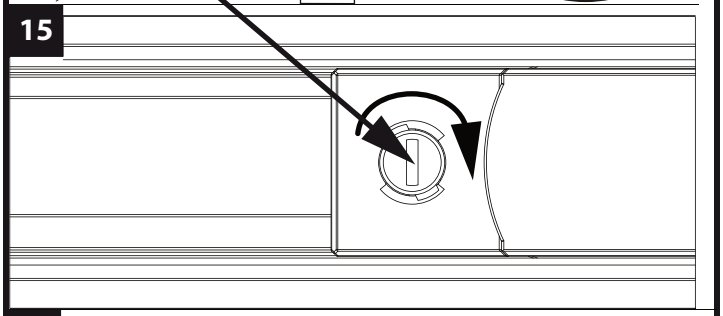

16

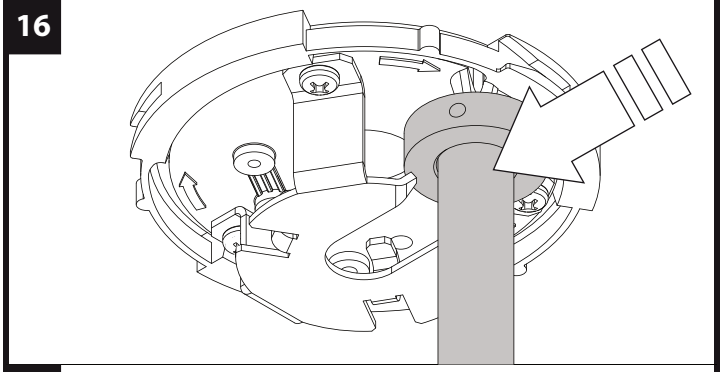

17

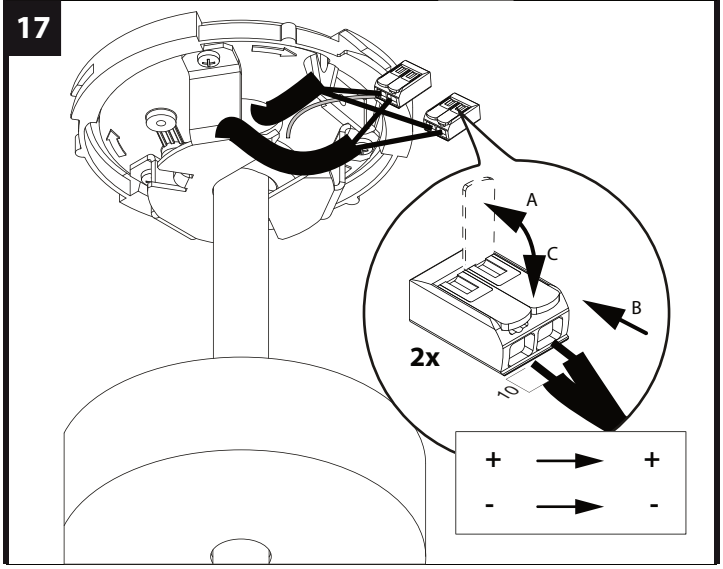

18

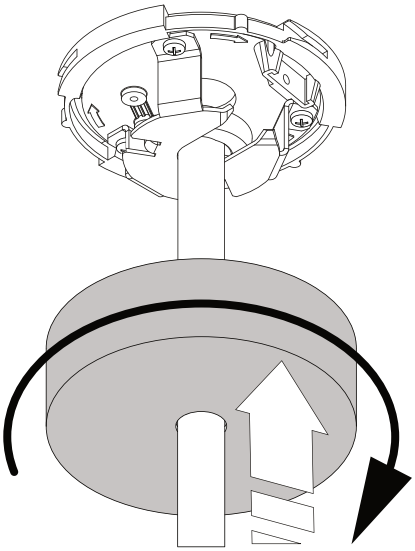

19

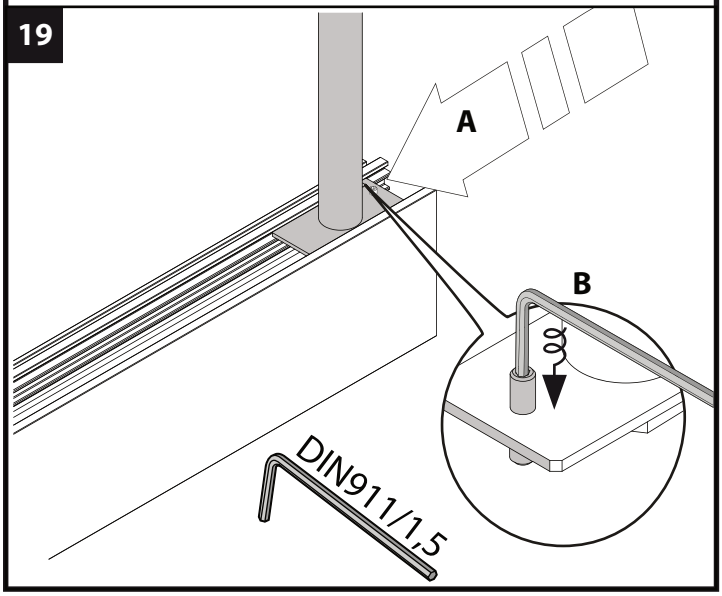

SPM - SUPPLY 48V



SPM - SUPPLY 48V
420 99 03

48V-DC
MAX. 200W
MAX. 50M

Connector should only be connected to SELV Voltage

DA1 & DA2 : DALI
CHANNELS FOR ED5 MODULES
Or 48V-DC CIRCUIT 2

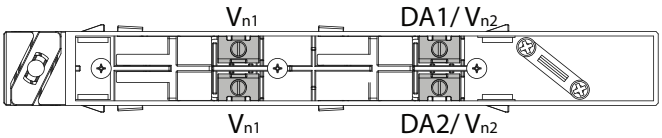

1

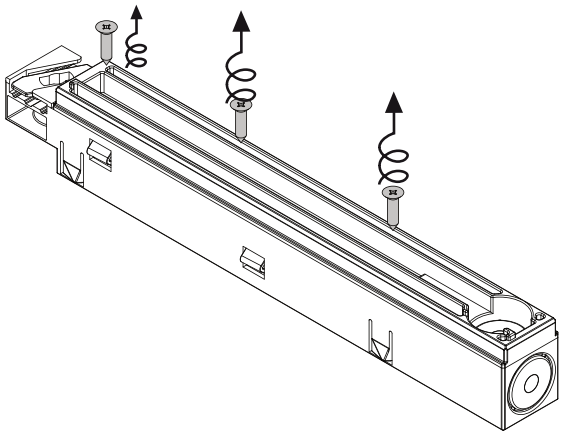

2

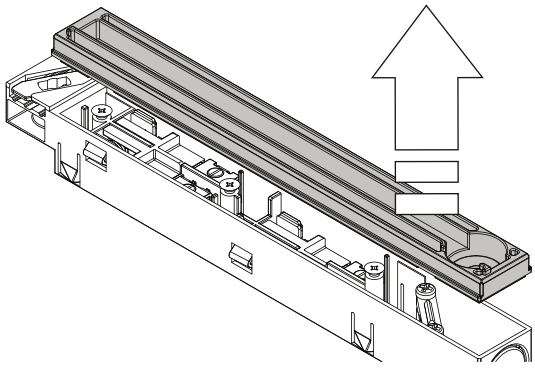

3

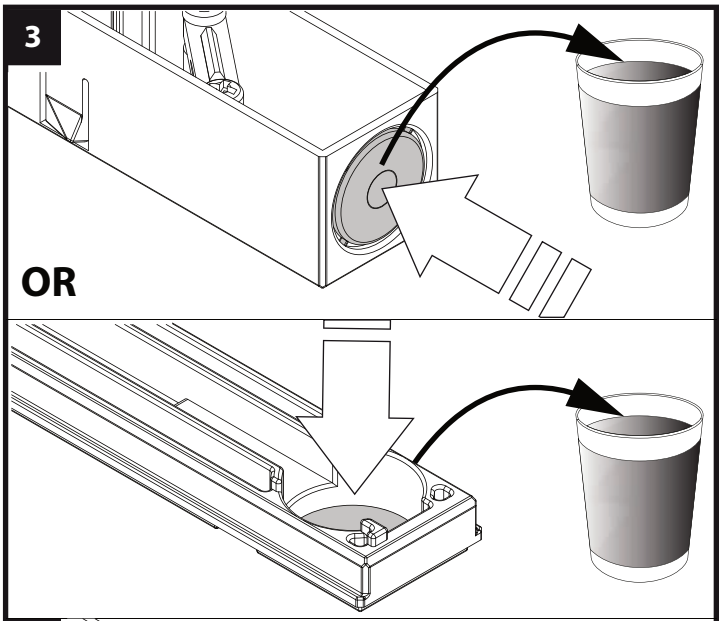

4

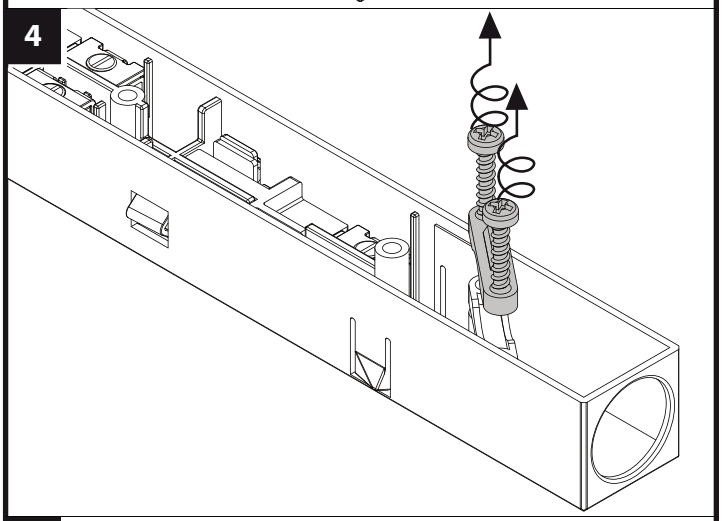

5

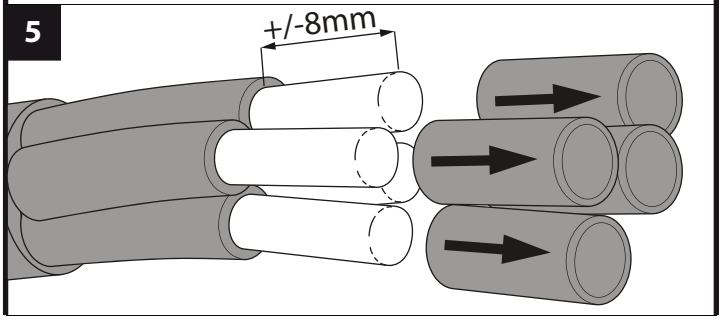

6

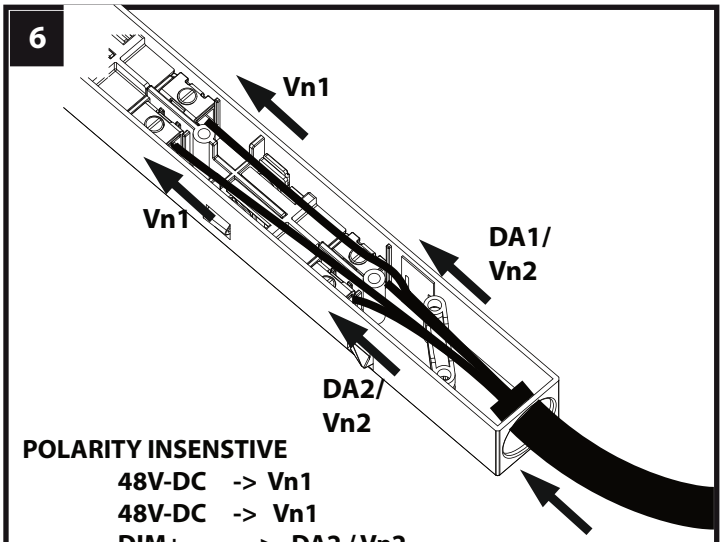

POLARITY INSENSTIVE

48V-DC -> Vn1
48V-DC -> Vn1
DIM+ -> DA2 / Vn2
DIM- -> DA1 / Vn2

OR

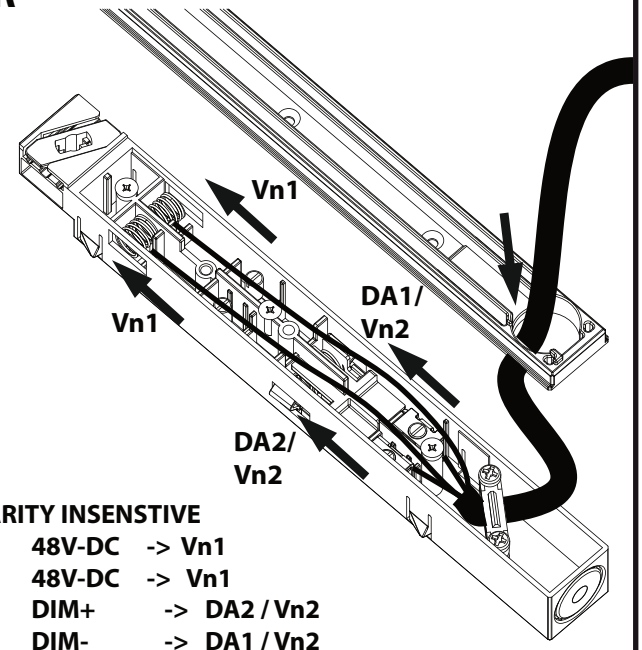

POLARITY INSENSTIVE

48V-DC -> Vn1
48V-DC -> Vn1
DIM+ -> DA2 / Vn2
DIM- -> DA1 / Vn2

7

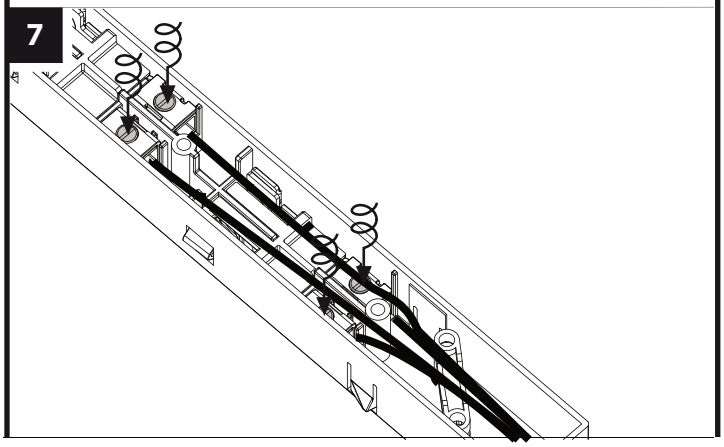

8

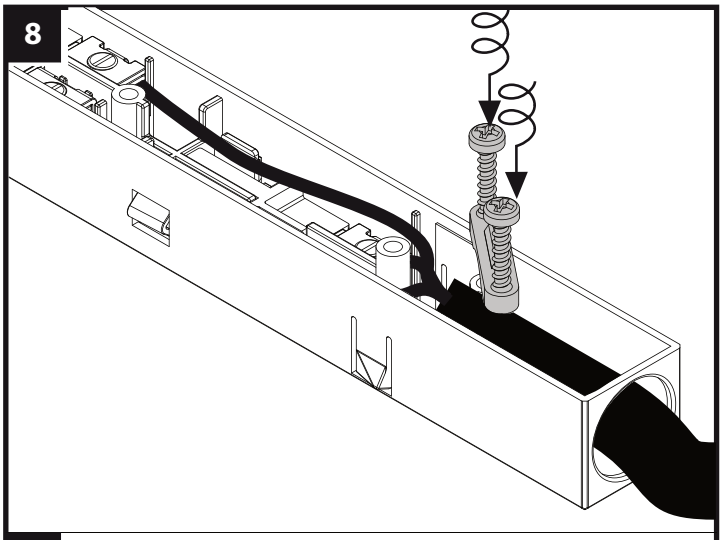

9

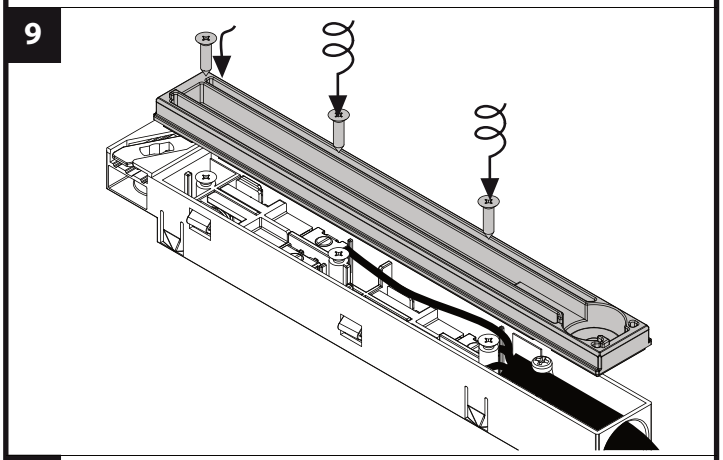

10

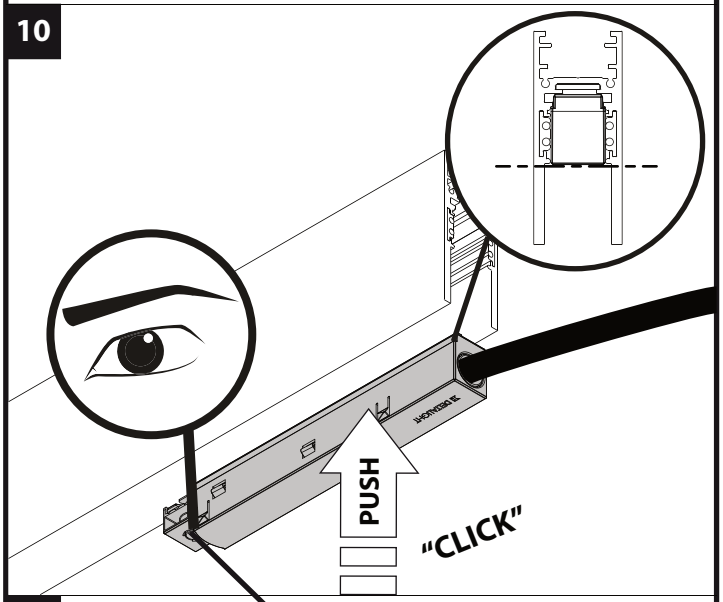

11

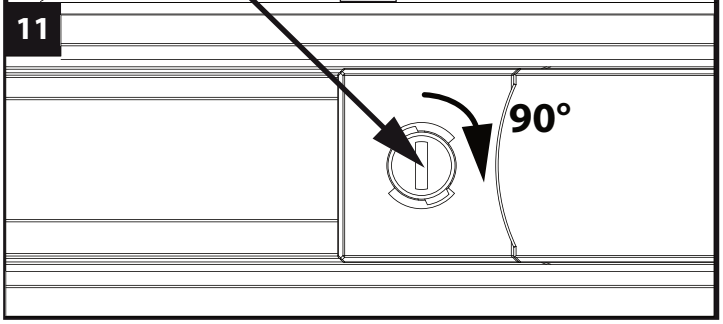

SPM - CONNECTOR 48V - 180°



SPM - CONNECTOR 48V - 180°
420 99 01

48V-DC
MAX. 200W
MAX. 50M

CAUTION TO REDUCE THE RISK OF OVERHEATING AND FIRE, DO NOT BRIDGE CONDUCTORS



1

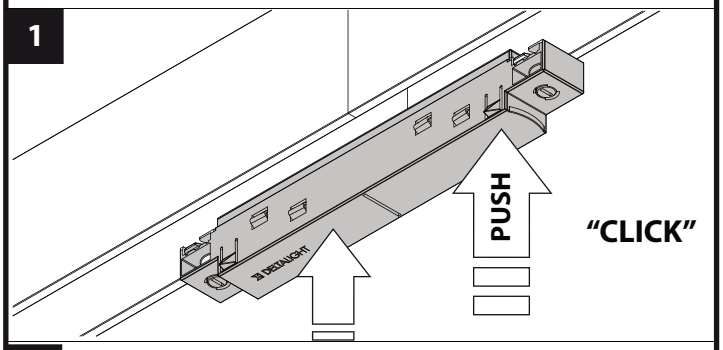

2

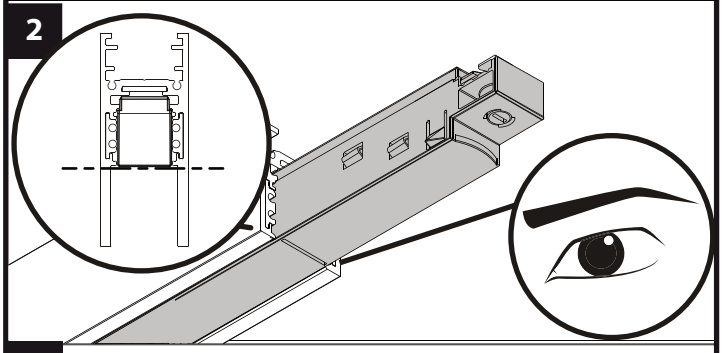

3

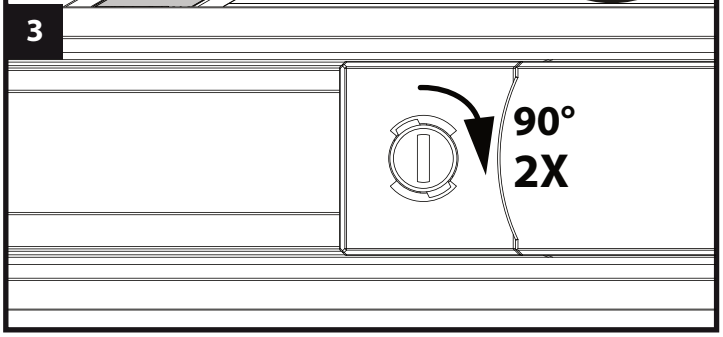

SPM - CONNECTOR 48V - 90°

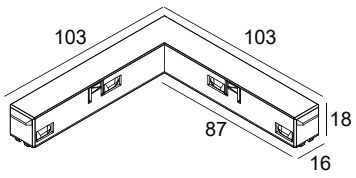

SPM - CONNECTOR 48V-90°
23300 9920

48V-DC
MAX. 200W
MAX. 50M

CAUTION TO REDUCE THE RISK OF OVERHEATING AND FIRE, DO NOT BRIDGE CONDUCTORS

1

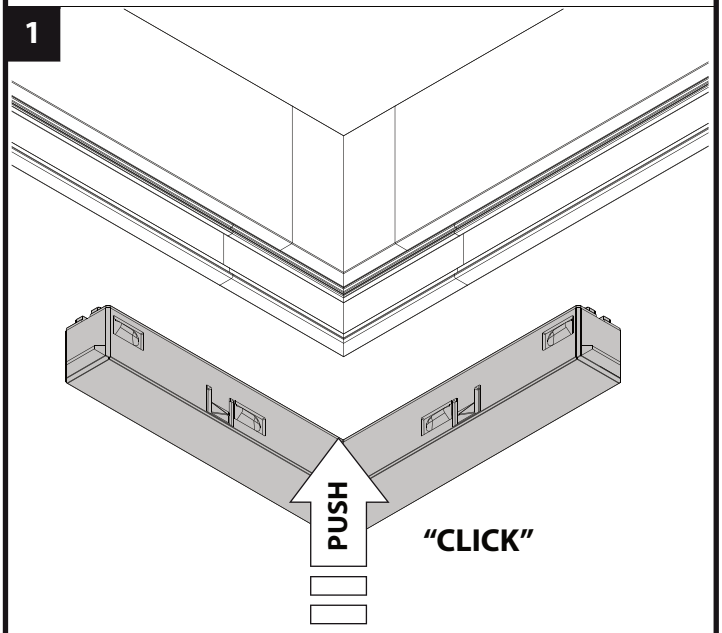

CURRENT SUPPLY SET L 1,6M TRANSPARENT



NO DIM AND NO UPLIGHT	**SLM - CURRENT SUPPLY SET 2 x 0,75mm² 1,6m MDL 23359 2120**
DIM5	**SLM - CURRENT SUPPLY SET 4 x 0,75mm² 1,6m DIM5 23359 2140**
UPLIGHT	**SLM - CURRENT SUPPLY SET 4 x 0,75mm² 1,6m MDL UP 23359 2340**
DIM5 AND UPLIGHT	**SLM - CURRENT SUPPLY SET 6 x 0,75mm² 1,6m DIM5 UP 23359 2160**

1

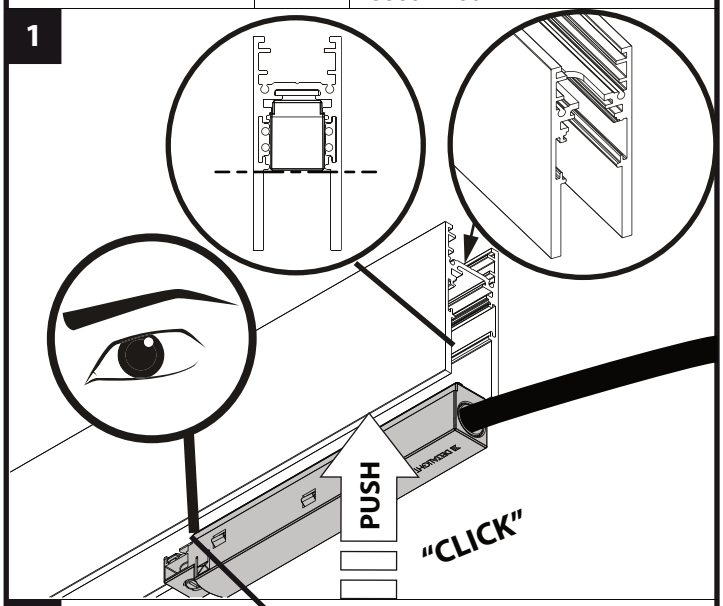

2

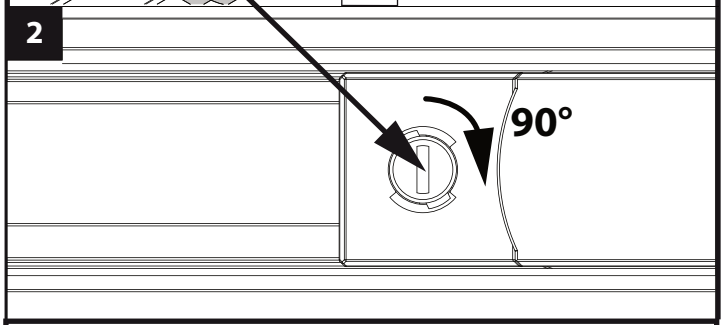

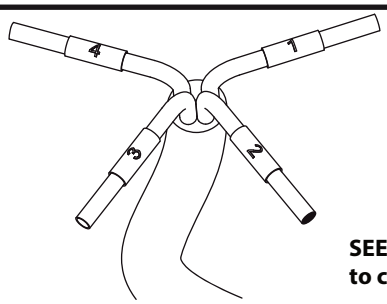

1 - 48V
2 - 48V
3 / + 24V
4 / - 24V

SEE "SPM - SUPPLY 48V" to connect the wires

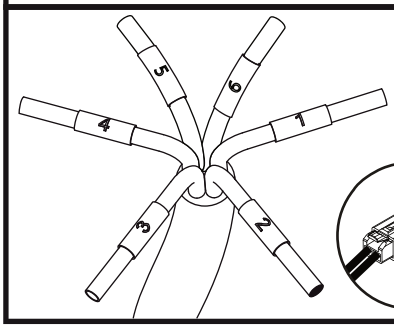

1 - 48V
2 - 48V
3 / DIM+
4 / DIM-
5 / + 24V
6 / - 24V



Connect to uplight

CURRENT SUPPLY SET L 1,6M BLACK



NO DIM AND NO UPLIGHT	SLM - CURRENT SUPPLY SET 2 x 0,75mm² 1,6m MDL 23359 2220
DIM5	SLM - CURRENT SUPPLY SET 4 x 0,75mm² 1,6m DIM5 23359 2240
UPLIGHT	SLM - CURRENT SUPPLY SET 4 x 0,75mm² 1,6m MDL UP 23359 2440
DIM5 AND UPLIGHT	SLM - CURRENT SUPPLY SET 6 x 0,75mm² 1,6m DIM5 UP 23359 2260

1

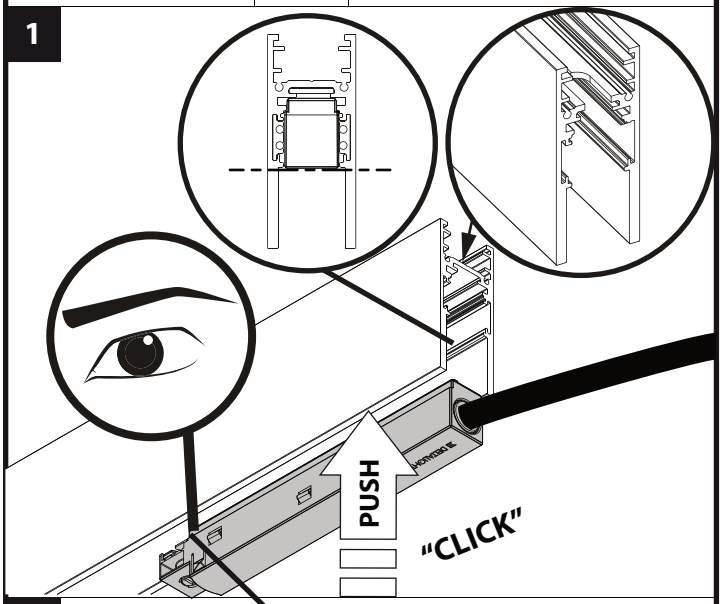

2

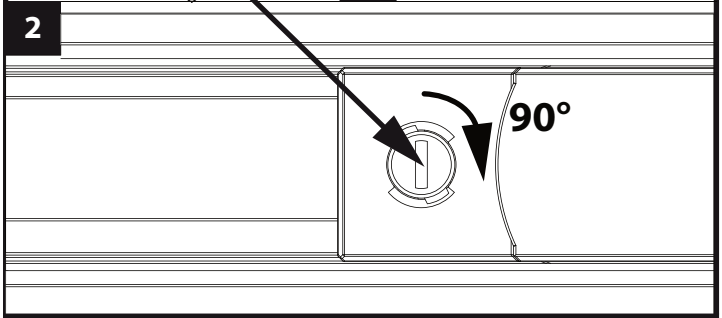

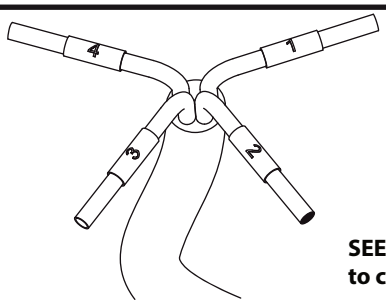

1 - 48V
2 - 48V
3 / + 24V
4 / - 24V

SEE "SPM - SUPPLY 48V" to connect the wires

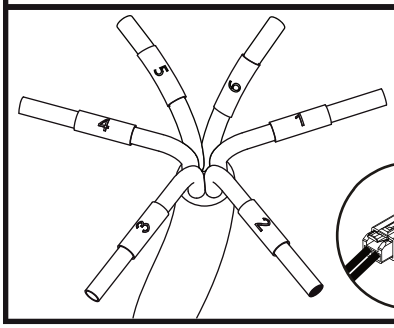

1 - 48V
2 - 48V
3 / DIM+
4 / DIM-
5 / + 24V
6 / - 24V



Connect to uplight

SLM26H - END CAP SET



SLM26H - END CAP SET 23359 0300

TO BE INSTALLED BEFORE INSTALLTING THE PROFILE



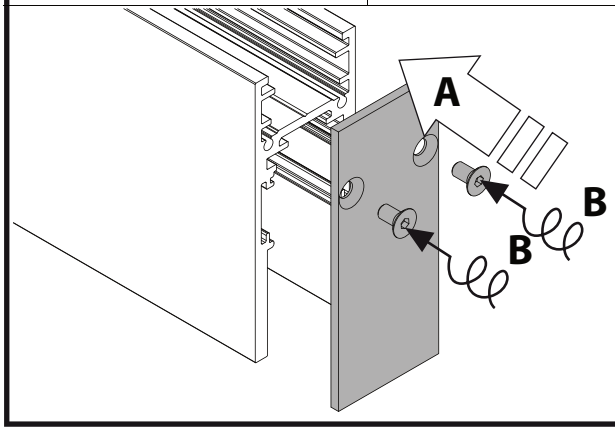

SLM26H - END CAP



SLM26H - END CAP SET 23359 0320

SET OF 2 PCS

TO BE INSTALLED BEFORE INSTALLTING THE PROFILE

1

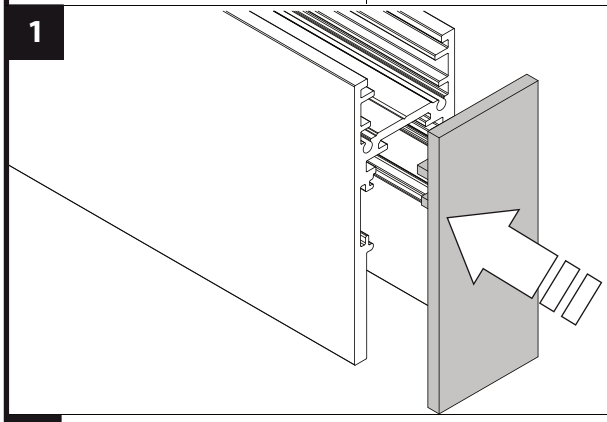
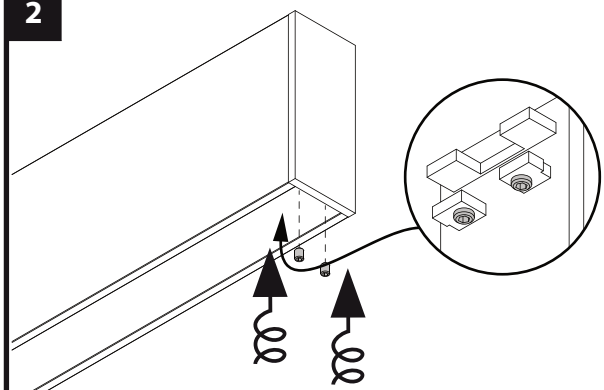
2