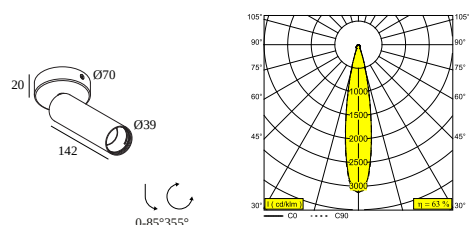




SPY 39 L ON 93020

REFERENCE 24136 9320 W

AVAILABLE IN
BLACK 24136 9320 B
FLEMISH BRONZE 24136 9320 FBR
FLEMISH GOLD 24136 9320 FG
FULL WHITE 24136 9320 FW
GOLD COLOURED 24136 9320 GC
WHITE 24136 9320 W



 [View on website](#)



General info

LOCATION	indoor
INSTALLATION	Ceiling Surface mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.5
ADJUSTABILITY	0° to 85° swiveling, 355° rotatable
INFORMATION	REFLECTOR FL-20° EXCL.LED POWER SUPPLY 350-500mA-DC

Electrical info

CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	D
CERTIFICATES	CB, ENEC, LCA

Lightsource info

LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 5,8-8,6W / CRI>90 (R9: 52) / 3000K / 787-1089lm
TM-30 VALUES	Rf: 90 / Rg: 99
SDCM	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	20°
LED TECHNICS (LIGHT SOURCE)	1089lm // 8,6W // 127lm/W
LED TECHNICS (LUMINAIRE)	683lm // 9,9W // 69lm/W

Requirements

SPY 39 L TUBE
 LED POWER SUPPLY 350 / 500mA-DC DIM

Options

COVERSET R 90-100

For detailed installation instructions, please consult the manual : [24136_XXX0_HAND.pdf](#)

FINISH YOUR SPECIFICATION


LED power supplies

of Fixtures



of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current




300 48 350 ED1 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM1

2

Dimtype: 1-10V

Cutout dimension (mm): 30




300 48 350 ED5 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5

2

Dimtype: DALI

Cutout dimension (mm): 45




300 48 350 MDL LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W MDL

2

Dimtype: non-dimmable

Cutout dimension (mm): 30




300 48 350 WDL LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W WDL

2

Dimtype: WDL = wireless dimmable

Cutout dimension (mm): 45




300 48 500 ED1 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM1

2

Dimtype: 1-10V

Cutout dimension (mm): 30




300 48 500 ED5 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5

2

Dimtype: DALI

Cutout dimension (mm): 45




300 48 500 MDL LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W MDL

2

Dimtype: non-dimmable

Cutout dimension (mm): 30



300 48 500 WDL LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W WDL











2

Dimtype: WDL = wireless dimmable

Cutout dimension (mm): 45

SPY 39 L ON 93020











24136 9320 W

	300 90 61 LED POWER SUPPLY MULTI-POWER DIM6 Dimtype: mains (phase cut-off) or push button Cutout dimension (mm): 56	2 2	☐
	300 90 63 LED POWER SUPPLY MULTI-POWER DIM9 Dimtype: 1-10V or DALI or push button Cutout dimension (mm): 82	4(4) 4(4)	☐
	300 90 64 LED POWER SUPPLY MULTI-POWER DIM7 Dimtype: 1-10V or push button Cutout dimension (mm): 72	2(2) 2(1)	☐
	300 90 67 LED POWER CONVERTER 24V-DC TO MULTI CURRENT 48W DIM9 Dimtype: 1-10V or DALI or push button	2 -	☐
	300 90 68 LED POWER SUPPLY MULTI-POWER DIM5 Dimtype: DALI Cutout dimension (mm): 72	2(2) 2(1)	☐
	300 90 69 LED POWER SUPPLY MULTI-POWER HV DIM9 Dimtype: 1-10V or DALI or push button Cutout dimension (mm): 84	2->6(6) 6(4)	☐
	300 90 124 LED POWER SUPPLY MULTI-POWER DIM7 Dimtype: 1-10V or push button Cutout dimension (mm): 55	3(2) 2(1)	☐
	300 90 125 LED POWER SUPPLY MULTI-POWER MINI DIM5 Dimtype: DALI Cutout dimension (mm): 55	2(2) 2(1)	☐
	300 90 135 LED POWER SUPPLY MULTI-POWER HV Dimtype: non-dimmable Cutout dimension (mm): 90	3->4 2->4	☐
	21012 0010 LED POWER SUPPLY MULTI POWER Dimtype: non-dimmable Cutout dimension (mm): 50	2 2	☐

DELTALIGHT

SPY 39 L ON 93020





24136 9320 W

	21012 0021 LED POWER SUPPLY MULTI POWER DIM1 Dimtype: 1-10V Cutout dimension (mm): 54	3 3	☐
	21012 0035 LED POWER SUPPLY MULTI POWER DIM5 Dimtype: DALI Cutout dimension (mm): 54	3 3	☐
	21012 004W LED POWER SUPPLY MULTI-POWER WDL Dimtype: WDL = wireless dimmable Cutout dimension (mm): 84	4(4) 3(3)	☐
	21012 005W LED POWER SUPPLY MULTI-POWER COMPACT WDL Dimtype: WDL = wireless dimmable Cutout dimension (mm): 54	3 3	☐
	21012 0268 LED POWER SUPPLY MULTI POWER 200-350 / 15W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 50	2->2 0	☐
	21012 0278 LED POWER SUPPLY MULTI POWER 500-700 / 20W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 55	1	☐
	21012 0288 LED POWER SUPPLY MULTI POWER 500-700 / 36W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 55	2->3	☐
	21012 0298 LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 48	2 2	☐
	21012 0308 LED POWER SUPPLY 350mA / 7,35W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 40	1	☐
	21012 0318 LED POWER SUPPLY 500mA / 10W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 40	1	☐



DELTALIGHT

SPY 39 L ON 93020

24136 9320 W

	<u>21012 0480</u> LED POWER SUPPLY 350mA-DC / 17W IP68	2(2)	☐
	Dimtype: non-dimmable		
	Cutout dimension (mm): 60		
	<u>21012 0500</u> LED POWER SUPPLY 500mA-DC / 24W IP68	2(1)	☐
	Dimtype: non-dimmable		
	Cutout dimension (mm): 60		
	<u>21032 0295</u> LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5	2	☐
	Dimtype: DALI		
	Cutout dimension (mm): 30		
	<u>21032 0305</u> LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5	2	☐
	Dimtype: DALI		
	Cutout dimension (mm): 30		

Coversets


	<u>204 00 90 ANO</u> COVERSET R 90 ANO	☐
	<u>204 00 90 B</u> COVERSET R 90 B	☐
	<u>204 00 90 W</u> COVERSET R 90 W	☐
	<u>204 00 100 ANO</u> COVERSET R 100 ANO	☐
	<u>204 00 100 B</u> COVERSET R 100 B	☐
	<u>204 00 100 W</u> COVERSET R 100 W	☐

DELTALIGHT

SPY 39 L ON 93020

24136 9320 W

Finish your product

	<u>24144 0020 B</u>	SPY 39 L TUBE B	☐
	<u>24144 0020 FBR</u>	SPY 39 L TUBE FBR	☐
	<u>24144 0020 FG</u>	SPY 39 L TUBE FG	☐
	<u>24144 0020 GC</u>	SPY 39 L TUBE GC	☐
	<u>24144 0020 W</u>	SPY 39 L TUBE W	☐

Notes: