


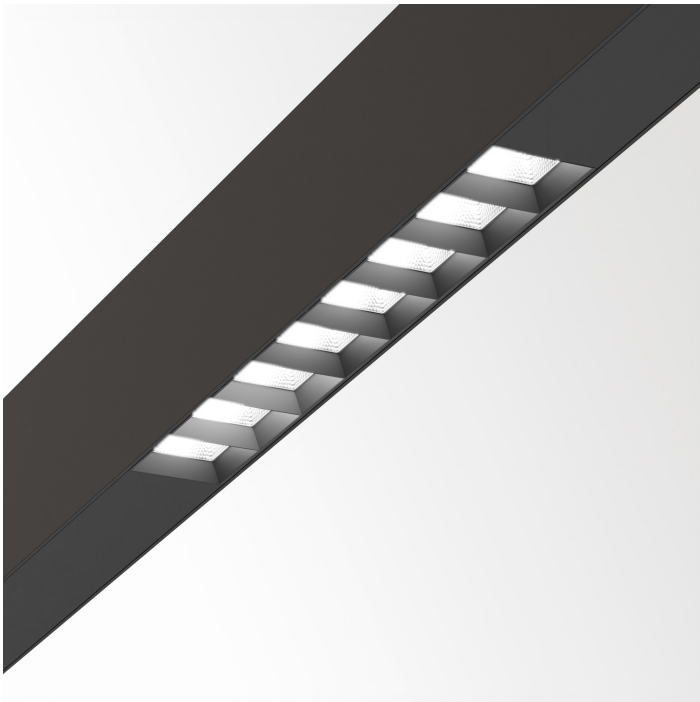

**OML50 - INFORM D HO 1640mm**  
**8+8LED 94063 DIM5**

31414 9435 B

AVAILABLE IN  
**BLACK** 31414 9435 B

 [View on website](#)



| General info                |                                                                                                   |
|-----------------------------|---------------------------------------------------------------------------------------------------|
| LOCATION                    | indoor                                                                                            |
| INGRESS PROTECTION          | IP20                                                                                              |
| WEIGHT (KG)                 | 0                                                                                                 |
| INFORMATION                 | CLUSTER DOWN: 222lm/m<br>INCL.DIMMABLE LED POWER SUPPLY<br>(DALI-2 standard)<br>CABLING 1 CIRCUIT |
| Electrical info             |                                                                                                   |
| ELECTRICAL                  | 220-240V / 0 50-60Hz                                                                              |
| CLASS                       | I                                                                                                 |
| POWER SUPPLY                | YES                                                                                               |
| DIM TYPE                    | DALI                                                                                              |
| ENERGY CLASS                | D                                                                                                 |
| CERTIFICATES                | EPD, RCM                                                                                          |
| Lightsource info            |                                                                                                   |
| LIGHTSOURCE NAME            | LED                                                                                               |
| LIGHTSOURCE                 | LED cluster 24,2W / CRI>90 (R9: 50) / 4000K / 3642lm                                              |
| TM-30 VALUES                | Rf: 90 / Rg: 101                                                                                  |
| SDCM                        | SDCM3                                                                                             |
| RISKGROUP                   | RG1                                                                                               |
| LM80                        | L80 > 60000                                                                                       |
| BEAMANGLE                   | 63°                                                                                               |
| LED TECHNICS (LIGHT SOURCE) | 3642lm // 24,2W // 151lm/W                                                                        |

| Options               |
|-----------------------|
| WIRELESS CONTROL DIM5 |

Notes: