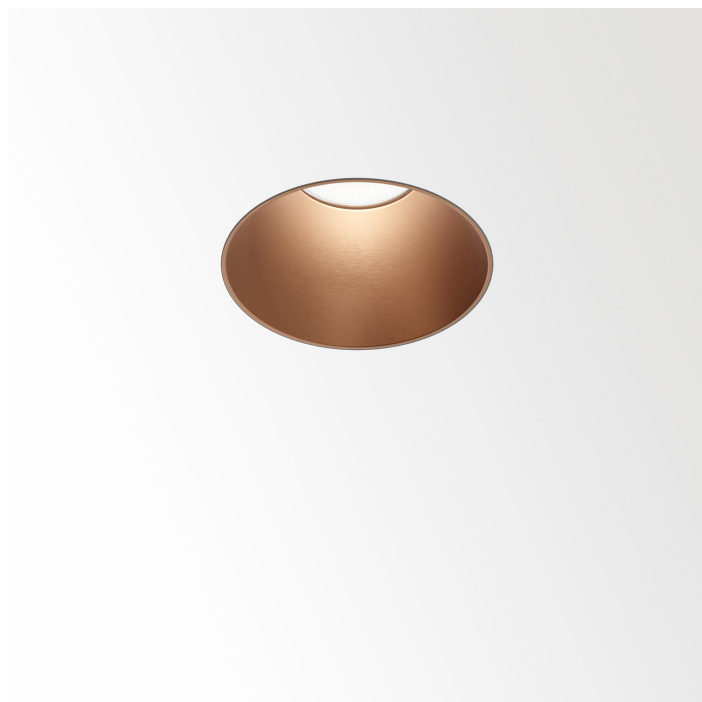






DEEP RINGO TRIMLESS SOFT 93045

19436 9030 BRCU

AVAILABLE IN

BLACK 19436 9030 B
BRUSHED ALU 19436 9030 BRA
BRUSHED ANTHRACITE 19436 9030 BRAT
BRUSHED BROWN BRONZE 19436 9030 BRBB
BRUSHED COPPER 19436 9030 BRCU
BRUSHED GOLD 19436 9030 BRG
BRUSHED OLD BRONZE 19436 9030 BROB
CREAM 19436 9030 CR
FLEMISH BRONZE 19436 9030 FBR
FLEMISH GOLD 19436 9030 FG
GOLD COLOURED 19436 9030 GC
PIANO BLACK 19436 9030 PB
WHITE 19436 9030 W



[View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Ceiling Recessed
CUTOUT SHAPE/SIZE (MM)	round - Ø KIT
RECESSED DEPTH (MM)	95
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.2
ADJUSTABILITY	non adjustable
INFORMATION	REFLECTOR WFL-45° EXCL.DIMMABLE LED POWER SUPPLY 500mA-DC

Electrical info	
CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	F
CERTIFICATES	CB, ENEC, EPD, LCA

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 10,2W / CRI>90 (R9: 50) / 3000K-1800K / 1038lm
SDCM	SDCM2
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	45°
LED TECHNICS (LIGHT SOURCE)	1038lm // 10,2W // 109lm/W
LED TECHNICS (LUMINAIRE)	792lm // 11,7W // 68lm/W

Requirements

LED POWER SUPPLY 500mA-DC DIM (Remote)
MOUNTING KIT R82 TRIMLESS O.F.A.
MOUNTING KIT AIR 101

DEEP RINGO TRIMLESS SOFT 93045

19436 9030 BRCU


For detailed installation instructions, please consult the manual : [19436_XXX0_HAND.pdf](#)

CEILING COMPATIBILITY

Ceiling Type	Mounting Kit	
 System ceiling	 15212 2000 - MOUNTING KIT R82 TRIMLESS O.F.A.	Required
 Plasterboard	 15212 2000 - MOUNTING KIT R82 TRIMLESS O.F.A.	Required
 Stucanet	 15212 2000 - MOUNTING KIT R82 TRIMLESS O.F.A.	Required
 Concrete + plaster	 15212 2000 - MOUNTING KIT R82 TRIMLESS O.F.A.	Required
 Lintel + plaster	 15212 2000 - MOUNTING KIT R82 TRIMLESS O.F.A.	Required
 Hollow-core slab + plaster	 15212 2000 - MOUNTING KIT R82 TRIMLESS O.F.A.	Required
	 29810 0050 - MOUNTING KIT NO AIR 101	Required
	 29810 0100 - MOUNTING KIT SIDE AIR ONLY 1	Required
	 29810 0010 - MOUNTING KIT SIDE AIR 101	Required
	 29810 0210 - MOUNTING KIT TOP AIR 101	Required
	 29810 0200 - MOUNTING KIT TOP AIR ONLY 1	Required
	 29810 0050 - MOUNTING KIT NO AIR 101	Required
 Cold stretched ceiling	 15212 0070 - MOUNTING KIT R82 TRIMLESS CSC	Required
 Warm stretched ceiling	 15212 0150 - MOUNTING KIT R82 TRIMLESS WSC	Required

FINISH YOUR SPECIFICATION

Emergency units



21032 0270 B EMERGENCY UNIT 7W / 1h + LED INDICATOR HOLDER B



Cutout dimension (mm): 27









DELTALIGHT

DEEP RINGO TRIMLESS SOFT 93045

19436 9030 BRCU

21032 0270 W EMERGENCY UNIT 7W / 1h + LED INDICATOR HOLDER W










☐

LED power supplies		# of Fixtures
 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the ' ' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.		Min current Max current
 300 48 500 ED1 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM1 Dimtype: 1-10V Cutout dimension (mm): 30	2	☐
 300 48 500 ED5 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5 Dimtype: DALI Cutout dimension (mm): 45	2	☐
 300 48 500 MDL LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W MDL Dimtype: non-dimmable Cutout dimension (mm): 30	2	☐
 300 48 500 WDL LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W WDL Dimtype: WDL = wireless dimmable Cutout dimension (mm): 45	2	☐
 300 90 61 LED POWER SUPPLY MULTI-POWER DIM6 Dimtype: mains (phase cut-off) or push button Cutout dimension (mm): 56	2	☐
 300 90 63 LED POWER SUPPLY MULTI-POWER DIM9 Dimtype: 1-10V or DALI or push button Cutout dimension (mm): 82	3(3)	☐
 300 90 64 LED POWER SUPPLY MULTI-POWER DIM7 Dimtype: 1-10V or push button Cutout dimension (mm): 72	2(1)	☐
 300 90 68 LED POWER SUPPLY MULTI-POWER DIM5 Dimtype: DALI Cutout dimension (mm): 72	2(1)	☐

DELTALIGHT

DEEP RINGO TRIMLESS SOFT 93045



19436 9030 BRCU

	300 90 69 LED POWER SUPPLY MULTI-POWER HV DIM9 Dimtype: 1-10V or DALI or push button Cutout dimension (mm): 84	5(3)	☐
	300 90 124 LED POWER SUPPLY MULTI-POWER DIM7 Dimtype: 1-10V or push button Cutout dimension (mm): 55	1(1)	☐
	300 90 125 LED POWER SUPPLY MULTI-POWER MINI DIM5 Dimtype: DALI Cutout dimension (mm): 55	1(1)	☐
	21012 0010 LED POWER SUPPLY MULTI POWER Dimtype: non-dimmable Cutout dimension (mm): 50	2	☐
	21012 0021 LED POWER SUPPLY MULTI POWER DIM1 Dimtype: 1-10V Cutout dimension (mm): 54	2	☐
	21012 0035 LED POWER SUPPLY MULTI POWER DIM5 Dimtype: DALI Cutout dimension (mm): 54	2	☐
	21012 004W LED POWER SUPPLY MULTI-POWER WDL Dimtype: WDL = wireless dimmable Cutout dimension (mm): 84	3(3)	☐
	21012 005W LED POWER SUPPLY MULTI-POWER COMPACT WDL Dimtype: WDL = wireless dimmable Cutout dimension (mm): 54	2	☐
	21012 0278 LED POWER SUPPLY MULTI POWER 500-700 / 20W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 55	1	☐
	21012 0288 LED POWER SUPPLY MULTI POWER 500-700 / 36W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 55	2->2	☐


DELTALIGHT

DEEP RINGO TRIMLESS SOFT 93045


19436 9030 BRCU

	21012 0298 LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8	1	☐
Dimtype: mains (phase cut-off)			
Cutout dimension (mm): 48			
	21032 0305 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5	2	☐
Dimtype: DALI			
Cutout dimension (mm): 30			


Mounting kits

	15212 2000 MOUNTING KIT R82 TRIMLESS O.F.A.	☐
Cutout dimension (mm): 105		

Mounting kits stretched ceiling

	15212 0070 MOUNTING KIT R82 TRIMLESS CSC	☐
	15212 0150 MOUNTING KIT R82 TRIMLESS WSC	☐

Mounting kits side air + light


	29810 0010 MOUNTING KIT SIDE AIR 101	☐
Cutout dimension (mm): 168		

DELTALIGHT

DEEP RINGO TRIMLESS SOFT 93045

19436 9030 BRCU

Mounting kits top air + light




29810 0210 MOUNTING KIT TOP AIR 101

Cutout dimension (mm): 135

☐

Mounting kits side air only




29810 0100 MOUNTING KIT SIDE AIR ONLY 1

Cutout dimension (mm): 168

☐

Mounting kits top air only




29810 0200 MOUNTING KIT TOP AIR ONLY 1

Cutout dimension (mm): 135

☐

Mounting kits no air



29810 0050 MOUNTING KIT NO AIR 101

Cutout dimension (mm): 168

☐

Notes: