




LUNELLE 52 ON 92730

32813 9220 BRA

AVAILABLE IN  
**BRUSHED ALU** 32813 9220 BRA  
**BRUSHED ANTHRACITE** 32813 9220 BRAT  
**BRUSHED BROWN BRONZE** 32813 9220 BRBB  
**BRUSHED COPPER** 32813 9220 BRCU  
**BRUSHED GOLD** 32813 9220 BRG  
**BRUSHED OLD BRONZE** 32813 9220 BROB

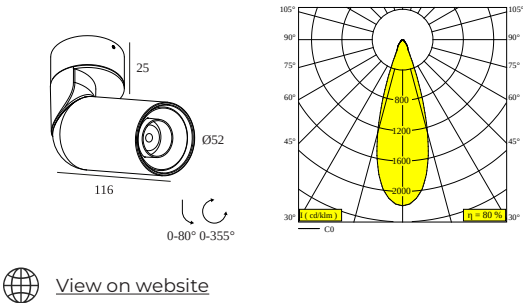

 [View on website](#)



|                             |                                            |
|-----------------------------|--------------------------------------------|
| General info                |                                            |
| LOCATION                    | indoor                                     |
| INSTALLATION                | Ceiling Surface mounted                    |
| INGRESS PROTECTION          | IP20                                       |
| WEIGHT (KG)                 | 0.3                                        |
| Electrical info             |                                            |
| CLASS                       | III                                        |
| DIM TYPE                    | depending on power supply                  |
| ENERGY CLASS                | G                                          |
| Lightsource info            |                                            |
| LIGHTSOURCE NAME            | LED                                        |
| LIGHTSOURCE                 | LED 5,6W / CRI>90 (R9: 80) / 2700K / 485lm |
| SDCM                        | SDCM3                                      |
| RISKGROUP                   | RG2                                        |
| BEAMANGLE                   | 30°                                        |
| LED TECHNICS (LIGHT SOURCE) | 485lm // 5,6W // 86lm/W                    |
| LED TECHNICS (LUMINAIRE)    | 388lm // 6,4W // 60lm/W                    |
| Requirements                |                                            |
| LED POWER SUPPLY 500mA-DC   |                                            |
| Accessories                 |                                            |
| VISOR 52                    |                                            |

For detailed installation instructions, please consult the manual : [32813\\_XXX0\\_HAND.pdf](#)

### FINISH YOUR SPECIFICATION


#### LED power supplies

#### # of Fixtures



# of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current




**300 90 63** LED POWER SUPPLY MULTI-POWER DIM9

1 -> 6 (6)

Dimtype: 1-10V or DALI or push button

Cutout dimension (mm): 82




**300 90 68** LED POWER SUPPLY MULTI-POWER DIM5

1 -> 4 (2)

Dimtype: DALI

Cutout dimension (mm): 72




**300 90 69** LED POWER SUPPLY MULTI-POWER HV DIM9

1 -> 10 (7)

Dimtype: 1-10V or DALI or push button

Cutout dimension (mm): 84




**300 90 124** LED POWER SUPPLY MULTI-POWER DIM7

1 -> 3 (2)

Dimtype: 1-10V or push button

Cutout dimension (mm): 55




**300 90 125** LED POWER SUPPLY MULTI-POWER MINI DIM5

1 -> 3 (2)

Dimtype: DALI

Cutout dimension (mm): 55




**21012 005W** LED POWER SUPPLY MULTI-POWER COMPACT WDL

1 -> 4

Dimtype: WDL = wireless dimmable

Cutout dimension (mm): 54




**21012 0298** LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8

1 -> 3

Dimtype: mains (phase cut-off)

Cutout dimension (mm): 48



**21012 0595** LED POWER SUPPLY 500mA-DC 10W DIM5


1 -> 1

Dimtype: DALI

Cutout dimension (mm): 35

### Light altering devices

---



**32810 0010 DC** VISOR 52 DC



Notes: