
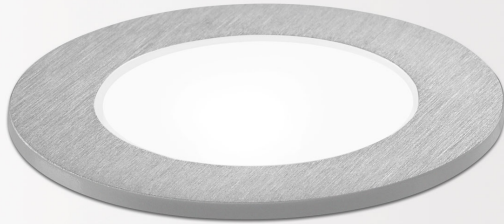



## LEDS C R ST 927

13611 9200 ANO

AVAILABLE IN  
**ALU ANODIZED** 13611 9200 ANO



 [View on website](#)



### General info

<b>LOCATION</b>	outdoor
<b>INSTALLATION</b>	Floor Recessed, Wall Recessed
<b>CUTOUT SHAPE/SIZE (MM)</b>	round - 41
<b>RECESSED DEPTH (MM)</b>	45
<b>INGRESS PROTECTION</b>	IP67
<b>PROTECTION AGAINST MECHANICAL IMPACT</b>	IK03
<b>WEIGHT (KG)</b>	0.1
<b>ADJUSTABILITY</b>	non adjustable
<b>INFORMATION</b>	EXCL.LED POWER SUPPLY 350mA-DC

### Electrical info

<b>CLASS</b>	III
<b>DIM TYPE</b>	depending on power supply
<b>ENERGY CLASS</b>	E

### Lightsource info

<b>LIGHTSOURCE NAME</b>	LED
<b>LIGHTSOURCE</b>	LED array 1W / CRI>90 (R9: 55) / 2700K / 120lm
<b>TM-30 VALUES</b>	rf: 91 / Rg: 100
<b>SDCM</b>	SDCM3
<b>RISKGROUP</b>	RG2
<b>LM80</b>	L90B10 > 150000
<b>LED TECHNICS (LIGHT SOURCE)</b>	120lm // 1W // 124lm/W
<b>LED TECHNICS (LUMINAIRE)</b>	35lm // 1,2W // 30lm/W

### Requirements

LED POWER SUPPLY 350mA-DC DIM

For detailed installation instructions, please consult the manual : [13611\\_XXX0\\_HAND.pdf](#)

### FINISH YOUR SPECIFICATION


#### LED power supplies

#### # of Fixtures



# of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current




**300 48 350 ED1** LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM1

3->14

Dimtype: 1-10V

Cutout dimension (mm): 30




**300 48 350 ED5** LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5

3->14

Dimtype: DALI

Cutout dimension (mm): 45




**300 48 350 MDL** LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W MDL

3->14

Dimtype: non-dimmable

Cutout dimension (mm): 30




**300 48 350 WDL** LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W WDL

3->14

Dimtype: WDL = wireless dimmable

Cutout dimension (mm): 45




**300 90 60** LED POWER SUPPLY MULTI-POWER DIM7

12 | 0 | 0

Dimtype: 1-10V or push button

Cutout dimension (mm): 70




**300 90 61** LED POWER SUPPLY MULTI-POWER DIM6

16

Dimtype: mains (phase cut-off) or push button

Cutout dimension (mm): 56




**300 90 63** LED POWER SUPPLY MULTI-POWER DIM9

26(25)

Dimtype: 1-10V or DALI or push button

Cutout dimension (mm): 82



**300 90 64** LED POWER SUPPLY MULTI-POWER DIM7

4->18(15)


Dimtype: 1-10V or push button

Cutout dimension (mm): 72

# DELTALIGHT

## LEDS C R ST 927

13611 9200 ANO




**300 90 67**

LED POWER CONVERTER 24V-DC TO MULTI CURRENT 48W DIM9

3->15

**Dimtype: 1-10V or DALI or push button**




**300 90 68**

LED POWER SUPPLY MULTI-POWER DIM5

2->17(15)

**Dimtype: DALI**

**Cutout dimension (mm): 72**




**300 90 69**

LED POWER SUPPLY MULTI-POWER HV DIM9

8->40(39)

**Dimtype: 1-10V or DALI or push button**

**Cutout dimension (mm): 84**




**300 90 91**

LED POWER SUPPLY 350mA-DC / 15W

14(10)

**Dimtype: non-dimmable**


**Cutout dimension (mm): 40**



**300 90 104**

LED POWER SUPPLY 350mA-DC / 6W

4




**300 90 112**

LED POWER SUPPLY 350mA-DC / 18W

15

**Dimtype: mains (phase cut-off)**




**300 90 124**

LED POWER SUPPLY MULTI-POWER DIM7

6->17(15)

**Dimtype: 1-10V or push button**

**Cutout dimension (mm): 55**




**300 90 125**

LED POWER SUPPLY MULTI-POWER MINI DIM5

4->17(15)

**Dimtype: DALI**

**Cutout dimension (mm): 55**




**300 90 135**

LED POWER SUPPLY MULTI-POWER HV

17->29

**Dimtype: non-dimmable**

**Cutout dimension (mm): 90**



**21012 0010**

LED POWER SUPPLY MULTI POWER

6->15


**Dimtype: non-dimmable**

**Cutout dimension (mm): 50**

# DELTALIGHT

## LEDS C R ST 927

13611 9200 ANO




**21012 0021** LED POWER SUPPLY MULTI POWER DIM1

4->19

**Dimtype: 1-10V**

**Cutout dimension (mm): 54**




**21012 0035** LED POWER SUPPLY MULTI POWER DIM5

4->19

**Dimtype: DALI**

**Cutout dimension (mm): 54**




**21012 004W** LED POWER SUPPLY MULTI-POWER WDL

25(25)

**Dimtype: WDL = wireless dimmable**

**Cutout dimension (mm): 84**




**21012 005W** LED POWER SUPPLY MULTI-POWER COMPACT WDL

4->19

**Dimtype: WDL = wireless dimmable**

**Cutout dimension (mm): 54**




**21012 0258** LED POWER SUPPLY MULTI POWER 200-350 / 10W DIM8

7->10

**Dimtype: mains (phase cut-off)**

**Cutout dimension (mm): 50**




**21012 0268** LED POWER SUPPLY MULTI POWER 200-350 / 15W DIM8

10->15

**Dimtype: mains (phase cut-off)**

**Cutout dimension (mm): 50**




**21012 0298** LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8

3->15

**Dimtype: mains (phase cut-off)**

**Cutout dimension (mm): 48**




**21012 0308** LED POWER SUPPLY 350mA / 7,35W DIM8

5->7

**Dimtype: mains (phase cut-off)**

**Cutout dimension (mm): 40**




**21012 0480** LED POWER SUPPLY 350mA-DC / 17W IP68

2->17(15)

**Dimtype: non-dimmable**

**Cutout dimension (mm): 60**



**21032 0295** LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5

3->14

**Dimtype: DALI**

**Cutout dimension (mm): 30**

# DELTALIGHT

## **LEDS C R ST 927**

13611 9200 ANO

Notes: