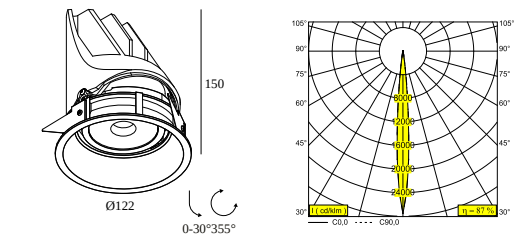




ENTERO RD-L 92710

28417 9210 B

AVAILABLE IN
NOIR 28417 9210 B
ENTIÈREMENT BLANC 28417 9210 FW
COULEUR OR 28417 9210 GC



 [View on website](#)



General info	
LOCATION	interieur
INSTALLATION	Plafond Encastré
CUTOUT SHAPE/SIZE (MM)	circulaire - 112
RECESSED DEPTH (MM)	160
THICKNESS OF MOUNTING SURFACE (MM)	max.16
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.735
ADJUSTABILITY	0° à 30° inclinable, 355° rotatif
INFORMATION	LENS SP-10° EXCL.LED POWER SUPPLY 350-900mA-DC

Electrical info	
CLASS	III
DIM TYPE	selon le type d'alimentation externe
ENERGY CLASS	G
CERTIFICATION	CB, ENEC, EPD

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 3,9-10,7W / CRI>90 (R9: 56) / 2700K / 385-814lm
RVALUES	rf: 91 / Rg: 99
SDMC	SDCM2
RISKGROUP	RG2 (threshold 0,6m)
LM80	L90B10 > 41000
BEAMANGLE	10°
LED TECHNICS (LIGHT SOURCE)	814lm // 10,7W // 76lm/W
LED TECHNICS (LUMINAIRE)	708lm // 12,3W // 58lm/W

Requirements	
LED POWER SUPPLY 350 / 500 / 700 / 900mA-DC DIM	

Options	
ENTERO RD-L MOUNTING SET S2	


Accessories	
ENTERO L HONEYCOMB	

For detailed installation instructions, please consult the manual : [28417_XXX0_HAND.pdf](#)

CEILING COMPATIBILITY







Ceiling Type	Mounting Kit
 System ceiling	-
 Plasterboard	-
 Stucanet	-
 Wood	-
 Concrete	 28500 0210 - ENTERO RD-L MOUNTING SET S2 Required
 Concrete + plaster	 28500 0210 - ENTERO RD-L MOUNTING SET S2 Required
 Lintel + plaster	 28500 0210 - ENTERO RD-L MOUNTING SET S2 Required
 Hollow-core slab	 28500 0210 - ENTERO RD-L MOUNTING SET S2 Required
 Hollow-core slab + plaster	 28500 0210 - ENTERO RD-L MOUNTING SET S2 Required
 Stretched ceiling	-

FINISH YOUR SPECIFICATION

les alimentations led	# of Fixtures
 web2print_power_supply_info_box	Min current Max current
 300 48 350 ED1 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM1 Dimtype: 1 à 10 V Cutout dimension (mm): 30	3











ENTERO RD-L 92710

28417 9210 B

	<u>300 48 350 ED5</u> LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5	3	☐
	Dimtype: DALI		
	Cutout dimension (mm): 45		
	<u>300 48 350 MDL</u> LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W MDL	3	☐
	Dimtype: non dimmable		
	Cutout dimension (mm): 30		
	<u>300 48 350 WDL</u> LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W WDL	3	☐
	Dimtype: WDL = dimmable sans fil		
	Cutout dimension (mm): 45		
	<u>300 48 500 ED1</u> LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM1	3	☐
	Dimtype: 1 à 10 V		
	Cutout dimension (mm): 30		
	<u>300 48 500 ED5</u> LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5	3	☐
	Dimtype: DALI		
	Cutout dimension (mm): 45		
	<u>300 48 500 MDL</u> LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W MDL	3	☐
	Dimtype: non dimmable		
	Cutout dimension (mm): 30		
	<u>300 48 500 WDL</u> LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W WDL	3	☐
	Dimtype: WDL = dimmable sans fil		
	Cutout dimension (mm): 45		
	<u>300 48 700 ED1</u> LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W DIM1	3	☐
	Dimtype: 1 à 10 V		
	Cutout dimension (mm): 30		
	<u>300 48 700 ED5</u> LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W DIM5	3	☐
	Dimtype: DALI		
	Cutout dimension (mm): 45		
	<u>300 48 700 MDL</u> LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W MDL	3	☐
	Dimtype: non dimmable		
	Cutout dimension (mm): 30		










ENTERO RD-L 92710

28417 9210 B

	300 48 700 WDL LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W WDL	3	☐
Dimtype: WDL = dimmable sans fil			
Cutout dimension (mm): 45			
	300 90 61 LED POWER SUPPLY MULTI-POWER DIM6	3 3 3	☐
Dimtype: fin de phase ou bouton poussoir			
Cutout dimension (mm): 56			
	300 90 63 LED POWER SUPPLY MULTI-POWER DIM9	6(6) 6(6) 6(4) 5(3)	☐
Dimtype: 1 à 10 V ou DALI ou bouton poussoir			
Cutout dimension (mm): 82			
	300 90 64 LED POWER SUPPLY MULTI-POWER DIM7	2->4(3) 4(2) 3(1) 1(1)	☐
Dimtype: 1 à 10 V ou bouton poussoir			
Cutout dimension (mm): 72			
	300 90 67 LED POWER CONVERTER 24V-DC TO MULTI CURRENT 48W DIM9	3 3	☐
Dimtype: 1 à 10 V ou DALI ou bouton poussoir			
	300 90 68 LED POWER SUPPLY MULTI-POWER DIM5	4(3) 4(2) 3(1) -	☐
Dimtype: DALI			
Cutout dimension (mm): 72			
	300 90 69 LED POWER SUPPLY MULTI-POWER HV DIM9	2->9(10) 9(6) 7(4) -	☐
Dimtype: 1 à 10 V ou DALI ou bouton poussoir			
Cutout dimension (mm): 84			
	300 90 110 LED POWER SUPPLY 350mA-DC / 10W DIM8	2->2	☐
Dimtype: fin de phase			
Cutout dimension (mm): 42			
	300 90 124 LED POWER SUPPLY MULTI-POWER DIM7	2->4(3) 3(2) 2(1) 1(1)	☐
Dimtype: 1 à 10 V ou bouton poussoir			
Cutout dimension (mm): 55			
	300 90 125 LED POWER SUPPLY MULTI-POWER MINI DIM5	4(3) 3(2) 2(1) -	☐
Dimtype: DALI			
Cutout dimension (mm): 55			

ENTERO RD-L 92710








28417 9210 B

	<u>300 90 135</u> LED POWER SUPPLY MULTI-POWER HV Dimtype: non dimmable Cutout dimension (mm): 90	5->7 4->7 4->6 3->6 3->6	☐
	<u>21012 0010</u> LED POWER SUPPLY MULTI POWER Dimtype: non dimmable Cutout dimension (mm): 50	2->3 3 3 -	☐
	<u>21012 0021</u> LED POWER SUPPLY MULTI POWER DIM1 Dimtype: 1 à 10 V Cutout dimension (mm): 54	4 4 4 -	☐
	<u>21012 0035</u> LED POWER SUPPLY MULTI POWER DIM5 Dimtype: DALI Cutout dimension (mm): 54	4 4 4 -	☐
	<u>21012 004W</u> LED POWER SUPPLY MULTI-POWER WDL Dimtype: WDL = dimmable sans fil Cutout dimension (mm): 84	6(6) 5(5) 5(4) 5(3)	☐
	<u>21012 005W</u> LED POWER SUPPLY MULTI-POWER COMPACT WDL Dimtype: WDL = dimmable sans fil Cutout dimension (mm): 54	4 4 4 3	☐
	<u>21012 0258</u> LED POWER SUPPLY MULTI POWER 200-350 / 10W DIM8 Dimtype: fin de phase Cutout dimension (mm): 50	2->2	☐
	<u>21012 0268</u> LED POWER SUPPLY MULTI POWER 200-350 / 15W DIM8 Dimtype: fin de phase Cutout dimension (mm): 50	3->3	☐
	<u>21012 0278</u> LED POWER SUPPLY MULTI POWER 500-700 / 20W DIM8 Dimtype: fin de phase Cutout dimension (mm): 55	2->2 2->2	☐
	<u>21012 0288</u> LED POWER SUPPLY MULTI POWER 500-700 / 36W DIM8 Dimtype: fin de phase Cutout dimension (mm): 55	3->4 3->4	☐


DELTALIGHT

ENTERO RD-L 92710

28417 9210 B

	21012 0298 LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8 Dimtype: fin de phase Cutout dimension (mm): 48	3 3 2 1 ☐
	21012 0480 LED POWER SUPPLY 350mA-DC / 17W IP68 Dimtype: non dimmable Cutout dimension (mm): 60	4(3) ☐
	21012 0490 LED POWER SUPPLY 700mA-DC / 30W IP68 Dimtype: non dimmable Cutout dimension (mm): 60	3(1) ☐
	21012 0500 LED POWER SUPPLY 500mA-DC / 24W IP68 Dimtype: non dimmable Cutout dimension (mm): 60	4(2) ☐
	21032 0295 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5 Dimtype: DALI Cutout dimension (mm): 30	3 ☐
	21032 0305 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5 Dimtype: DALI Cutout dimension (mm): 30	3 ☐
	21032 0315 LED POWER CONVERTER 48V-DC to 700 mA-DC / 25W DIM5 Dimtype: DALI Cutout dimension (mm): 30	3 ☐

modifier les dispositifs de lumière


	28500 0170 B ENTERO L HONEYCOMB SINGLE USE B	☐
--	---	--------------------------

DELTALIGHT

ENTERO RD-L 92710

28417 9210 B

Mounting set S2



28500 0210 ENTERO RD-L MOUNTING SET S2



Notes: