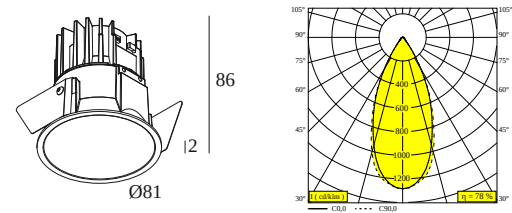




DEEP RINGO SOFT 93045

19437 9030 BRCU

- AVAILABLE IN
- BLACK 19437 9030 B
 - BRUSHED ALU 19437 9030 BRA
 - BRUSHED ANTHRACITE 19437 9030 BRAT
 - BRUSHED BROWN BRONZE 19437 9030 BRBB
 - BRUSHED COPPER 19437 9030 BRCU
 - BRUSHED GOLD 19437 9030 BRG
 - BRUSHED OLD BRONZE 19437 9030 BROB
 - CREAM 19437 9030 CR
 - FLEMISH BRONZE 19437 9030 FBR
 - FLEMISH GOLD 19437 9030 FG
 - GOLD COLOURED 19437 9030 GC
 - PIANO BLACK 19437 9030 PB
 - WHITE 19437 9030 W



[View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Ceiling Recessed
CUTOUT SHAPE/SIZE (MM)	round - 76
RECESSED DEPTH (MM)	90
THICKNESS OF MOUNTING SURFACE (MM)	min.5
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.2
ADJUSTABILITY	non adjustable
INFORMATION	REFLECTOR WFL-45° EXCL.DIMMABLE LED POWER SUPPLY 500mA-DC

Electrical info	
CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	F
CERTIFICATES	CB, ENEC, EPD, LCA

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 10,2W / CRI>90 (R9: 50) / 3000K-1800K / 1038lm
SDCM	SDCM2
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	45°
LED TECHNICS (LIGHT SOURCE)	1038lm // 10,2W // 109lm/W
LED TECHNICS (LUMINAIRE)	814lm // 11,7W // 69lm/W

Requirements	
LED POWER SUPPLY 500mA-DC DIM	

For detailed installation instructions, please consult the manual : [19437_XXX0_HAND.pdf](#)

CEILING COMPATIBILITY

Ceiling Type	Mounting Kit
 System ceiling	-
 Plasterboard	-
 Stucanet	-
 Wood	-
 Concrete	-
 Concrete + plaster	-
 Lintel + plaster	-
 Hollow-core slab	-
 Hollow-core slab + plaster	-
 Stretched ceiling	-









FINISH YOUR SPECIFICATION

Emergency units

	21032 0270 B EMERGENCY UNIT 7W / 1h + LED INDICATOR HOLDER B	☐
	21032 0270 W EMERGENCY UNIT 7W / 1h + LED INDICATOR HOLDER W	☐









DEEP RINGO SOFT 93045

19437 9030 BRCU

LED power supplies		# of Fixtures
 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the ' ' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.		Min current Max current
 300 48 500 ED1 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM1 Dimtype: 1-10V Cutout dimension (mm): 30	2	☐
 300 48 500 ED5 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5 Dimtype: DALI Cutout dimension (mm): 45	2	☐
 300 48 500 MDL LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W MDL Dimtype: non-dimmable Cutout dimension (mm): 30	2	☐
 300 48 500 WDL LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W WDL Dimtype: WDL = wireless dimmable Cutout dimension (mm): 45	2	☐
 300 90 61 LED POWER SUPPLY MULTI-POWER DIM6 Dimtype: mains (phase cut-off) or push button Cutout dimension (mm): 56	2	☐
 300 90 63 LED POWER SUPPLY MULTI-POWER DIM9 Dimtype: 1-10V or DALI or push button Cutout dimension (mm): 82	3(3)	☐
 300 90 64 LED POWER SUPPLY MULTI-POWER DIM7 Dimtype: 1-10V or push button Cutout dimension (mm): 72	2(1)	☐
 300 90 68 LED POWER SUPPLY MULTI-POWER DIM5 Dimtype: DALI Cutout dimension (mm): 72	2(1)	☐



DEEP RINGO SOFT 93045

19437 9030 BRCU

	300 90 69 LED POWER SUPPLY MULTI-POWER HV DIM9 Dimtype: 1-10V or DALI or push button Cutout dimension (mm): 84	5(3)	☐
	300 90 124 LED POWER SUPPLY MULTI-POWER DIM7 Dimtype: 1-10V or push button Cutout dimension (mm): 55	1(1)	☐
	300 90 125 LED POWER SUPPLY MULTI-POWER MINI DIM5 Dimtype: DALI Cutout dimension (mm): 55	1(1)	☐
	21012 0010 LED POWER SUPPLY MULTI POWER Dimtype: non-dimmable Cutout dimension (mm): 50	2	☐
	21012 0021 LED POWER SUPPLY MULTI POWER DIM1 Dimtype: 1-10V Cutout dimension (mm): 54	2	☐
	21012 0035 LED POWER SUPPLY MULTI POWER DIM5 Dimtype: DALI Cutout dimension (mm): 54	2	☐
	21012 004W LED POWER SUPPLY MULTI-POWER WDL Dimtype: WDL = wireless dimmable Cutout dimension (mm): 84	3(3)	☐
	21012 005W LED POWER SUPPLY MULTI-POWER COMPACT WDL Dimtype: WDL = wireless dimmable Cutout dimension (mm): 54	2	☐
	21012 0278 LED POWER SUPPLY MULTI POWER 500-700 / 20W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 55	1	☐
	21012 0288 LED POWER SUPPLY MULTI POWER 500-700 / 36W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 55	2->2	☐

DEEP RINGO SOFT 93045

19437 9030 BRCU

	21012 0298 LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 48	1	☐
	21032 0305 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5 Dimtype: DALI Cutout dimension (mm): 30	2	☐

Notes: