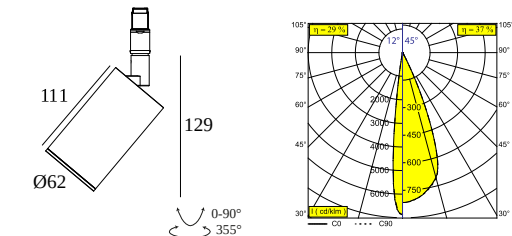




M26L - SPY FOCUS MP 927 DIM5

23233 9205 B

AVAILABLE IN
BLACK 23233 9205 B
FLEMISH BRONZE 23233 9205 FBR
FLEMISH GOLD 23233 9205 FG
WHITE 23233 9205 W



[View on website](#)



General info

LOCATION	indoor
INSTALLATION	Low voltage systems Low voltage system mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.5
ADJUSTABILITY	0° to 90° swiveling, 355° rotatable
INFORMATION	ADJUSTABLE BEAM 12°-45° INCL.CLIP 48V ADAPTER EXCL.LED POWER SUPPLY 48V-DC

Electrical info

ELECTRICAL	48V-DC
CLASS	III
DIM TYPE	DALI
ENERGY CLASS	E
CERTIFICATES	CB, EAC, ENEC, EPD

Lightsource info

LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 17,2W / CRI>90 (R9: 60) / 2700K / 2009lm
TM-30 VALUES	rf: 89 / Rg: 100
SDCM	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	12°-45°
LED TECHNICS (LIGHT SOURCE)	2009lm // 17,2W // 117lm/W
LED TECHNICS (LUMINAIRE)	703lm // 19,8W // 36lm/W

Remarks

Take a look at our **MAGNETIC PROFILES** movie

Requirements

LED POWER SUPPLY 48V-DC

For detailed installation instructions, please consult the manual : **23233_XXXX_HAND.pdf**

FINISH YOUR SPECIFICATION

LED power supplies

of Fixtures



of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current




300 89 48 90 LED POWER SUPPLY 48V-DC / 90W

4

Dimtype: non-dimmable


Cutout dimension (mm): 75



300 89 48 100 LED POWER SUPPLY 48V-DC / 100W DIN

4

Dimtype: non-dimmable



300 89 48 150 LED POWER SUPPLY 48V-DC / 150W

6

Dimtype: non-dimmable



300 89 48 240 LED POWER SUPPLY 48V-DC / 240W DIN

11

Dimtype: non-dimmable



21012 0230 LED POWER SUPPLY 48V-DC / 100W

5

Dimtype: non-dimmable

Cutout dimension (mm): 40



21012 0240 LED POWER SUPPLY 48V-DC / 200W

10

Dimtype: non-dimmable

Cutout dimension (mm): 40

Power box

of Fixtures





of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current





DELTALIGHT


M26L - SPY FOCUS MP 927 DIM5

23233 9205 B

	23377 0010 B SLM26L - POWERBOX 48V-DC / 96W B	5 ☐
Dimtype: non-dimmable		
	23377 0010 W SLM26L - POWERBOX 48V-DC / 96W W	5 ☐
	23377 0020 B SLM26L - MID POWERBOX 48V-DC / 96W B	5 ☐
Dimtype: non-dimmable		
	23377 0020 W SLM26L - MID POWERBOX 48V-DC / 96W W	5 ☐

COMPATIBLE COMPOSABLES




SHIFTLINE M26L profile (+ SHIFTLINE M26L MATRIX)	Available Colours
	23358 0000 SLM26L - PROFILE 
	23358 0010 SLM26L - PROFILE 1m 
	23358 0020 SLM26L - PROFILE 2m 
	23358 0030 SLM26L - PROFILE 3m 
SHIFTLINE M35R profile	Available Colours

	23375 0000 SLM35R - PROFILE 
---	--

DELTALIGHT

M26L - SPY FOCUS MP 927 DIM5

23233 9205 B

	23375 0010 SLM35R - PROFILE 1m	
	23375 0020 SLM35R - PROFILE 2m	
	23375 0030 SLM35R - PROFILE 3m	

Notes: