




BOXY R 92733

251 70 811 922 B-FBR

AVAILABLE IN
BLACK-BLACK 251 70 811 922 B-B
BLACK-FLEMISH BRONZE 251 70 811 922 B-FBR
BLACK-FLEMISH GOLD 251 70 811 922 B-FG
WHITE-BLACK 251 70 811 922 W-B
WHITE-WHITE 251 70 811 922 W-W

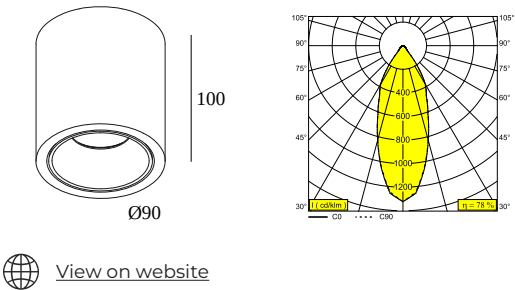

 [View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Ceiling Surface mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.6
ADJUSTABILITY	non adjustable
INFORMATION	REFLECTOR FL-33° INCLLED POWER SUPPLY 500mA-DC

Electrical info	
ELECTRICAL	110-240V / 50-60Hz
CLASS	I
POWER SUPPLY	YES
DIM TYPE	non-dimmable
ENERGY CLASS	D
CERTIFICATES	EAC, LCA, RCM

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 8,6W / CRI>90 (R9: 60) / 2700K / 1041lm
TM-30 VALUES	rf: 89 / Rg: 100
SDCM	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	33°
LED TECHNICS (LIGHT SOURCE)	1041lm // 8,6W // 121lm/W
LED TECHNICS (LUMINAIRE)	815lm // 9,9W // 82lm/W


Options	
COVERSET R 100	

Accessories	
BOXY HONEYCOMB	
BOXY SOFTENING LENS	
BOXY GLASS SBL	

For detailed installation instructions, please consult the manual : [251 70 811 XXX HAND.pdf](#)

FINISH YOUR SPECIFICATION

Coversets



204 00 100 ANO COVERSET R 100 ANO

☐

204 00 100 B COVERSET R 100 B

☐

204 00 100 W COVERSET R 100 W

☐

Light altering devices



251 70 03 01 B BOXY HONEYCOMB B

☐

251 70 03 01 W BOXY HONEYCOMB W

☐

251 70 03 04 B BOXY SOFTENING LENS B

☐

251 70 03 04 W BOXY SOFTENING LENS W

☐

251 70 03 05 B BOXY GLASS SBL B

☐

251 70 03 05 W BOXY GLASS SBL W

☐

DELTALIGHT

BOXY R 92733

251 70 811 922 B-FBR

Notes: