

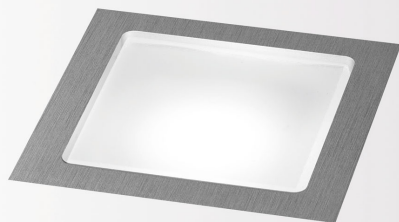


LEDS GO IN FORTE 927

13612 9200 ANO

AVAILABLE IN
ALU ANODIZED 13612 9200 ANO



[View on website](#)



General info

LOCATION	outdoor
INSTALLATION	Floor Recessed, Wall Recessed
CUTOUT SHAPE/SIZE (MM)	square - 38 x 38
RECESSED DEPTH (MM)	45
INGRESS PROTECTION	IP67
PROTECTION AGAINST MECHANICAL IMPACT	IK03
WEIGHT (KG)	0.1
ADJUSTABILITY	non adjustable
INFORMATION	EXCL.LED POWER SUPPLY 350mA-DC

Electrical info

CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	E

Lightsource info

LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 1W / CRI>90 (R9: 55) / 2700K / 120lm
TM-30 VALUES	rf: 91 / Rg: 100
SDCM	SDCM3
RISKGROUP	RG2
LM80	L90B10 > 150000
LED TECHNICS (LIGHT SOURCE)	120lm // 1W // 124lm/W
LED TECHNICS (LUMINAIRE)	36lm // 1,2W // 31lm/W

Requirements

LED POWER SUPPLY 350mA-DC DIM

Options

CONCRETE BOX 151
CONCRETE BOX TR 152

For detailed installation instructions, please consult the manual : [13612_XXX0_HAND.pdf](#)

FINISH YOUR SPECIFICATION


LED power supplies

of Fixtures



of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current




300 48 350 ED1 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM1

3->14

Dimtype: 1-10V

Cutout dimension (mm): 30




300 48 350 ED5 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5

3->14

Dimtype: DALI

Cutout dimension (mm): 45




300 48 350 MDL LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W MDL

3->14

Dimtype: non-dimmable

Cutout dimension (mm): 30




300 48 350 WDL LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W WDL

3->14

Dimtype: WDL = wireless dimmable

Cutout dimension (mm): 45




300 90 60 LED POWER SUPPLY MULTI-POWER DIM7

12 | 0 | 0

Dimtype: 1-10V or push button

Cutout dimension (mm): 70




300 90 61 LED POWER SUPPLY MULTI-POWER DIM6

16

Dimtype: mains (phase cut-off) or push button

Cutout dimension (mm): 56




300 90 63 LED POWER SUPPLY MULTI-POWER DIM9

26(25)

Dimtype: 1-10V or DALI or push button

Cutout dimension (mm): 82



300 90 64 LED POWER SUPPLY MULTI-POWER DIM7











4->18(15)

Dimtype: 1-10V or push button

Cutout dimension (mm): 72

LEDS GO IN FORTE 927






13612 9200 ANO

	300 90 67 LED POWER CONVERTER 24V-DC TO MULTI CURRENT 48W DIM9 Dimtype: 1-10V or DALI or push button	3->15	☐
	300 90 68 LED POWER SUPPLY MULTI-POWER DIM5 Dimtype: DALI Cutout dimension (mm): 72	2->17(15)	☐
	300 90 69 LED POWER SUPPLY MULTI-POWER HV DIM9 Dimtype: 1-10V or DALI or push button Cutout dimension (mm): 84	8->40(39)	☐
	300 90 91 LED POWER SUPPLY 350mA-DC / 15W Dimtype: non-dimmable Cutout dimension (mm): 40	14(10)	☐
	300 90 104 LED POWER SUPPLY 350mA-DC / 6W	4	☐
	300 90 112 LED POWER SUPPLY 350mA-DC / 18W Dimtype: mains (phase cut-off)	15	☐
	300 90 124 LED POWER SUPPLY MULTI-POWER DIM7 Dimtype: 1-10V or push button Cutout dimension (mm): 55	6->17(15)	☐
	300 90 125 LED POWER SUPPLY MULTI-POWER MINI DIM5 Dimtype: DALI Cutout dimension (mm): 55	4->17(15)	☐
	300 90 135 LED POWER SUPPLY MULTI-POWER HV Dimtype: non-dimmable Cutout dimension (mm): 90	17->29	☐
	21012 0010 LED POWER SUPPLY MULTI POWER Dimtype: non-dimmable Cutout dimension (mm): 50	6->15	☐

DELTALIGHT

LEDS GO IN FORTE 927

13612 9200 ANO


	<u>21012 0021</u> LED POWER SUPPLY MULTI POWER DIM1	4->19 ☐
Dimtype: 1-10V		
Cutout dimension (mm): 54		
	<u>21012 0035</u> LED POWER SUPPLY MULTI POWER DIM5	4->19 ☐
Dimtype: DALI		
Cutout dimension (mm): 54		
	<u>21012 004W</u> LED POWER SUPPLY MULTI-POWER WDL	25(25) ☐
Dimtype: WDL = wireless dimmable		
Cutout dimension (mm): 84		
	<u>21012 005W</u> LED POWER SUPPLY MULTI-POWER COMPACT WDL	4->19 ☐
Dimtype: WDL = wireless dimmable		
Cutout dimension (mm): 54		
	<u>21012 0258</u> LED POWER SUPPLY MULTI POWER 200-350 / 10W DIM8	7->10 ☐
Dimtype: mains (phase cut-off)		
Cutout dimension (mm): 50		
	<u>21012 0268</u> LED POWER SUPPLY MULTI POWER 200-350 / 15W DIM8	10->15 ☐
Dimtype: mains (phase cut-off)		
Cutout dimension (mm): 50		
	<u>21012 0298</u> LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8	3->15 ☐
Dimtype: mains (phase cut-off)		
Cutout dimension (mm): 48		
	<u>21012 0308</u> LED POWER SUPPLY 350mA / 7,35W DIM8	5->7 ☐
Dimtype: mains (phase cut-off)		
Cutout dimension (mm): 40		
	<u>21012 0480</u> LED POWER SUPPLY 350mA-DC / 17W IP68	2->17(15) ☐
Dimtype: non-dimmable		
Cutout dimension (mm): 60		
	<u>21032 0295</u> LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5	3->15 ☐
Dimtype: DALI		
Cutout dimension (mm): 30		

DELTALIGHT

LEDS GO IN FORTE 927

13612 9200 ANO


Concrete boxes



302 19 21 CONCRETE BOX 151



Cutout dimension (mm): 43 x 43



302 19 22 CONCRETE BOX TR 152



Cutout dimension (mm): 43 x 43

Notes: