

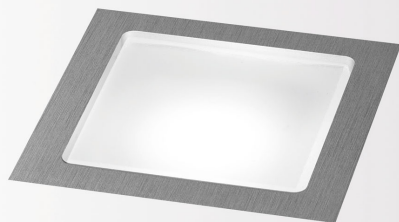


LEDS GO IN FORTE 930

13612 9300 ANO

AVAILABLE IN
ALU ANODIZED 13612 9300 ANO



[View on website](#)



General info

LOCATION	outdoor
INSTALLATION	Floor Recessed, Wall Recessed
CUTOUT SHAPE/SIZE (MM)	square - 38 x 38
RECESSED DEPTH (MM)	45
INGRESS PROTECTION	IP67
PROTECTION AGAINST MECHANICAL IMPACT	IK03
WEIGHT (KG)	0.1
ADJUSTABILITY	non adjustable
INFORMATION	EXCL.LED POWER SUPPLY 350mA-DC

Electrical info

CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	E

Lightsource info

LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 1W / CRI>90 (R9: 60) / 3000K / 131lm
TM-30 VALUES	rf: 92 / Rg: 99
SDCM	SDCM3
RISKGROUP	RG2
LM80	L90B10 > 150000
LED TECHNICS (LIGHT SOURCE)	131lm // 1W // 135lm/W
LED TECHNICS (LUMINAIRE)	39lm // 1,2W // 34lm/W

Requirements

LED POWER SUPPLY 350mA-DC DIM

Options

CONCRETE BOX 151
CONCRETE BOX TR 152

For detailed installation instructions, please consult the manual : [13612_XXX0_HAND.pdf](#)

LEDS GO IN FORTE 930

13612 9300 ANO

FINISH YOUR SPECIFICATION


LED power supplies

of Fixtures



of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current



300 48 350 ED1 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM1

3->14

Dimtype: 1-10V

Cutout dimension (mm): 30



300 48 350 ED5 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5

3->14

Dimtype: DALI

Cutout dimension (mm): 45



300 48 350 MDL LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W MDL

3->14

Dimtype: non-dimmable

Cutout dimension (mm): 30




300 48 350 WDL LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W WDL

3->14

Dimtype: WDL = wireless dimmable

Cutout dimension (mm): 45




300 90 60 LED POWER SUPPLY MULTI-POWER DIM7

12 | 0 | 0

Dimtype: 1-10V or push button

Cutout dimension (mm): 70




300 90 61 LED POWER SUPPLY MULTI-POWER DIM6

16

Dimtype: mains (phase cut-off) or push button

Cutout dimension (mm): 56




300 90 63 LED POWER SUPPLY MULTI-POWER DIM9

26(25)

Dimtype: 1-10V or DALI or push button

Cutout dimension (mm): 82



300 90 64 LED POWER SUPPLY MULTI-POWER DIM7











4->18(15)

Dimtype: 1-10V or push button

Cutout dimension (mm): 72







LEDS GO IN FORTE 930

13612 9300 ANO


	300 90 67	LED POWER CONVERTER 24V-DC TO MULTI CURRENT 48W DIM9	3->15	☐
Dimtype: 1-10V or DALI or push button				
	300 90 68	LED POWER SUPPLY MULTI-POWER DIM5	2->17(15)	☐
Dimtype: DALI				
Cutout dimension (mm): 72				
	300 90 69	LED POWER SUPPLY MULTI-POWER HV DIM9	8->40(39)	☐
Dimtype: 1-10V or DALI or push button				
Cutout dimension (mm): 84				
	300 90 91	LED POWER SUPPLY 350mA-DC / 15W	14(10)	☐
Dimtype: non-dimmable				
Cutout dimension (mm): 40				
	300 90 104	LED POWER SUPPLY 350mA-DC / 6W	4	☐
	300 90 112	LED POWER SUPPLY 350mA-DC / 18W	15	☐
Dimtype: mains (phase cut-off)				
	300 90 124	LED POWER SUPPLY MULTI-POWER DIM7	6->17(15)	☐
Dimtype: 1-10V or push button				
Cutout dimension (mm): 55				
	300 90 125	LED POWER SUPPLY MULTI-POWER MINI DIM5	4->17(15)	☐
Dimtype: DALI				
Cutout dimension (mm): 55				
	300 90 135	LED POWER SUPPLY MULTI-POWER HV	17->29	☐
Dimtype: non-dimmable				
Cutout dimension (mm): 90				
	21012 0010	LED POWER SUPPLY MULTI POWER	6->15	☐
Dimtype: non-dimmable				
Cutout dimension (mm): 50				

LEDS GO IN FORTE 930

13612 9300 ANO

	21012 0021 LED POWER SUPPLY MULTI POWER DIM1 Dimtype: 1-10V Cutout dimension (mm): 54	4->19 ☐
	21012 0035 LED POWER SUPPLY MULTI POWER DIM5 Dimtype: DALI Cutout dimension (mm): 54	4->19 ☐
	21012 004W LED POWER SUPPLY MULTI-POWER WDL Dimtype: WDL = wireless dimmable Cutout dimension (mm): 84	25(25) ☐
	21012 005W LED POWER SUPPLY MULTI-POWER COMPACT WDL Dimtype: WDL = wireless dimmable Cutout dimension (mm): 54	4->19 ☐
	21012 0258 LED POWER SUPPLY MULTI POWER 200-350 / 10W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 50	7->10 ☐
	21012 0268 LED POWER SUPPLY MULTI POWER 200-350 / 15W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 50	10->15 ☐
	21012 0298 LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 48	3->15 ☐
	21012 0308 LED POWER SUPPLY 350mA / 7,35W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 40	5->7 ☐
	21012 0480 LED POWER SUPPLY 350mA-DC / 17W IP68 Dimtype: non-dimmable Cutout dimension (mm): 60	2->17(15) ☐
	21032 0295 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5 Dimtype: DALI Cutout dimension (mm): 30	3->15 ☐


Concrete boxes



302 19 21 CONCRETE BOX 151



Cutout dimension (mm): 43 x 43



302 19 22 CONCRETE BOX TR 152



Cutout dimension (mm): 43 x 43

Notes: