


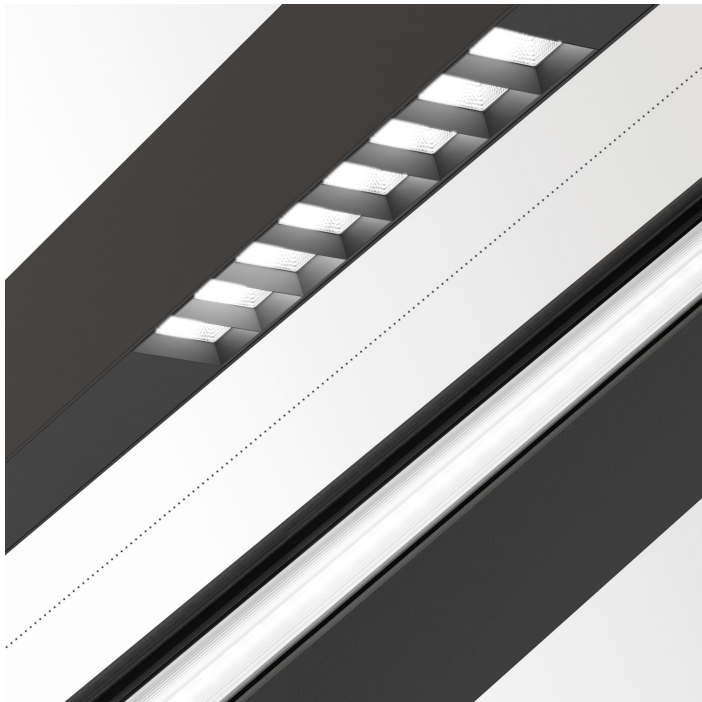

OML50 - INFORM DU HE 1640mm  
8+8LED 93063 DIM5

31442 9335 B

AVAILABLE IN  
BLACK 31442 9335 B

 [View on website](#)



| General info                |                                                                                                                         |
|-----------------------------|-------------------------------------------------------------------------------------------------------------------------|
| LOCATION                    | indoor                                                                                                                  |
| INGRESS PROTECTION          | IP20                                                                                                                    |
| WEIGHT (KG)                 | 1.6                                                                                                                     |
| INFORMATION                 | CLUSTER DOWN: 1545lm/m<br>CLUSTER UP: 1932lm/m<br>INCL.DIMMABLE LED POWER SUPPLY (DALI-2 standard)<br>CABLING 1 CIRCUIT |
| Electrical info             |                                                                                                                         |
| ELECTRICAL                  | 220-240V / 0 50-60Hz                                                                                                    |
| CLASS                       | I                                                                                                                       |
| POWER SUPPLY                | YES                                                                                                                     |
| DIM TYPE                    | DALI                                                                                                                    |
| ENERGY CLASS                | D                                                                                                                       |
| CERTIFICATES                | EPD, RCM                                                                                                                |
| Lightsource info            |                                                                                                                         |
| LIGHTSOURCE NAME            | LED                                                                                                                     |
| LIGHTSOURCE                 | DOWN: LED cluster 16,3W / CRI>90 (R9: 50) / 3000K / 2534lm<br>UP: LED cluster 20,4W / CRI>90 (R9: 50) / 3000K / 3168lm  |
| TM-30 VALUES                | Rf: 92 / Rg: 100                                                                                                        |
| SDCM                        | SDCM3                                                                                                                   |
| RISKGROUP                   | RG1                                                                                                                     |
| LM80                        | L80 > 60000                                                                                                             |
| BEAMANGLE                   | 63°                                                                                                                     |
| LED TECHNICS (LIGHT SOURCE) | DOWN: 2534lm // 16,3W // 155lm/W<br>UP: 3168lm // 20,4W // 155lm/W                                                      |

| Options               |
|-----------------------|
| WIRELESS CONTROL DIM5 |

Notes: