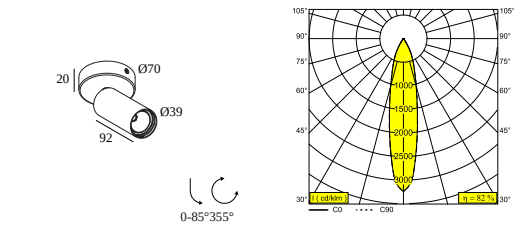




SPY 39 ON 92720

24127 9220 BROB

- AVAILABLE IN
- BLACK 24127 9220 B
 - BRUSHED ALU 24127 9220 BRA
 - BRUSHED ANTHRACITE 24127 9220 BRAT
 - BRUSHED COPPER 24127 9220 BRCU
 - BRUSHED GOLD 24127 9220 BRG
 - BRUSHED OLD BRONZE 24127 9220 BROB
 - FLEMISH BRONZE 24127 9220 FBR
 - FLEMISH GOLD 24127 9220 FG
 - FULL WHITE 24127 9220 FW
 - GOLD COLOURED 24127 9220 GC
 - PIANO BLACK 24127 9220 PB
 - WHITE 24127 9220 W



[View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Ceiling Surface mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.4
ADJUSTABILITY	0° to 85° swiveling, 355° rotatable
INFORMATION	REFLECTOR FL-20° EXCL LED POWER SUPPLY 350-500mA-DC
Electrical info	
CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	E
CERTIFICATES	CB, ENEC, LCA
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 5,8-8,6W / CRI>90 (R9: 60) / 2700K / 753-1041lm
TM-30 VALUES	rf: 89 / Rg: 100
SDCM	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	20°
LED TECHNICS (LIGHT SOURCE)	1041lm // 8,6W // 121lm/W
LED TECHNICS (LUMINAIRE)	849lm // 9,9W // 86lm/W

Requirements
SPY 39 TUBE or VISOR 39
LED POWER SUPPLY 350 / 500mA-DC DIM

Options
COVERSET R 90-100

For detailed installation instructions, please consult the manual : [24127_XXX0_HAND.pdf](#)

FINISH YOUR SPECIFICATION

LED power supplies

of Fixtures



of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current



300 48 350 ED1 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM1

2

Dimtype: 1-10V

Cutout dimension (mm): 30



300 48 350 ED5 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5

2

Dimtype: DALI

Cutout dimension (mm): 45



300 48 350 MDL LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W MDL

2

Dimtype: non-dimmable

Cutout dimension (mm): 30



300 48 350 WDL LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W WDL

2

Dimtype: WDL = wireless dimmable

Cutout dimension (mm): 45



300 48 500 ED1 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM1

2

Dimtype: 1-10V

Cutout dimension (mm): 30



300 48 500 ED5 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5

2

Dimtype: DALI

Cutout dimension (mm): 45



300 48 500 MDL LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W MDL

2

Dimtype: non-dimmable

Cutout dimension (mm): 30

SPY 39 ON 92720

24127 9220 BROB

	300 48 500 WDL LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W WDL Dimtype: WDL = wireless dimmable Cutout dimension (mm): 45	2	☐
	300 90 61 LED POWER SUPPLY MULTI-POWER DIM6 Dimtype: mains (phase cut-off) or push button Cutout dimension (mm): 56	2 2	☐
	300 90 63 LED POWER SUPPLY MULTI-POWER DIM9 Dimtype: 1-10V or DALI or push button Cutout dimension (mm): 82	4(4) 4(4)	☐
	300 90 64 LED POWER SUPPLY MULTI-POWER DIM7 Dimtype: 1-10V or push button Cutout dimension (mm): 72	2(2) 2(1)	☐
	300 90 67 LED POWER CONVERTER 24V-DC TO MULTI CURRENT 48W DIM9 Dimtype: 1-10V or DALI or push button	2 -	☐
	300 90 68 LED POWER SUPPLY MULTI-POWER DIM5 Dimtype: DALI Cutout dimension (mm): 72	2(2) 2(1)	☐
	300 90 69 LED POWER SUPPLY MULTI-POWER HV DIM9 Dimtype: 1-10V or DALI or push button Cutout dimension (mm): 84	2->6(6) 6(4)	☐
	300 90 124 LED POWER SUPPLY MULTI-POWER DIM7 Dimtype: 1-10V or push button Cutout dimension (mm): 55	3(2) 2(1)	☐
	300 90 125 LED POWER SUPPLY MULTI-POWER MINI DIM5 Dimtype: DALI Cutout dimension (mm): 55	2(2) 2(1)	☐
	300 90 135 LED POWER SUPPLY MULTI-POWER HV Dimtype: non-dimmable Cutout dimension (mm): 90	3->4 2->4	☐

DELTA LIGHT

SPY 39 ON 92720


24127 9220 BROB

	21012 0010 LED POWER SUPPLY MULTI POWER Dimtype: non-dimmable Cutout dimension (mm): 50	2 2	☐
	21012 0021 LED POWER SUPPLY MULTI POWER DIM1 Dimtype: 1-10V Cutout dimension (mm): 54	3 3	☐
	21012 0035 LED POWER SUPPLY MULTI POWER DIM5 Dimtype: DALI Cutout dimension (mm): 54	3 3	☐
	21012 004W LED POWER SUPPLY MULTI-POWER WDL Dimtype: WDL = wireless dimmable Cutout dimension (mm): 84	4(4) 3(3)	☐
	21012 005W LED POWER SUPPLY MULTI-POWER COMPACT WDL Dimtype: WDL = wireless dimmable Cutout dimension (mm): 54	3 3	☐
	21012 0268 LED POWER SUPPLY MULTI POWER 200-350 / 15W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 50	2->2 0	☐
	21012 0278 LED POWER SUPPLY MULTI POWER 500-700 / 20W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 55	1	☐
	21012 0288 LED POWER SUPPLY MULTI POWER 500-700 / 36W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 55	2->3	☐
	21012 0298 LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 48	2 2	☐
	21012 0308 LED POWER SUPPLY 350mA / 7,35W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 40	1	☐



DELTALIGHT

SPY 39 ON 92720

24127 9220 BROB

	21012 0318 LED POWER SUPPLY 500mA / 10W DIM8	1	☐
	Dimtype: mains (phase cut-off)		
	Cutout dimension (mm): 40		
	21012 0480 LED POWER SUPPLY 350mA-DC / 17W IP68	2(2)	☐
	Dimtype: non-dimmable		
	Cutout dimension (mm): 60		
	21012 0500 LED POWER SUPPLY 500mA-DC / 24W IP68	2(1)	☐
	Dimtype: non-dimmable		
	Cutout dimension (mm): 60		
	21032 0295 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5	2	☐
	Dimtype: DALI		
	Cutout dimension (mm): 30		
	21032 0305 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5	2	☐
	Dimtype: DALI		
	Cutout dimension (mm): 30		

Coversets

	204 00 90 ANO COVERSET R 90 ANO	☐
	204 00 90 B COVERSET R 90 B	☐
	204 00 90 W COVERSET R 90 W	☐
	204 00 100 ANO COVERSET R 100 ANO	☐
	204 00 100 B COVERSET R 100 B	☐
	204 00 100 W COVERSET R 100 W	☐

DELTALIGHT

SPY 39 ON 92720

24127 9220 BROB

Light altering devices



24144 0030 B VISOR 39 B

☐

Finish your product



24144 0010 B SPY 39 TUBE B

☐

24144 0010 FBR SPY 39 TUBE FBR

☐

24144 0010 FG SPY 39 TUBE FG

☐

24144 0010 GC SPY 39 TUBE GC

☐

24144 0010 W SPY 39 TUBE W

☐

24144 0070 SPY 39 TUBE SBL

☐

Notes: