DELTALIGHT

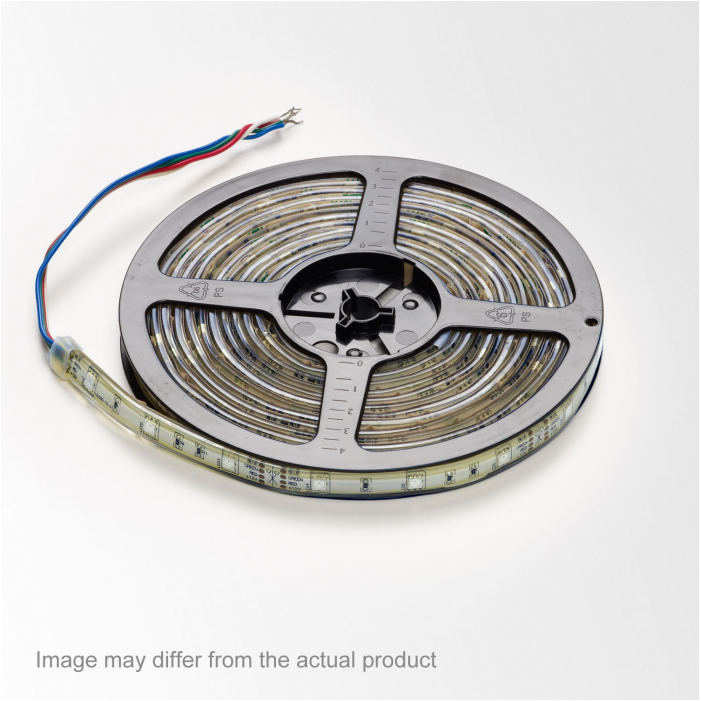

Image may differ from the actual product

LEDFLEX OUT RGB

REFERENCE 21044 0040



View on website

General info	
LOCATION	indoor-outdoor
INGRESS PROTECTION	IP65
WEIGHT (KG)	0.1
INFORMATION	MAX.L / FLEX : 5m 120 SMD LED/m DIVIDABLE PER 25mm 24V-DC

Electrical info	
CLASS	III
ENERGY CLASS	G

Requirements

LED POWER SUPPLY 24V-DC

Options

RGB DRIVER

Notes: