



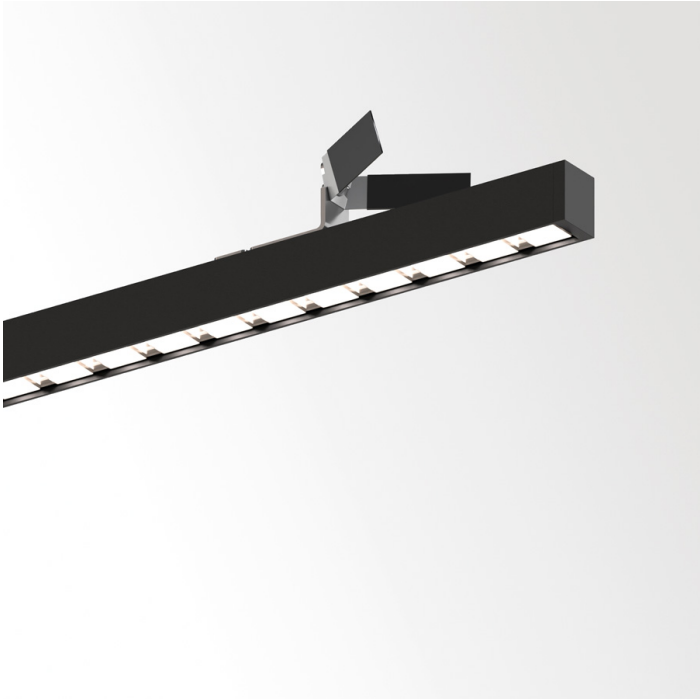

D-LINER 19 INF LOC1 286 94058 RD

32011 9420 B

AVAILABLE IN
BLACK 32011 9420 B



[View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Ceiling Recessed
INGRESS PROTECTION	IP20
WEIGHT (KG)	0
ADJUSTABILITY	non adjustable
INFORMATION	12 x REFLECTOR 58° EXCL.LED POWER SUPPLY 150mA-DC INCL.1 x CABLE 2 x 0,75mm ² - 0,5m + WIELAND PLUG GST08i2 male green

Electrical info	
CLASS	III
ENERGY CLASS	C
CERTIFICATES	EPD

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED cluster 5W / CRI>90 / 4000K / 904lm
BEAMANGLE	58°
LED TECHNICS (LIGHT SOURCE)	904lm // 5W // 180lm/W
LED TECHNICS (LUMINAIRE)	769lm // 5,8W // 134lm/W

Requirements	
LED POWER SUPPLY SET LOC PARALLEL	

Options	
CONNECTING CABLE LOC PARALLEL	

For detailed installation instructions, please consult the manual : [32011_XXX0_HAND.pdf](#)

D-LINER 19 INF LOC1 286 94058 RD


32011 9420 B

CEILING COMPATIBILITY

Ceiling Type	Mounting Kit
 Acoustic climate-control ceiling Interlu SAPP	-
 Acoustic climate-control ceiling Hunter Douglas 30BD	-

FINISH YOUR SPECIFICATION

Emergency units	# of Fixtures
 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the ' ' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.	Min current Max current

	32010 0195 EMERGENCY UNIT 1h LOC PARALLEL DIM5	1
Dimtype: DALI		

Current supply

	32010 1200 T CONNECTOR LOC PARALLEL	
	32010 1310 CONNECTING CABLE LOC PARALLEL 1m	
	32010 1320 CONNECTING CABLE LOC PARALLEL 2m	
	32010 1330 CONNECTING CABLE LOC PARALLEL 3m	

DELTALIGHT

D-LINER 19 INF LOC1 286 94058 RD

32011 9420 B



32010 1340 CONNECTING CABLE LOC PARALLEL 4m

☐

32010 1350 CONNECTING CABLE LOC PARALLEL 5m

☐


LED power supplies

of Fixtures



of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current



32010 0075 LED POWER SUPPLY SET LOC PARALLEL 150mA / 35W DIM5

1

☐

Dimtype: DALI

Notes: