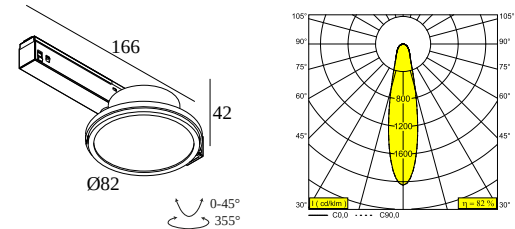




M26L - HALOSCAN HP SOFT 93021
DIM5

23132 9025 W

AVAILABLE IN
BLACK 23132 9025 B
WHITE 23132 9025 W



 [View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Low voltage systems Low voltage system mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.3
ADJUSTABILITY	0° to 45° swiveling, 355° rotatable
INFORMATION	LENS FL-21° EXCL.LED POWER SUPPLY 48V-DC

Electrical info	
ELECTRICAL	48V-DC
CLASS	III
DIM TYPE	DALI
ENERGY CLASS	E
CERTIFICATES	CB, ENEC

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 11,8W / CRI>90 (R9: 50) / 3000K-1800K / 1307lm
TM-30 VALUES	rf: 90 / Rg: 99
SDCM	SDCM2
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	21°
LED TECHNICS (LIGHT SOURCE)	1307lm // 11,8W // 110lm/W
LED TECHNICS (LUMINAIRE)	1071lm // 13,6W // 79lm/W

Remarks
Take a look at our MAGNETIC PROFILES movie

Requirements
LED POWER SUPPLY 48V-DC

Accessories
HALOSCAN HONEYCOMB
HALOSCAN LINEAR SPREAD LENS

M26L - HALOSCAN HP SOFT 93021 DIM5

23132 9025 W

For detailed installation instructions, please consult the manual : [23132_XXX5_HAND.pdf](#)

FINISH YOUR SPECIFICATION





LED power supplies		# of Fixtures
		Min current Max current
# of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the ' ' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.		
5510090 3008948100 LED POWER SUPPLY 48V-DC / 100W DIN Dimtype: non-dimmable 7		
63114125 3008948240 LED POWER SUPPLY 48V-DC / 240W DIN Dimtype: non-dimmable 17		
17129830 210120230 LED POWER SUPPLY 48V-DC / 100W Dimtype: non-dimmable Cutout dimension (mm): 40 7		
22139230 210120240 LED POWER SUPPLY 48V-DC / 200W Dimtype: non-dimmable Cutout dimension (mm): 40 14		
Light altering devices		
072 231100040 HALOSCAN LINEAR SPREAD LENS		
072 231100050B HALOSCAN HONEYCOMB B		

DELTALIGHT

M26L - HALOSCAN HP SOFT 93021 DIM5

23132 9025 W

COMPATIBLE COMPOSABLES

SHIFTLINE M26L profile (+ SHIFTLINE M26L MATRIX)		Available Colours
	23358 0000 SLM26L - PROFILE	
	23358 0010 SLM26L - PROFILE 1m	
	23358 0020 SLM26L - PROFILE 2m	
	23358 0030 SLM26L - PROFILE 3m	
SHIFTLINE M35R profile		Available Colours
	23375 0000 SLM35R - PROFILE	
	23375 0010 SLM35R - PROFILE 1m	
	23375 0020 SLM35R - PROFILE 2m	
	23375 0030 SLM35R - PROFILE 3m	

Notes:

DELTALIGHT

M26L - HALOSCAN HP SOFT 93021 DIM5

23132 9025 W