



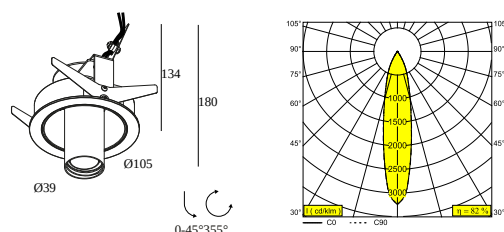
SPY 39 ST SOFT 93020

REFERENCE

24182 9020 W-W

AVAILABLE IN

WHITE-WHITE 24182 9020 W-W



[View on website](#)



General info

LOCATION	indoor
INSTALLATION	Ceiling Recessed
CUTOUT SHAPE/SIZE (MM)	round - 98
RECESSED DEPTH (MM)	80
THICKNESS OF MOUNTING SURFACE (MM)	max.25
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.5
ADJUSTABILITY	0° to 45° swiveling, 355° rotatable
INFORMATION	REFLECTOR FL-20° EXCL.DIMMABLE LED POWER SUPPLY 350mA-DC

Electrical info

CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	F
CERTIFICATES	CB, ENEC

Lightsource info

LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 6W / CRI>90 (R9: 50) / 3000K-1800K / 623lm
TM-30 VALUES	Rf: 90 / Rg: 99
SDCM	SDCM2
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	20°
LED TECHNICS (LIGHT SOURCE)	623lm // 6W // 105lm/W
LED TECHNICS (LUMINAIRE)	508lm // 6,9W // 74lm/W

Requirements

SPY 39 TUBE
LED POWER SUPPLY 350mA-DC DIM

For detailed installation instructions, please consult the manual : [24182_XXX0_HAND.pdf](#)

DELTALIGHT

SPY 39 ST SOFT 93020


24182 9020 W-W

CEILING COMPATIBILITY

Ceiling Type	Mounting Kit
 System ceiling	-
 Plasterboard	-
 Wood	-
 Stretched ceiling	-




FINISH YOUR SPECIFICATION

Emergency units

	21032 0270 B EMERGENCY UNIT 7W / 1h + LED INDICATOR HOLDER B	☐
	21032 0270 W EMERGENCY UNIT 7W / 1h + LED INDICATOR HOLDER W	☐

LED power supplies











of Fixtures

 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the ' ' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.		Min current Max current
	300 48 350 ED1 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM1	2 ☐
	Dimtype: 1-10V	
	Cutout dimension (mm): 30	
	300 48 350 ED5 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5	2 ☐
	Dimtype: DALI	
	Cutout dimension (mm): 45	
	300 48 350 MDL LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W MDL	2 ☐
	Dimtype: non-dimmable	
	Cutout dimension (mm): 30	

DELTALIGHT

SPY 39 ST SOFT 93020








24182 9020 W-W

	300 48 350 WDL LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W WDL Dimtype: WDL = wireless dimmable Cutout dimension (mm): 45	2	☐
	300 90 61 LED POWER SUPPLY MULTI-POWER DIM6 Dimtype: mains (phase cut-off) or push button Cutout dimension (mm): 56	2	☐
	300 90 63 LED POWER SUPPLY MULTI-POWER DIM9 Dimtype: 1-10V or DALI or push button Cutout dimension (mm): 82	4(4)	☐
	300 90 64 LED POWER SUPPLY MULTI-POWER DIM7 Dimtype: 1-10V or push button Cutout dimension (mm): 72	3(2)	☐
	300 90 67 LED POWER CONVERTER 24V-DC TO MULTI CURRENT 48W DIM9 Dimtype: 1-10V or DALI or push button	2	☐
	300 90 68 LED POWER SUPPLY MULTI-POWER DIM5 Dimtype: DALI Cutout dimension (mm): 72	2(2)	☐
	300 90 69 LED POWER SUPPLY MULTI-POWER HV DIM9 Dimtype: 1-10V or DALI or push button Cutout dimension (mm): 84	2->6(6)	☐
	300 90 124 LED POWER SUPPLY MULTI-POWER DIM7 Dimtype: 1-10V or push button Cutout dimension (mm): 55	2(2)	☐
	300 90 125 LED POWER SUPPLY MULTI-POWER MINI DIM5 Dimtype: DALI Cutout dimension (mm): 55	2(2)	☐
	21012 0021 LED POWER SUPPLY MULTI POWER DIM1 Dimtype: 1-10V Cutout dimension (mm): 54	3	☐


DELTALIGHT

SPY 39 ST SOFT 93020

24182 9020 W-W

	21012 0035 LED POWER SUPPLY MULTI POWER DIM5	3	☐
Dimtype: DALI			
Cutout dimension (mm): 54			
	21012 004W LED POWER SUPPLY MULTI-POWER WDL	4(4)	☐
Dimtype: WDL = wireless dimmable			
Cutout dimension (mm): 84			
	21012 005W LED POWER SUPPLY MULTI-POWER COMPACT WDL	3	☐
Dimtype: WDL = wireless dimmable			
Cutout dimension (mm): 54			
	21012 0268 LED POWER SUPPLY MULTI POWER 200-350 / 15W DIM8	2->2	☐
Dimtype: mains (phase cut-off)			
Cutout dimension (mm): 50			
	21012 0298 LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8	2	☐
Dimtype: mains (phase cut-off)			
Cutout dimension (mm): 48			
	21012 0308 LED POWER SUPPLY 350mA / 7,35W DIM8	1	☐
Dimtype: mains (phase cut-off)			
Cutout dimension (mm): 40			
	21032 0295 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5	2	☐
Dimtype: DALI			
Cutout dimension (mm): 30			

Finish your product

	24144 0010 B SPY 39 TUBE B	☐
	24144 0010 FBR SPY 39 TUBE FBR	☐
	24144 0010 FG SPY 39 TUBE FG	☐

DELTALIGHT

SPY 39 ST SOFT 93020

24182 9020 W-W

<u>24144 0010 GC</u>	SPY 39 TUBE GC	☐
<u>24144 0010 W</u>	SPY 39 TUBE W	☐
	<u>24144 0070</u> SPY 39 TUBE SBL	☐

Notes: