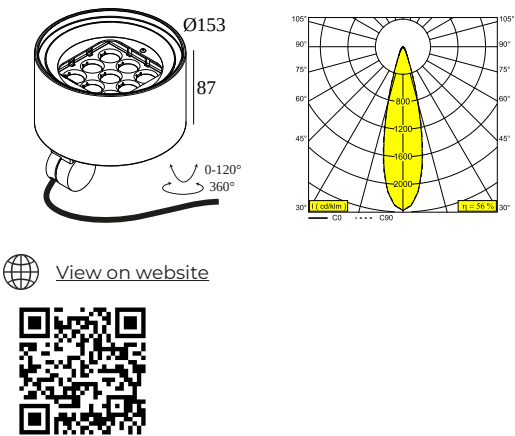




FRAX MB 93026 HONEYCOMB
DIM5

REFERENCE 26010 9375 PGR

AVAILABLE IN
FLEMISH BRONZE OUTDOOR 26010 9375 FBRX
ANTHRACITE 26010 9375 N
PINE GREEN 26010 9375 PGR



 [View on website](#)



General info	
LOCATION	outdoor
INSTALLATION	Floor Surface mounted,Wall Surface mounted
INGRESS PROTECTION	IP65
PROTECTION AGAINST MECHANICAL IMPACT	IK08
WEIGHT (KG)	2.1
ADJUSTABILITY	0° to 120° swiveling, 360° rotatable
INFORMATION	9 x LENS SP-14° INCL.DIMMABLE LED POWER SUPPLY 900mA-DC INCL.BEAM LENS 26° INCL.HONEYCOMB INCL.1 x CABLE H05 RN-F 5 x 1mm² 2m
Electrical info	
ELECTRICAL	110-277V / 50-60Hz
CLASS	I
POWER SUPPLY	YES
DIM TYPE	DALI
ENERGY CLASS	F
CERTIFICATES	EPD, RCM
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED cluster 23,4W / CRI>90 (R9: 60) / 3000K / 2654lm
TM-30 VALUES	Rf: 92 / Rg: 99
SDCM	SDCM3
RISKGROUP	RG2
LM80	L80 > 150000
BEAMANGLE	26°
LED TECHNICS (LIGHT SOURCE)	2654lm // 23,4W // 113lm/W
LED TECHNICS (LUMINAIRE)	1486lm // 26,9W // 55lm/W

Requirements

FRAX BRACKET
FRAX PIN
FRAX STRAP

Options

FRAX ANTI VANDAL SCREWS

FRAX MB 93026 HONEYCOMB DIM5

26010 9375 PGR

Accessories

FRAX M KAP


For detailed installation instructions, please consult the manual : [26010_XX75_HAND.pdf](#)

FINISH YOUR SPECIFICATION


Pins and plates for bollards

	<u>26070 0040 FBRX</u> FRAX PIN FBRX	☐
	<u>26070 0040 N</u> FRAX PIN N	☐
	<u>26070 0040 PGR</u> FRAX PIN PGR	☐

Fixation components

	<u>26070 0060 FBRX</u> FRAX BRACKET FBRX	☐
	<u>26070 0060 N</u> FRAX BRACKET N	☐
	<u>26070 0060 PGR</u> FRAX BRACKET PGR	☐

Light altering devices


	<u>26070 0020 N</u> FRAX M KAP N	☐
--	---	--------------------------

DELTALIGHT


FRAX MB 93026 HONEYCOMB DIM5

26010 9375 PGR

Other



26070 0030 FRAX ANTI VANDAL SCREWS 5 PCS

☐

26070 0050 N FRAX STRAP N

☐

Notes: