




M26L - SPY 391 SOFT 93020 MDL

23437 9020 FBR

- AVAILABLE IN
- SCHWARZ 23437 9020 B
 - ALU GEBÜSTET 23437 9020 BRA
 - GEBÜSTETES ANTHRAZIT 23437 9020 BRAT
 - GEBÜSTETES KUPFER 23437 9020 BRCU
 - GEBÜSTETES GOLD 23437 9020 BRG
 - GEBÜSTETE ALTE BRONZE 23437 9020 BROB
 - FLEMISH BRONZE 23437 9020 FBR
 - FLEMISH GOLD 23437 9020 FG
 - GOLDFARBEN 23437 9020 GC
 - KLAVIER SCHWARZ 23437 9020 PB
 - WEISS 23437 9020 W

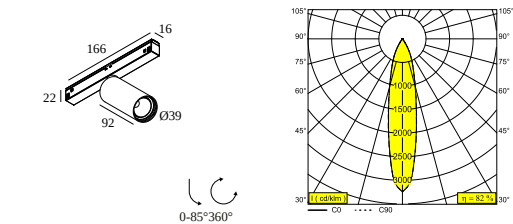

[View on website](#)



General info	
LOCATION	innenbereich
INSTALLATION	Niederspannungssysteme Niederspannungssysteme montiert
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.3
ADJUSTABILITY	0° to 85° schwenkbar, 360° drehbar
INFORMATION	REFLECTOR FL-20° EXCL.LED POWER SUPPLY 48V-DC

Electrical info	
ELECTRICAL	48V-DC
CLASS	III
DIM TYPE	MDL = 1-10V, DALI / Taster
ENERGY CLASS	F
CERTIFICATES	EPD

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 6W / CRI>90 (R9: 50) / 3000K-1800K / 623lm
TM-30 VALUES	rf: 90 / Rg: 99
SDCM	SDCM2
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	20°
LED TECHNICS (LIGHT SOURCE)	623lm // 6W // 105lm/W
LED TECHNICS (LUMINAIRE)	508lm // 6,9W // 74lm/W

Requirements	
SPY 39 TUBE	
LED POWER SUPPLY 48V-DC	

Options	
DIMMABLE MODULATOR	

For detailed installation instructions, please consult the manual : [23437_XXX0_HAND.pdf](#)


FINISH YOUR SPECIFICATION

Stromversorgung

of Fixtures

Min current | Max current

i # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.



21032 0030 SMART 48 MODULATOR PLUG-IN WD

Dimtype: WDL = Drahtlos dimmbar


16

SMART 48

of Fixtures

Min current | Max current


i # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.



300 90 011 SMART 48 MODULATOR DIM9

Dimtype: 1-10V, DALI / Taster

16



300 90 012 SMART 48 MODULATOR WD

Dimtype: WDL = Drahtlos dimmbar


16

LED Betriebsgeräte

of Fixtures

Min current | Max current

i # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.



300 89 48 100 LED POWER SUPPLY 48V-DC / 100W DIN



Dimtype: nicht dimmbar

8


DELTALIGHT

M26L - SPY 391 SOFT 93020 MDL


23437 9020 FBR

	300 89 48 240 LED POWER SUPPLY 48V-DC / 240W DIN	20	☐
Dimtype: nicht dimmbar			
	21012 0230 LED POWER SUPPLY 48V-DC / 100W	8	☐
Dimtype: nicht dimmbar			
Cutout dimension (mm): 40			
	21012 0240 LED POWER SUPPLY 48V-DC / 200W	17	☐
Dimtype: nicht dimmbar			
Cutout dimension (mm): 40			

Beenden Sie Ihr Produkt

	24144 0010 B SPY 39 TUBE B	☐
	24144 0010 FBR SPY 39 TUBE FBR	☐
	24144 0010 FG SPY 39 TUBE FG	☐
	24144 0010 GC SPY 39 TUBE GC	☐
	24144 0010 W SPY 39 TUBE W	☐
	24144 0070 SPY 39 TUBE SBL	☐


COMPATIBLE COMPOSABLES

SHIFTLINE M26L profile (+ SHIFTLINE M26L MATRIX)	Available Colours
	 
23358 0000 SLM26L - PROFILE	


DELTALIGHT

M26L - SPY 391 SOFT 93020 MDL


23437 9020 FBR



23358 0010 SLM26L - PROFILE 1m



23358 0020 SLM26L - PROFILE 2m



23358 0030 SLM26L - PROFILE 3m



Notes: