


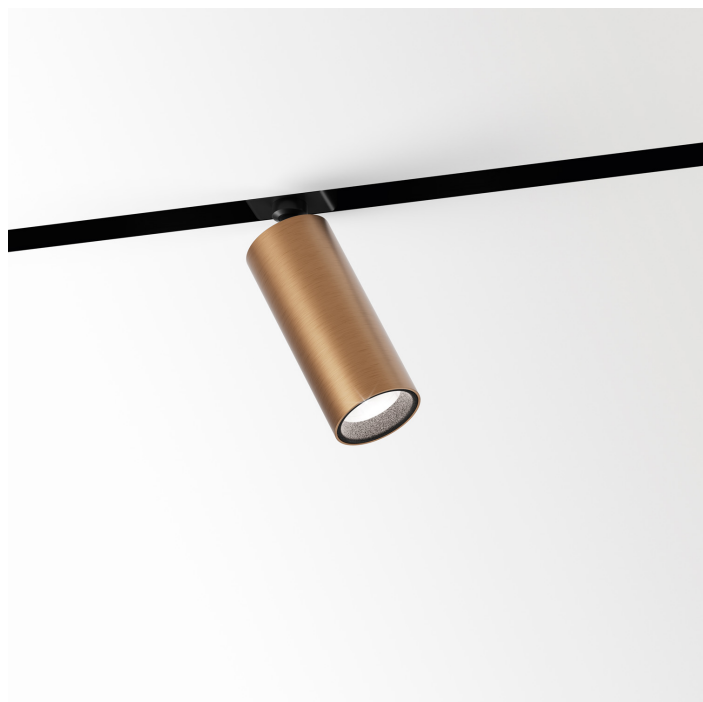

M20/M26H - SPY 391 92720 MDL

23315 9220 BRCU

AVAILABLE IN

BLACK 23315 9220 B

BRUSHED ALU 23315 9220 BRA

BRUSHED ANTHRACITE 23315 9220 BRAT

BRUSHED COPPER 23315 9220 BRCU

BRUSHED GOLD 23315 9220 BRG

BRUSHED OLD BRONZE 23315 9220 BROB

FLEMISH BRONZE 23315 9220 FBR

FLEMISH GOLD 23315 9220 FG

GOLD COLOURED 23315 9220 GC

PIANO BLACK 23315 9220 PB

WHITE 23315 9220 W



[View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Low voltage systems Low voltage system mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.3
ADJUSTABILITY	0° to 85° swiveling, 355° rotatable
INFORMATION	REFLECTOR FL-20° EXCL.LED POWER SUPPLY 48V-DC
Electrical info	
ELECTRICAL	48V-DC
CLASS	III
DIM TYPE	MDL = 1-10V or DALI or push button
ENERGY CLASS	E
CERTIFICATES	CB, ENEC, EPD
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 8,6W / CRI>90 (R9: 60) / 2700K / 1041lm
TM-30 VALUES	rf: 89 / Rg: 100
SDCM	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	20°
LED TECHNICS (LIGHT SOURCE)	1041lm // 8,6W // 121lm/W
LED TECHNICS (LUMINAIRE)	849lm // 9,9W // 86lm/W

Remarks

Take a look at our [MAGNETIC PROFILES](#) movie

Requirements

SPY 39 TUBE or VISOR 39

LED POWER SUPPLY 48V-DC

Options

DIMMABLE MODULATOR

For detailed installation instructions, please consult the manual : [23315_XXX0_HAND.pdf](#)

FINISH YOUR SPECIFICATION

Current supply

of Fixtures

Min current | Max current

 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.



21032 0030 SMART 48 MODULATOR PLUG-IN WD

Dimtype: WDL = wireless dimmable

19

SMART 48

of Fixtures

Min current | Max current


 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.



300 90 011 SMART 48 MODULATOR DIM9

Dimtype: 1-10V or DALI or push button

19



300 90 012 SMART 48 MODULATOR WD

Dimtype: WDL = wireless dimmable


19

LED power supplies

of Fixtures

Min current | Max current

 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.



300 89 48 100 LED POWER SUPPLY 48V-DC / 100W DIN

Dimtype: non-dimmable

10

DELTALIGHT

M20/M26H - SPY 391 92720 MDL

23315 9220 BRCU

	300 89 48 240 LED POWER SUPPLY 48V-DC / 240W DIN	24	☐
	Dimtype: non-dimmable		
	21012 0230 LED POWER SUPPLY 48V-DC / 100W	10	☐
	Dimtype: non-dimmable		
	Cutout dimension (mm): 40		
	21012 0240 LED POWER SUPPLY 48V-DC / 200W	20	☐
	Dimtype: non-dimmable		
	Cutout dimension (mm): 40		

Light altering devices

	24144 0030 B VISOR 39 B	☐
---	--------------------------------	--------------------------

Finish your product

	24144 0010 B SPY 39 TUBE B	☐
	24144 0010 FBR SPY 39 TUBE FBR	☐
	24144 0010 FC SPY 39 TUBE FC	☐
	24144 0010 GC SPY 39 TUBE GC	☐
	24144 0010 W SPY 39 TUBE W	☐
	24144 0070 SPY 39 TUBE SBL	☐

DELTALIGHT

M20/M26H - SPY 391 92720 MDL

23315 9220 BRCU

COMPATIBLE COMPOSABLES

SHIFTLINE M26H FLOOR		Available Colours
	29323 920W SLM26H F MDL WD	
	29323 930W SLM26H F MDL WD	
SHIFTLINE M26H profile		Available Colours
	23359 0000 SLM26H - PROFILE	 
	23359 0010 SLM26H - PROFILE 1m	 
	23359 0020 SLM26H - PROFILE 2m	         
	23359 0030 SLM26H - PROFILE 3m	         
SPLITLINE M20 ST profile		Available Colours
	23397 0000 SPM20 ST - PROFILE	 
	23397 0020 SPM20 ST - PROFILE 2m	 
	23397 0030 SPM20 ST - PROFILE 3m	 

DELTALIGHT

M20/M26H - SPY 391 92720 MDL

23315 9220 BRCU

SPLITLINE M20 profile		Available Colours
	420 20 10 00 SPM20 - PROFILE 1m	
	420 20 20 00 SPM20 - PROFILE 2m	
	420 20 30 00 SPM20 - PROFILE 3m	
	23301 0000 SPM20 - PROFILE B	

Notes: