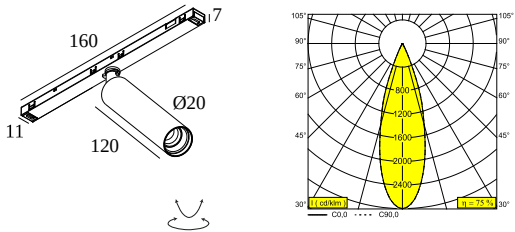




SL19 - SPY 20 L 93030 DIM5

REFERENCE 27029 9325 W

AVAILABLE IN
BLACK 27029 9325 B
FLEMISH BRONZE 27029 9325 FBR
FLEMISH GOLD 27029 9325 FG
GOLD COLOURED 27029 9325 GC
WHITE 27029 9325 W



 [View on website](#)







General info	
LOCATION	indoor
INSTALLATION	Low voltage systems Low voltage system mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.1
ADJUSTABILITY	0° to 90° swiveling, 355° rotatable
INFORMATION	REFLECTOR FL-30° EXCLLED POWER SUPPLY 48V-DC SPY 20 TUBE B included
Electrical info	
ELECTRICAL	48V-DC
CLASS	III
DIM TYPE	DALI
ENERGY CLASS	E
CERTIFICATES	CB, ENEC
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 2W / CRI>90 (R9: 60) / 3000K / 240lm
TM-30 VALUES	Rf: 91 / Rg: 101
SDCM	SDCM3
RISKGROUP	RG2
LM80	L90B10 > 150000
BEAMANGLE	30°
LED TECHNICS (LIGHT SOURCE)	240lm // 2W // 120lm/W
LED TECHNICS (LUMINAIRE)	181lm // 2,3W // 79lm/W
Requirements	
LED POWER SUPPLY 48V-DC	

For detailed installation instructions, please consult the manual : [27029_XXX5_HAND.pdf](#)



SL19 - SPY 20 L 93030 DIM5

27029 9325 W

FINISH YOUR SPECIFICATION

LED power supplies		# of Fixtures
<div><div></div><div># of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the ' ' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.</div></div>		Min current Max current
<div><div></div><div>300 89 48 100 LED POWER SUPPLY 48V-DC / 100W DIN</div></div>	Dimtype: non-dimmable	37 <input type="text"/>
<div><div></div><div>300 89 48 240 LED POWER SUPPLY 48V-DC / 240W DIN</div></div>	Dimtype: non-dimmable	90 <input type="text"/>
<div><div></div><div>21012 0230 LED POWER SUPPLY 48V-DC / 100W</div></div>	Dimtype: non-dimmable Cutout dimension (mm): 40	37 <input type="text"/>
<div><div></div><div>21012 0240 LED POWER SUPPLY 48V-DC / 200W</div></div>	Dimtype: non-dimmable Cutout dimension (mm): 40	75 <input type="text"/>

COMPATIBLE COMPOSABLES

SHIFTLINE 19 profile	Available Colours
<div><div></div><div>27011 0050 SL19 - PROFILE 2m</div></div>	<div><div></div><div></div></div>
<div><div></div><div>27011 0060 SL19 - PROFILE 3m</div></div>	<div><div></div><div></div></div>

Notes:

DELTALIGHT

SL19 - SPY 20 L 93030 DIM5

27029 9325 W