

SUPERLOOP-FIX MDL



Used with the Superloop MDL, Delta Light's custom engineered 48V low voltage suspended track. Fix Superloop MDL is offered with either direct or indirect illumination. An optional Glass Tube can be selected for a classic chandelier look.

Specification	
LED Aperture:	1 ⁹ / ₁₆ "
Adjustability:	Fixed
Rating:	IP20

Performance	Fix 40	Fix 45
LED Maintenance:	L90>45,500h	
McAdam Step:	2	
CRI:	80	90

*Power	Down	Up (Optional)
Fix 40:	4.1W	2.1W
Fix 45:	8.1W	

Delivered Lumens	2700K		3000K		3500K	
*Optic:	20°	40°	20°	40°	20°	40°
Fix 40 Down:	328Lm		328Lm		328Lm	
Fix 40 Down-Up:	486Lm		488Lm		496Lm	
Fix 40 Down-Up Glass:	486Lm		488Lm		496Lm	
Fix 45 Down:		623Lm		623Lm		623Lm

Listing

ETL certified to US and Canadian safety standards.

Warranty

5-year limited warranty.

Ordering

ALL BOXES MUST BE FILLED IN TO CORRECTLY ORDER

Example: FIX40-SPDGC27A-B-SLP-MDL

		-					-		-		-	
Luminaire	Size	Downlight*	Uplight*	Glass Tube	CCT	Function	Finish	Finish ⁽¹⁾		Style		
FIX FIX	40	SP Standard Power	DN Downlight only, no uplight	X No Glass	27 2700K	A Adjustable	B Black	B ⁽¹⁾ Black	SLP-MDL ⁽²⁾ Superloop MDL			
			DU Downlight with uplight added		30 3000K			FBR ⁽¹⁾ Flemish Bronze				
			DG Downlight with uplight & glass accessory added		35 3500K			FG ⁽¹⁾ Flemish Gold				
								MMAT ⁽¹⁾ Gold Matte				
	45	SP Standard Power	DN Downlight only, no uplight	X No Glass				SG ⁽¹⁾ Silver Grey				
							W ⁽¹⁾ White					

¹ Only applies to Size 45.


² For use on Superloop MDL; 48V power supplied with Superloop MDL.

Related Products


Superloop-Spy MDL, Superloop-XY180 MDL, Superloop-Vizir/Hedra MDL, Spy 27, Spy 39, Spy 52, Spy 66, Spy 90, Spy Focus, Spy C (pendant)

Finish Options


FIX 40 DOWN

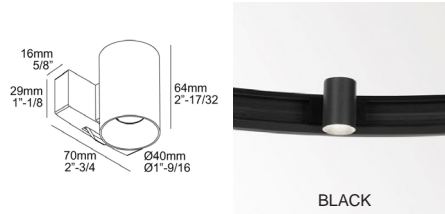

FIX 40 DOWN-UP

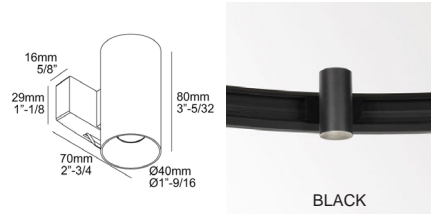


FIX 45 DOWN

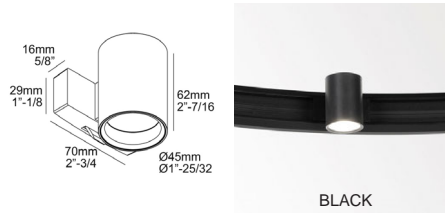

FIX 40 DOWN-UP WITH GLASS




INNER FINISH - For Size 45 only

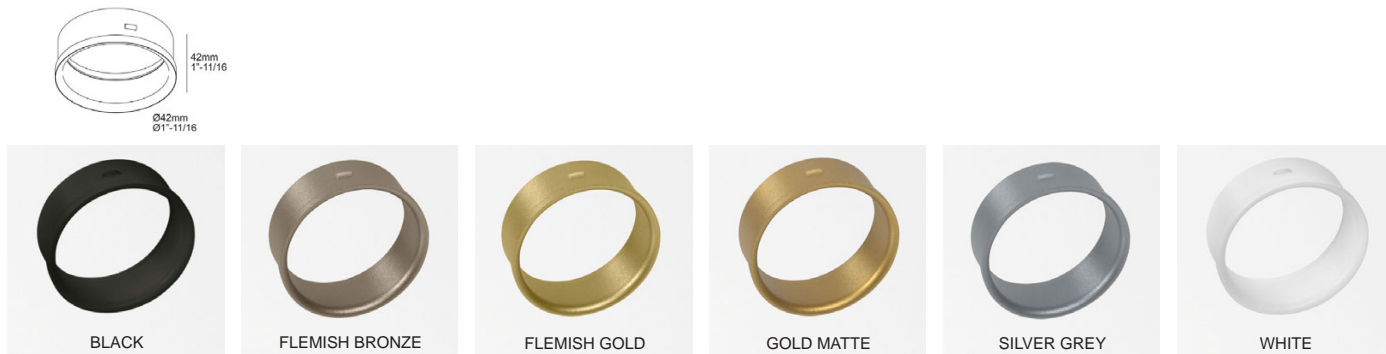


Photometric Data


FIX 40 DOWN



FIX 40 DOWN-UP



FIX 45 DOWN



Installation Options

Delta Light's Superloop suspended track system utilizes 48V power supplies. With several power options available, the below details maximum luminaire modules per power supply by type.

Maximum Capacity Per Power Supply	Power Box L	Power Box H	Remote Power Supply
*Fix 40 Down:	12	18	18
*Fix 40 Down-Up:	7	13	13
*Fix 45 Down:	6	9	9

FOR SYSTEM HARDWARE, REFER TO THE FOLLOWING:
Superloop MDL (suspended rings, rectangles, & squares)

As technology changes, please use information above as guidance. For most recent updated information please contact factory. Specifications subject to change without notice.