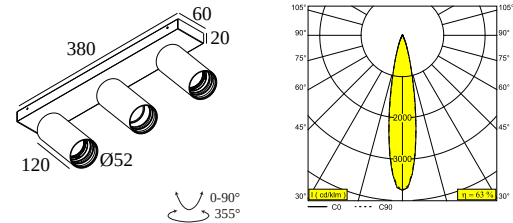




SPY 52 ON 3 92720 DIM8

19828 9228 W-W

AVAILABLE IN
BLACK-BLACK 19828 9228 B-B
FULL WHITE 19828 9228 FW
WHITE-WHITE 19828 9228 W-W



 [View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Ceiling Surface mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	1.6
ADJUSTABILITY	0° to 90° swiveling, 355° rotatable
INFORMATION	3 x REFLECTOR FL-20° INCL.DIMMABLE LED POWER SUPPLY 350/500mA-DC Current selection via jumper on power supply Optional REFLECTORS 30° & 45° available
Electrical info	
ELECTRICAL	220-240V / 50-60Hz
CLASS	I
POWER SUPPLY	YES
DIM TYPE	mains (phase cut-off)
ENERGY CLASS	D
CERTIFICATES	CB, ENEC, RCM
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	@500mA: 3 x (LED array 8,6W / CRI>90 (R9: 60) / 2700K / 1041lm) Or @350mA: 3 x (LED array 5,8W / CRI>90 (R9: 60) / 2700K / 753lm)
TM-30 VALUES	@500mA: rf: 89 / Rg: 100 @350mA: rf: 89 / Rg: 100
SDCM	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	20°
LED TECHNICS (LIGHT SOURCE)	@500mA: 3123lm // 25,8W // 121lm/W Or @350mA: 2259lm // 17,4W // 129lm/W
LED TECHNICS (LUMINAIRE)	@500mA: 1957lm // 29,7W // 66lm/W Or @350mA: 1415lm // 20W // 71lm/W
Requirements	
SPY 52 TUBE	
Accessories	
HONEYCOMB 42 SPREAD LENS 42	

DELTALIGHT

SPY 52 ON 3 92720 DIM8





19828 9228 W-W

LINEAR SPREAD LENS 42
SOFTENING LENS 42
GLASS SBL 42

For detailed installation instructions, please consult the manual : [19828_XXX8_HAND.pdf](#)

FINISH YOUR SPECIFICATION

Light altering devices

	¹³ 19810 0010 B HONEYCOMB 42 SINGLE USE B	☐
	¹³ 19810 0020 LINEAR SPREAD LENS 42	☐
	¹³ 19810 0030 SPREAD LENS 42	☐
	¹³ 19810 0040 SOFTENING LENS 42	☐
	¹³ 19810 0050 GLASS SBL 42	☐
	¹⁴ 19810 0060 B HONEYCOMB 42 DOUBLE USE B	☐

DELTALIGHT

SPY 52 ON 3 92720 DIM8

19828 9228 W-W

Finish your product

	19810 0100 B SPY 52 TUBE B	☐
	19810 0100 FBR SPY 52 TUBE FBR	☐
	19810 0100 FG SPY 52 TUBE FG	☐
	19810 0100 GC SPY 52 TUBE GC	☐
	19810 0100 W SPY 52 TUBE W	☐

Replaceable reflector / lens

	19810 0180 SPY 52 REFLECTOR 20°	☐
	19810 0190 SPY 52 REFLECTOR 45°	☐
	19810 0240 SPY 52 REFLECTOR 30°	☐

Notes: