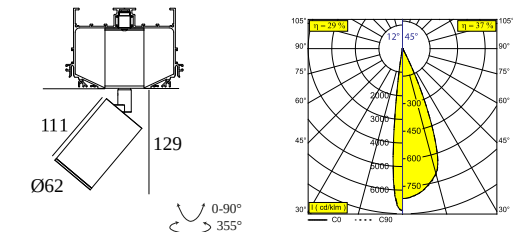




M52 - SPY FOCUS MP 930 MDL
24426 9300 FBR

AVAILABLE IN
BLACK 24426 9300 B
FLEMISH BRONZE 24426 9300 FBR
FLEMISH GOLD 24426 9300 FG
WHITE 24426 9300 W



[View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Low voltage systems Low voltage system mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.5
ADJUSTABILITY	0° to 90° swiveling, 355° rotatable
INFORMATION	ADJUSTABLE BEAM 12°-45° INCL.CLIP 48V ADAPTER EXCL.LED POWER SUPPLY 48V-DC

Electrical info	
ELECTRICAL	48V-DC
CLASS	III
DIM TYPE	MDL = 1-10V or DALI or push button
ENERGY CLASS	E
CERTIFICATES	CB, EAC, ENEC, EPD

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 17,2W / CRI>90 (R9: 52) / 3000K / 2101lm
TM-30 VALUES	rf: 90 / Rg: 99
SDCM	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	12°-45°
LED TECHNICS (LIGHT SOURCE)	2101lm // 17,2W // 123lm/W
LED TECHNICS (LUMINAIRE)	735lm // 19,8W // 37lm/W

Requirements
LED POWER SUPPLY 48V-DC

Options
DIMMABLE MODULATOR

For detailed installation instructions, please consult the manual : [24426_9X00_HAND.pdf](#)

M52 - SPY FOCUS MP 930 MDL

24426 9300 FBR

FINISH YOUR SPECIFICATION

Current supply

of Fixtures



of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current



21032 0030 SMART 48 MODULATOR PLUG-IN WD

9

Dimtype: WDL = wireless dimmable

SMART 48

of Fixtures



of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current



300 90 011 SMART 48 MODULATOR DIM9

9

Dimtype: 1-10V or DALI or push button



300 90 012 SMART 48 MODULATOR WD

9

Dimtype: WDL = wireless dimmable


LED power supplies

of Fixtures



of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current




300 89 48 90 LED POWER SUPPLY 48V-DC / 90W

5

Dimtype: non-dimmable

Cutout dimension (mm): 75



300 89 48 100 LED POWER SUPPLY 48V-DC / 100W DIN

5

Dimtype: non-dimmable





DELTALIGHT

M52 - SPY FOCUS MP 930 MDL

24426 9300 FBR

	300 89 48 150 LED POWER SUPPLY 48V-DC / 150W	7	☐
Dimtype: non-dimmable			
	300 89 48 240 LED POWER SUPPLY 48V-DC / 240W DIN	12	☐
Dimtype: non-dimmable			
	21012 0230 LED POWER SUPPLY 48V-DC / 100W	5	☐
Dimtype: non-dimmable			
Cutout dimension (mm): 40			
	21012 0240 LED POWER SUPPLY 48V-DC / 200W	10	☐
Dimtype: non-dimmable			
Cutout dimension (mm): 40			

COMPATIBLE COMPOSABLES

SPLITLINE M52 profile		Available Colours
	<u>420 52 10 00</u> SPM52 - PROFILE 1m	☒
	<u>420 52 20 00</u> SPM52 - PROFILE 2m	☒
	<u>420 52 30 00</u> SPM52 - PROFILE 3m	☒
	<u>24413 0000</u> SPM52 - PROFILE	☒

DELTALIGHT

M52 - SPY FOCUS MP 930 MDL

24426 9300 FBR

Notes: