



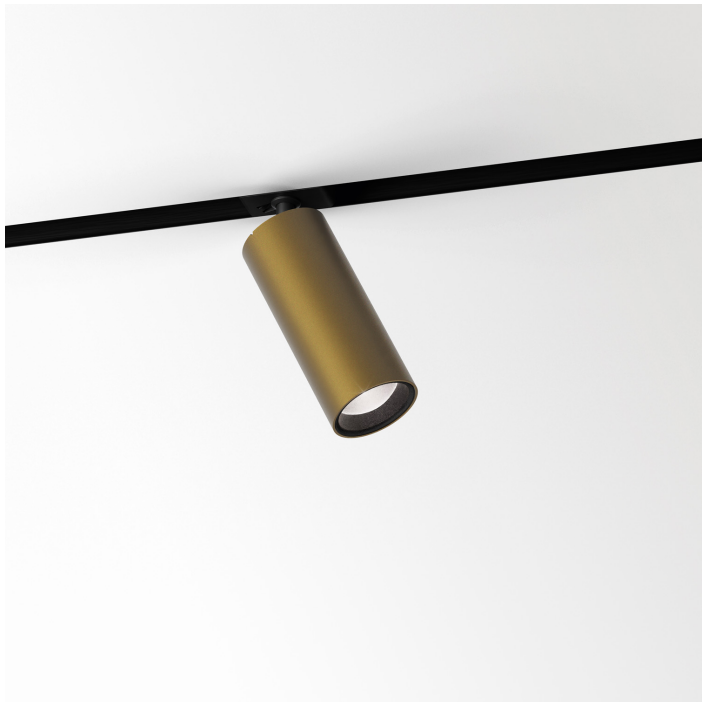

M20/M26H - SPY 39 FOCUS 930 MDL

REFERENCE 23415 9300 FG

- AVAILABLE IN
- BLACK 23415 9300 B
 - BRUSHED ALU 23415 9300 BRA
 - BRUSHED ANTHRACITE 23415 9300 BRAT
 - BRUSHED COPPER 23415 9300 BRCU
 - BRUSHED GOLD 23415 9300 BRG
 - BRUSHED OLD BRONZE 23415 9300 BROB
 - FLEMISH BRONZE 23415 9300 FBR
 - FLEMISH GOLD 23415 9300 FG
 - GOLD COLOURED 23415 9300 GC
 - WHITE 23415 9300 W

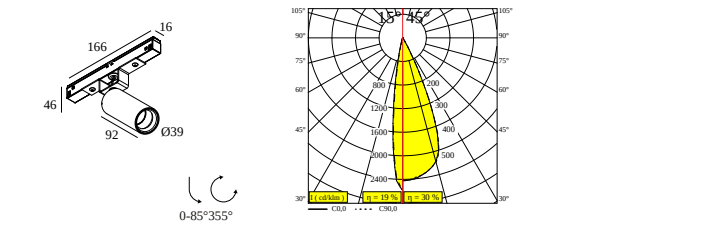

[View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Low voltage systems Low voltage system mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.3
ADJUSTABILITY	0° to 85° swiveling, 355° rotatable
INFORMATION	ADJUSTABLE BEAM 15°-45° EXCL.LED POWER SUPPLY 48V-DC
Electrical info	
ELECTRICAL	48V-DC
CLASS	III
DIM TYPE	MDL = 1-10V or DALI or push button
ENERGY CLASS	E
CERTIFICATES	EPD
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 8,6W / CRI>90 (R9: 52) / 3000K / 1018lm
TM-30 VALUES	Rf: 90 / Rg: 99
SDCM	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	15°-45°
LED TECHNICS (LIGHT SOURCE)	1018lm // 8,6W // 118lm/W
LED TECHNICS (LUMINAIRE)	303lm // 9,9W // 31lm/W

Requirements
LED POWER SUPPLY 48V-DC

Options
DIMMABLE MODULATOR

For detailed installation instructions, please consult the manual : [23415_XXX0_HAND.pdf](#)


FINISH YOUR SPECIFICATION

Current supply

of Fixtures

i # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current



21032 0030 SMART 48 MODULATOR PLUG-IN WD

19


Dimtype: WDL = wireless dimmable

SMART 48

of Fixtures

i # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.


Min current | Max current



300 90 011 SMART 48 MODULATOR DIM9

19

Dimtype: 1-10V or DALI or push button



300 90 012 SMART 48 MODULATOR WD

19


Dimtype: WDL = wireless dimmable

LED power supplies

of Fixtures

i # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current



300 89 48 100 LED POWER SUPPLY 48V-DC / 100W DIN




10

Dimtype: non-dimmable





DELTALIGHT

M20/M26H - SPY 39 FOCUS 930 MDL

23415 9300 FG

	300 89 48 240 LED POWER SUPPLY 48V-DC / 240W DIN	24	☐
Dimtype: non-dimmable			
	21012 0230 LED POWER SUPPLY 48V-DC / 100W	10	☐
Dimtype: non-dimmable			
Cutout dimension (mm): 40			
	21012 0240 LED POWER SUPPLY 48V-DC / 200W	20	☐
Dimtype: non-dimmable			
Cutout dimension (mm): 30			

COMPATIBLE COMPOSABLES

SHIFTLINE M26H profile		Available Colours
	<u>23359 0000</u> SLM26H - PROFILE	 
	<u>23359 0010</u> SLM26H - PROFILE 1m	 
	<u>23359 0020</u> SLM26H - PROFILE 2m	           
	<u>23359 0030</u> SLM26H - PROFILE 3m	           
SPLITLINE M20 ST profile		Available Colours
	<u>23397 0000</u> SPM20 ST - PROFILE	 

DELTALIGHT

M20/M26H - SPY 39 FOCUS 930 MDL

23415 9300 FG



23397 0020 SPM20 ST - PROFILE 2m




23397 0030 SPM20 ST - PROFILE 3m




SPLITLINE M20 profile


Available Colours




420 20 10 00 SPM20 - PROFILE 1m



420 20 20 00 SPM20 - PROFILE 2m



420 20 30 00 SPM20 - PROFILE 3m



23301 0000 SPM20 - PROFILE B



Notes: