



COMPO M 93020

9 15727 9320 B


AVAILABLE IN

NOIR 9 15727 9320 B

CHROME 9 15727 9320 C

CHROME FONCÉ 9 15727 9320 DC

BLANC 9 15727 9320 W

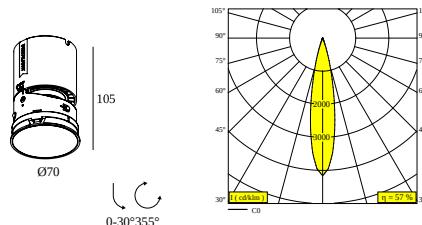

 [View on website](#)



General info	
LOCATION	interieur
INSTALLATION	Plafond Encastré
CUTOUT SHAPE/SIZE (MM)	circulaire - 110
RECESSED DEPTH (MM)	105
THICKNESS OF MOUNTING SURFACE (MM)	max.25
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.256
ADJUSTABILITY	0° à 30° inclinable, 355° rotatif

Electrical info	
CLASS	III
DIM TYPE	selon le type d'alimentation externe
ENERGY CLASS	F

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 12,5W / CRI>90 (R9: 52) / 3000K / 1378lm
RVALUES	rf: 90 / Rg: 99
SDMC	SDCM2
RISKGROUP	RG1
BEAMANGLE	20°
LED TECHNICS (LIGHT SOURCE)	1378lm // 12,5W // 110lm/W
LED TECHNICS (LUMINAIRE)	791lm // 14,4W // 55lm/W

Requirements	
LED POWER SUPPLY 700 mA - DC	

Accessories	
COMPO M HONEYCOMB SINGLE USE B	
COMPO M LINEAR SPREAD LENS	
COMPO M SPREAD LENS	
COMPO M SOFTENING LENS	
COMPO M GLASS SBL	

For detailed installation instructions, please consult the manual : [9_15727_XXX0_HAND.pdf](#)

COMPO M 93020

9 15727 9320 B

CEILING COMPATIBILITY

Ceiling Type	Mounting Kit	
 System ceiling	 15710 0020 - MOUNTING KIT COMPO M TRIM	Required
	 15710 0050 - MOUNTING KIT COMPO M TRIMLESS	Required
 Plasterboard	 15710 0020 - MOUNTING KIT COMPO M TRIM	Required
	 15710 0050 - MOUNTING KIT COMPO M TRIMLESS	Required
 Wood	 15710 0020 - MOUNTING KIT COMPO M TRIM	Required
	 15710 0050 - MOUNTING KIT COMPO M TRIMLESS	Required

FINISH YOUR SPECIFICATION

alimentation led	# of Fixtures
 web2print_power_supply_info_box	Min current Max current
15710 3100 LED POWER SUPPLY 18W NO DIM 1400mA	1->4 ☐
15710 3500 LED POWER SUPPLY MULTIPOWER 15W NO DIM 700mA	1 ☐
15710 4000 LED POWER SUPPLY MULTIPOWER 15W DIM8 700mA	1 ☐
15710 4900 LED POWER SUPPLY MULTIPOWER 20W DIM1 700mA	1 ☐
15710 5000 LED POWER SUPPLY MULTIPOWER 55W DALI DT6 1400mA Dimtype: DALI	1->13 ☐
15710 5600 LED POWER SUPPLY MULTIPOWER 20W DALI DT6 700mA Dimtype: DALI	1 ☐

kit de montage

 15710 0020 B MOUNTING KIT COMPO M TRIM B	☐
15710 0020 W MOUNTING KIT COMPO M TRIM W	☐

COMPO M 93020

9 15727 9320 B



15710 0050 MOUNTING KIT COMPO M TRIMLESS

☐

Cutout dimension (mm): 76

modifier les dispositifs de lumière

15710 1100 B COMPO M HONEYCOMB SINGLE USE B

☐

15710 1110 COMPO M LINEAR SPREAD LENS

☐

Cutout dimension (mm): 32,5

15710 1120 COMPO M SPREAD LENS

☐

Cutout dimension (mm): 32,5

15710 1130 COMPO M SOFTENING LENS

☐

Cutout dimension (mm): 32,5

15710 1140 COMPO M GLASS SBL

☐

Cutout dimension (mm): 32,5

Notes: