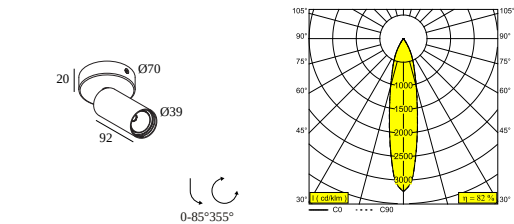




SPY 39 ON SOFT 93020

24175 9020 W

- AVAILABLE IN
- BLACK 24175 9020 B
 - BRUSHED ALU 24175 9020 BRA
 - BRUSHED ANTHRACITE 24175 9020 BRAT
 - BRUSHED COPPER 24175 9020 BRCU
 - BRUSHED GOLD 24175 9020 BRG
 - BRUSHED OLD BRONZE 24175 9020 BROB
 - FLEMISH BRONZE 24175 9020 FBR
 - FLEMISH GOLD 24175 9020 FG
 - FULL WHITE 24175 9020 FW
 - GOLD COLOURED 24175 9020 GC
 - PIANO BLACK 24175 9020 PB
 - WHITE 24175 9020 W



[View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Ceiling Surface mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.4
ADJUSTABILITY	0° to 85° swiveling, 355° rotatable
INFORMATION	REFLECTOR FL-20° EXCL.DIMMABLE LED POWER SUPPLY 350mA-DC
Electrical info	
CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	F
CERTIFICATES	LCA
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 6W / CRI>90 (R9: 50) / 3000K-1800K / 623lm
TM-30 VALUES	rf: 90 / Rg: 99
SDCM	SDCM2
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	20°
LED TECHNICS (LIGHT SOURCE)	623lm // 6W // 105lm/W
LED TECHNICS (LUMINAIRE)	508lm // 6,9W // 74lm/W

Requirements
SPY 39 TUBE
LED POWER SUPPLY 350mA-DC DIM

Options
COVERSET R 90-100


SPY 39 ON SOFT 93020

24175 9020 W

For detailed installation instructions, please consult the manual : [24175_XXX0_HAND.pdf](#)

FINISH YOUR SPECIFICATION

Emergency units



21032 0270 B EMERGENCY UNIT 7W / 1h + LED INDICATOR HOLDER B

☐

Cutout dimension (mm): 27

21032 0270 W EMERGENCY UNIT 7W / 1h + LED INDICATOR HOLDER W

☐


LED power supplies

of Fixtures



of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current




300 48 350 ED1 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM1

2

☐

Dimtype: 1-10V

Cutout dimension (mm): 30




300 48 350 ED5 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5

2

☐

Dimtype: DALI

Cutout dimension (mm): 45




300 48 350 MDL LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W MDL

2

☐

Dimtype: non-dimmable

Cutout dimension (mm): 30




300 48 350 WDL LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W WDL

2

☐

Dimtype: WDL = wireless dimmable

Cutout dimension (mm): 45



300 90 61 LED POWER SUPPLY MULTI-POWER DIM6

2

☐











Dimtype: mains (phase cut-off) or push button

Cutout dimension (mm): 56

DELTALIGHT

SPY 39 ON SOFT 93020






24175 9020 W

	300 90 63 LED POWER SUPPLY MULTI-POWER DIM9 Dimtype: 1-10V or DALI or push button Cutout dimension (mm): 82	4(4) ☐
	300 90 64 LED POWER SUPPLY MULTI-POWER DIM7 Dimtype: 1-10V or push button Cutout dimension (mm): 72	3(2) ☐
	300 90 67 LED POWER CONVERTER 24V-DC TO MULTI CURRENT 48W DIM9 Dimtype: 1-10V or DALI or push button	2 ☐
	300 90 68 LED POWER SUPPLY MULTI-POWER DIM5 Dimtype: DALI Cutout dimension (mm): 72	2(2) ☐
	300 90 69 LED POWER SUPPLY MULTI-POWER HV DIM9 Dimtype: 1-10V or DALI or push button Cutout dimension (mm): 84	2->6(6) ☐
	300 90 124 LED POWER SUPPLY MULTI-POWER DIM7 Dimtype: 1-10V or push button Cutout dimension (mm): 55	2(2) ☐
	300 90 125 LED POWER SUPPLY MULTI-POWER MINI DIM5 Dimtype: DALI Cutout dimension (mm): 55	2(2) ☐
	21012 0021 LED POWER SUPPLY MULTI POWER DIM1 Dimtype: 1-10V Cutout dimension (mm): 54	3 ☐
	21012 0035 LED POWER SUPPLY MULTI POWER DIM5 Dimtype: DALI Cutout dimension (mm): 54	3 ☐
	21012 004W LED POWER SUPPLY MULTI-POWER WDL Dimtype: WDL = wireless dimmable Cutout dimension (mm): 84	4(4) ☐


DELTALIGHT

SPY 39 ON SOFT 93020


24175 9020 W

	21012 005W LED POWER SUPPLY MULTI-POWER COMPACT WDL	3	☐
Dimtype: WDL = wireless dimmable			
Cutout dimension (mm): 54			
	21012 0268 LED POWER SUPPLY MULTI POWER 200-350 / 15W DIM8	2->2	☐
Dimtype: mains (phase cut-off)			
Cutout dimension (mm): 50			
	21012 0298 LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8	2	☐
Dimtype: mains (phase cut-off)			
Cutout dimension (mm): 48			
	21012 0308 LED POWER SUPPLY 350mA / 7,35W DIM8	1	☐
Dimtype: mains (phase cut-off)			
Cutout dimension (mm): 40			
	21032 0295 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5	2	☐
Dimtype: DALI			
Cutout dimension (mm): 30			

Coversets

	204 00 100 ANO COVERSET R 100 ANO	☐
	204 00 100 B COVERSET R 100 B	☐
	204 00 100 W COVERSET R 100 W	☐

Finish your product

	24144 0010 B SPY 39 TUBE B	☐
	24144 0010 FBR SPY 39 TUBE FBR	☐

DELTALIGHT

SPY 39 ON SOFT 93020

24175 9020 W

	<u>24144 0010 FG</u>	SPY 39 TUBE FG	☐
	<u>24144 0010 GC</u>	SPY 39 TUBE GC	☐
	<u>24144 0010 W</u>	SPY 39 TUBE W	☐
	<u>24144 0070</u>	SPY 39 TUBE SBL	☐

Notes: