




LUNELLE 52 M26L 92730 MDL

32822 9220 BRA-B

- AVAILABLE IN
- BRUSHED ALU-BLACK 32822 9220 BRA-B
 - BRUSHED ALU-WHITE 32822 9220 BRA-W
 - BRUSHED ANTHRACITE-BLACK 32822 9220 BRAT-B
 - BRUSHED ANTHRACITE-WHITE 32822 9220 BRAT-W
 - BRUSHED BROWN BRONZE BLACK 32822 9220 BRBB-B
 - BRUSHED BROWN BRONZE WHITE 32822 9220 BRBB-W
 - BRUSHED COPPER-BLACK 32822 9220 BRCU-B
 - BRUSHED COPPER-WHITE 32822 9220 BRCU-W
 - BRUSHED GOLD-BLACK 32822 9220 BRG-B
 - BRUSHED GOLD-WHITE 32822 9220 BRG-W
 - BRUSHED OLD BRONZE-BLACK 32822 9220 BROB-B
 - BRUSHED OLD BRONZE-WHITE 32822 9220 BROB-W

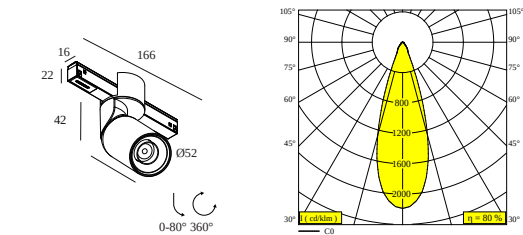

[View on website](#)




General info	
LOCATION	indoor
INSTALLATION	Ceiling Low voltage system mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.4
Electrical info	
ELECTRICAL	48V-DC
CLASS	III
DIM TYPE	MDL = 1-10V or DALI or push button
ENERGY CLASS	G
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED 5,6W / CRI>90 (R9: 80) / 2700K / 485lm
SDCM	SDCM3
RISKGROUP	RG2
BEAMANGLE	30°
LED TECHNICS (LIGHT SOURCE)	485lm // 5,6W // 86lm/W
LED TECHNICS (LUMINAIRE)	388lm // 6,4W // 60lm/W
Requirements	
LED POWER SUPPLY 48V-DC	
Options	
DIMMABLE MODULATOR	
Accessories	
VISOR 52	

For detailed installation instructions, please consult the manual : [32822_XXX0_HAND.pdf](#)

FINISH YOUR SPECIFICATION

Light altering devices



32810 0010 DC VISOR 52 DC



Notes: