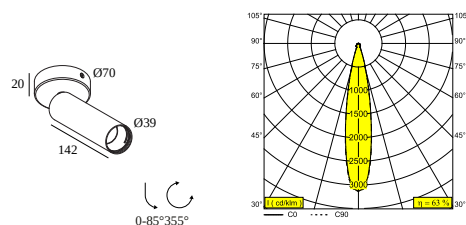




SPY 39 L ON 92720

24136 9220 W

AVAILABLE IN
NOIR 24136 9220 B
FLEMISH BRONZE 24136 9220 FBR
FLEMISH GOLD 24136 9220 FG
ENTIÈREMENT BLANC 24136 9220 FW
COULEUR OR 24136 9220 GC
BLANC 24136 9220 W



[View on website](#)



General info

LOCATION	interieur
INSTALLATION	Plafond Applique
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.5
ADJUSTABILITY	0° à 85° inclinable, 355° rotatif
INFORMATION	REFLECTOR FL-20° EXCL.LED POWER SUPPLY 350-500mA-DC

Electrical info

CLASS	III
DIM TYPE	selon le type d'alimentation externe
ENERGY CLASS	E
CERTIFICATION	CB, ENEC, LCA

Lightsource info

LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 5,8-8,6W / CRI>90 (R9: 60) / 2700K / 753-1041lm
RVALUES	rf: 89 / Rg: 100
SDMC	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	20°
LED TECHNICS (LIGHT SOURCE)	1041lm // 8,6W // 121lm/W
LED TECHNICS (LUMINAIRE)	652lm // 9,9W // 66lm/W

Requirements









SPY 39 L TUBE
 LED POWER SUPPLY 350 / 500mA-DC DIM

Options

COVERSET R 90-100

For detailed installation instructions, please consult the manual : [24136_XXX0_HAND.pdf](#)

FINISH YOUR SPECIFICATION

les alimentations led		# of Fixtures
 web2print_power_supply_info_box		Min current Max current
	300 48 350 ED1 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM1 Dimtype: 1 à 10 V Cutout dimension (mm): 30	2 ☐
	300 48 350 ED5 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5 Dimtype: DALI Cutout dimension (mm): 45	2 ☐
	300 48 350 MDL LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W MDL Dimtype: non dimmable Cutout dimension (mm): 30	2 ☐
	300 48 350 WDL LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W WDL Dimtype: WDL = dimmable sans fil Cutout dimension (mm): 45	2 ☐
	300 48 500 ED1 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM1 Dimtype: 1 à 10 V Cutout dimension (mm): 30	2 ☐
	300 48 500 ED5 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5 Dimtype: DALI Cutout dimension (mm): 45	2 ☐
	300 48 500 MDL LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W MDL Dimtype: non dimmable Cutout dimension (mm): 30	2 ☐
	300 48 500 WDL LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W WDL Dimtype: WDL = dimmable sans fil Cutout dimension (mm): 45	2 ☐

SPY 39 L ON 92720







24136 9220 W

	300 90 61 LED POWER SUPPLY MULTI-POWER DIM6 Dimtype: fin de phase ou bouton poussoir Cutout dimension (mm): 56	2 2	☐
	300 90 63 LED POWER SUPPLY MULTI-POWER DIM9 Dimtype: 1 à 10 V ou DALI ou bouton poussoir Cutout dimension (mm): 82	4(4) 4(4)	☐
	300 90 64 LED POWER SUPPLY MULTI-POWER DIM7 Dimtype: 1 à 10 V ou bouton poussoir Cutout dimension (mm): 72	2(2) 2(1)	☐
	300 90 67 LED POWER CONVERTER 24V-DC TO MULTI CURRENT 48W DIM9 Dimtype: 1 à 10 V ou DALI ou bouton poussoir	2 -	☐
	300 90 68 LED POWER SUPPLY MULTI-POWER DIM5 Dimtype: DALI Cutout dimension (mm): 72	2(2) 2(1)	☐
	300 90 69 LED POWER SUPPLY MULTI-POWER HV DIM9 Dimtype: 1 à 10 V ou DALI ou bouton poussoir Cutout dimension (mm): 84	2->6(6) 6(4)	☐
	300 90 124 LED POWER SUPPLY MULTI-POWER DIM7 Dimtype: 1 à 10 V ou bouton poussoir Cutout dimension (mm): 55	3(2) 2(1)	☐
	300 90 125 LED POWER SUPPLY MULTI-POWER MINI DIM5 Dimtype: DALI Cutout dimension (mm): 55	2(2) 2(1)	☐
	300 90 135 LED POWER SUPPLY MULTI-POWER HV Dimtype: non dimmable Cutout dimension (mm): 90	3->4 2->4	☐
	21012 0010 LED POWER SUPPLY MULTI POWER Dimtype: non dimmable Cutout dimension (mm): 50	2 2	☐

DELTALIGHT

SPY 39 L ON 92720





24136 9220 W

	<u>21012 0021</u> LED POWER SUPPLY MULTI POWER DIM1 Dimtype: 1 à 10 V Cutout dimension (mm): 54	3 3	☐
	<u>21012 0035</u> LED POWER SUPPLY MULTI POWER DIM5 Dimtype: DALI Cutout dimension (mm): 54	3 3	☐
	<u>21012 004W</u> LED POWER SUPPLY MULTI-POWER WDL Dimtype: WDL = dimmable sans fil Cutout dimension (mm): 84	4(4) 3(3)	☐
	<u>21012 005W</u> LED POWER SUPPLY MULTI-POWER COMPACT WDL Dimtype: WDL = dimmable sans fil Cutout dimension (mm): 54	3 3	☐
	<u>21012 0268</u> LED POWER SUPPLY MULTI POWER 200-350 / 15W DIM8 Dimtype: fin de phase Cutout dimension (mm): 50	2->2 0	☐
	<u>21012 0278</u> LED POWER SUPPLY MULTI POWER 500-700 / 20W DIM8 Dimtype: fin de phase Cutout dimension (mm): 55	1	☐
	<u>21012 0288</u> LED POWER SUPPLY MULTI POWER 500-700 / 36W DIM8 Dimtype: fin de phase Cutout dimension (mm): 55	2->3	☐
	<u>21012 0298</u> LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8 Dimtype: fin de phase Cutout dimension (mm): 48	2 2	☐
	<u>21012 0308</u> LED POWER SUPPLY 350mA / 7,35W DIM8 Dimtype: fin de phase Cutout dimension (mm): 40	1	☐
	<u>21012 0318</u> LED POWER SUPPLY 500mA / 10W DIM8 Dimtype: fin de phase Cutout dimension (mm): 40	1	☐



DELTALIGHT

SPY 39 L ON 92720

24136 9220 W

	<u>21012 0480</u>	LED POWER SUPPLY 350mA-DC / 17W IP68	2(2)	☐
	Dimtype: non dimmable			
	Cutout dimension (mm): 60			
	<u>21012 0500</u>	LED POWER SUPPLY 500mA-DC / 24W IP68	2(1)	☐
	Dimtype: non dimmable			
	Cutout dimension (mm): 60			
	<u>21032 0295</u>	LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5	2	☐
	Dimtype: DALI			
	Cutout dimension (mm): 30			
	<u>21032 0305</u>	LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5	2	☐
	Dimtype: DALI			
	Cutout dimension (mm): 30			

les sets pour recouvrement plafond

	<u>204 00 90 ANO</u>	COVERSET R 90 ANO	☐
	<u>204 00 90 B</u>	COVERSET R 90 B	☐
	<u>204 00 90 W</u>	COVERSET R 90 W	☐
	<u>204 00 100 ANO</u>	COVERSET R 100 ANO	☐
	<u>204 00 100 B</u>	COVERSET R 100 B	☐
	<u>204 00 100 W</u>	COVERSET R 100 W	☐

DELTALIGHT

SPY 39 L ON 92720

24136 9220 W

Terminez votre produit

	<u>24144 0020 B</u>	SPY 39 L TUBE B	☐
	<u>24144 0020 FBR</u>	SPY 39 L TUBE FBR	☐
	<u>24144 0020 FG</u>	SPY 39 L TUBE FG	☐
	<u>24144 0020 GC</u>	SPY 39 L TUBE GC	☐
	<u>24144 0020 W</u>	SPY 39 L TUBE W	☐

Notes: