




SPY 52 HE 94020 ADM DIM5

19801 9425 B

AVAILABLE IN  
**BLACK** 19801 9425 B  
**FULL WHITE** 19801 9425 FW  
**WHITE** 19801 9425 W

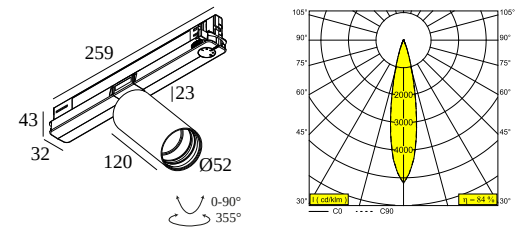

 [View on website](#)



| General info       |                                                      |
|--------------------|------------------------------------------------------|
| LOCATION           | indoor                                               |
| INSTALLATION       | Mains voltage track Mains voltage track mounted      |
| INGRESS PROTECTION | IP20                                                 |
| WEIGHT (KG)        | 0.5                                                  |
| ADJUSTABILITY      | 0° to 90° swiveling, 355° rotatable                  |
| INFORMATION        | LENS FL-20°<br>3F MULTI DIMMABLE POWER ADAPTER 350mA |

| Electrical info |                    |
|-----------------|--------------------|
| ELECTRICAL      | 220-240V / 50-60Hz |
| CLASS           | II                 |
| POWER SUPPLY    | YES                |
| DIM TYPE        | DALI               |
| ENERGY CLASS    | D                  |

| Lightsource info            |                                                |
|-----------------------------|------------------------------------------------|
| LIGHTSOURCE NAME            | LED                                            |
| LIGHTSOURCE                 | LED array 6W / CRI>90 (R9: 60) / 4000K / 975lm |
| TM-30 VALUES                | rf: 96 / Rg: 99                                |
| SDCM                        | SDCM2                                          |
| RISKGROUP                   | RG1                                            |
| LM80                        | L90B10 > 50000                                 |
| BEAMANGLE                   | 20°                                            |
| LED TECHNICS (LIGHT SOURCE) | 975lm // 6W // 163lm/W                         |
| LED TECHNICS (LUMINAIRE)    | 790lm // 6,9W // 114lm/W                       |

| Remarks                   |
|---------------------------|
| High Efficacy : > 100lm/W |

| Requirements                |
|-----------------------------|
| SPY 52 TUBE<br>TRACK 3F DIM |

For detailed installation instructions, please consult the manual : [19801\\_XXX5\\_HAND.pdf](#)

FINISH YOUR SPECIFICATION

Finish your product

|                                                                                  |                       |                 |                          |
|----------------------------------------------------------------------------------|-----------------------|-----------------|--------------------------|
|  | <b>19810 0100 B</b>   | SPY 52 TUBE B   | <input type="checkbox"/> |
|                                                                                  | <b>19810 0100 FBR</b> | SPY 52 TUBE FBR | <input type="checkbox"/> |
|                                                                                  | <b>19810 0100 FG</b>  | SPY 52 TUBE FG  | <input type="checkbox"/> |
|                                                                                  | <b>19810 0100 GC</b>  | SPY 52 TUBE GC  | <input type="checkbox"/> |
|                                                                                  | <b>19810 0100 W</b>   | SPY 52 TUBE W   | <input type="checkbox"/> |

COMPATIBLE TRACKS

| TRACK 3F DIM H    |                    |        |        | Available Colours                                                                                                                                                                                                                                                 |
|-------------------|--------------------|--------|--------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>200 14 410</b> | TRACK 3F DIM H 1m  | 1000 m | 1.6 kg |                                                                                         |
| <b>200 14 420</b> | TRACK 3F DIM H 2m  | 2000 m | 3.2 kg |                                                                                         |
| <b>200 14 430</b> | TRACK 3F DIM H 3m  | 3000 m | 4.8 kg |                                                                                         |
| TRACK 3F DIM IN   |                    |        |        | Available Colours                                                                                                                                                                                                                                                 |
| <b>200 13 410</b> | TRACK 3F DIM IN 1m | 1000 m | 1.2 kg |                                                                                         |
| <b>200 13 420</b> | TRACK 3F DIM IN 2m | 2000 m | 2.4 kg |                                                                                         |
| <b>200 13 430</b> | TRACK 3F DIM IN 3m | 3000 m | 3.5 kg |                                                                                         |
| TRACK 3F DIM ON   |                    |        |        | Available Colours                                                                                                                                                                                                                                                 |
| <b>200 12 410</b> | TRACK 3F DIM ON 1m | 1000 m | 1.1 kg |    |
| <b>200 12 420</b> | TRACK 3F DIM ON 2m | 2000 m | 2.1 kg |    |
| <b>200 12 430</b> | TRACK 3F DIM ON 3m | 3000 m | 3.1 kg |    |

# DELTALIGHT

## SPY 52 HE 94020 ADM DIM5

19801 9425 B

Notes: