




FRAGMA L SUPERSPOT 9408 ADM
DIM5

23616 9415 W

AVAILABLE IN
BLACK 23616 9415 B
WHITE 23616 9415 W

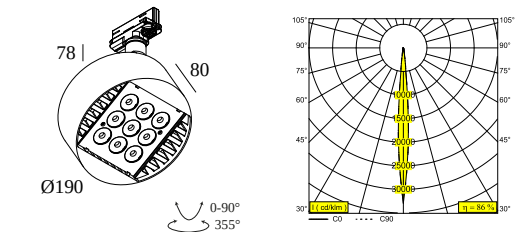

[View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Mains voltage track Mains voltage track mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	1.9
ADJUSTABILITY	0° to 90° swiveling, 355° rotatable
INFORMATION	9 x LENS SP-8° INCL.DIMMABLE LED POWER SUPPLY 900mA-DC 3F MULTI ADAPTER
Electrical info	
ELECTRICAL	220-240V / 50-60Hz
CLASS	I
POWER SUPPLY	YES
DIM TYPE	DALI
ENERGY CLASS	D
CERTIFICATES	CB, ENEC, RCM
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED cluster 23,4W / CRI>90 (R9: 64) / 4000K / 2889lm
TM-30 VALUES	Rf: 91 / Rg: 100
SDCM	SDCM3
RISKGROUP	RG2
LM80	L80 > 150000
BEAMANGLE	8°
LED TECHNICS (LIGHT SOURCE)	2889lm // 23,4W // 123lm/W
LED TECHNICS (LUMINAIRE)	2498lm // 26,9W // 93lm/W

Requirements
TRACK 3F DIM

Accessories
FRAGMA 4X4 HONEYCOMB


For detailed installation instructions, please consult the manual : [23616_XXX5_HAND.pdf](#)

FRAGMA L SUPERSPOT 9408 ADM DIM5

23616 9415 W

FINISH YOUR SPECIFICATION

Light altering devices



23613 0220 B FRAGMA L HONEYCOMB B



COMPATIBLE TRACKS

TRACK 3F DIM H			Available Colours
200 14 410	TRACK 3F DIM H 1m	1000 m 1.6 kg	
200 14 420	TRACK 3F DIM H 2m	2000 m 3.2 kg	
200 14 430	TRACK 3F DIM H 3m	3000 m 4.8 kg	
TRACK 3F DIM IN			Available Colours
200 13 410	TRACK 3F DIM IN 1m	1000 m 1.2 kg	
200 13 420	TRACK 3F DIM IN 2m	2000 m 2.4 kg	
200 13 430	TRACK 3F DIM IN 3m	3000 m 3.5 kg	
TRACK 3F DIM ON			Available Colours
200 12 410	TRACK 3F DIM ON 1m	1000 m 1.1 kg	
200 12 420	TRACK 3F DIM ON 2m	2000 m 2.1 kg	
200 12 430	TRACK 3F DIM ON 3m	3000 m 3.1 kg	

Notes: