



SRL 70S - PROFILE

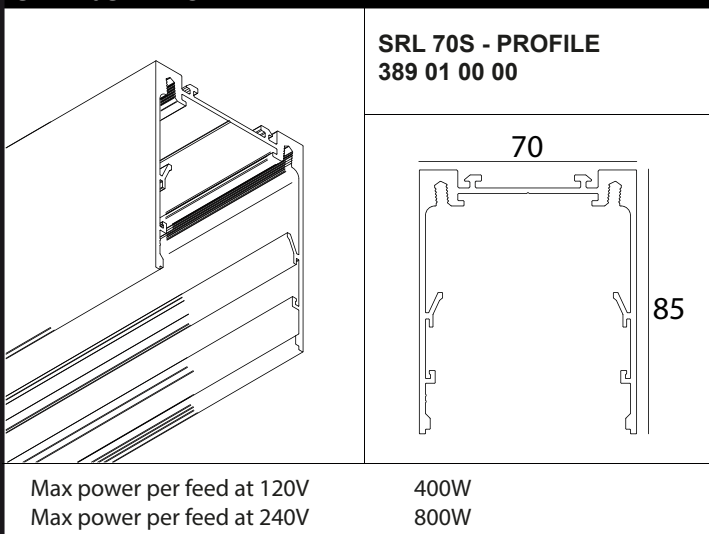


SRL 70 S - PROFILE

SRL 70 - WALL FIXATION
389 01 06 10

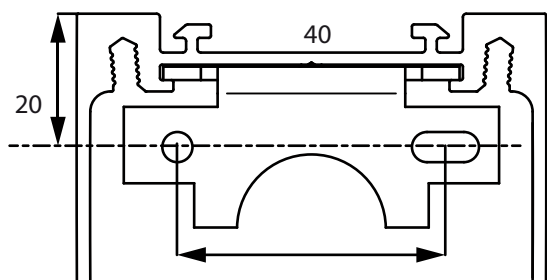

FIXATION


1

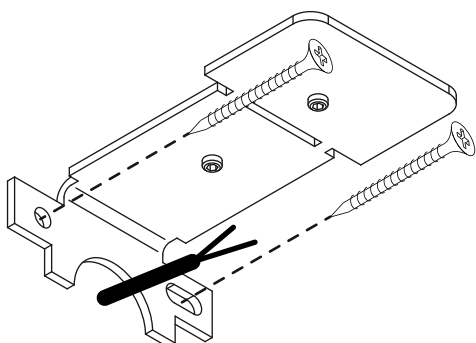

STREAMLINER 70S PROFILE


DEEL
PARTIE
TEIL
PART
PARTE
PARTE


A

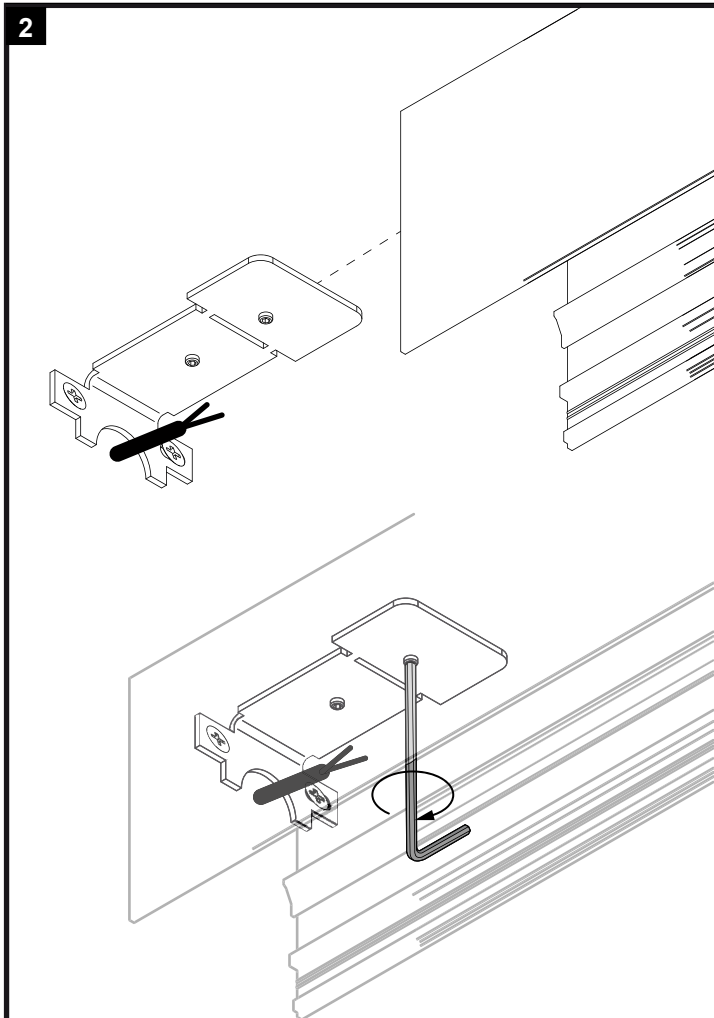

SRL 70 S - PROFILE



SRL 70 - CEILING FIXATION

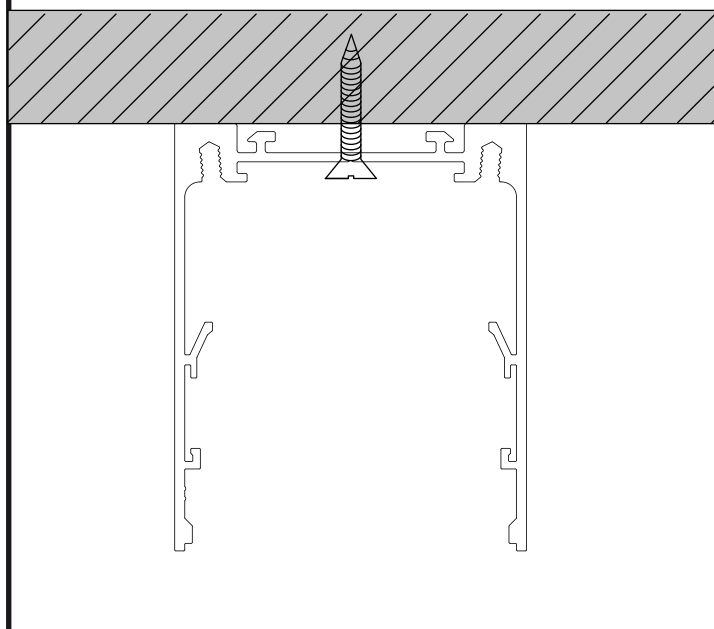

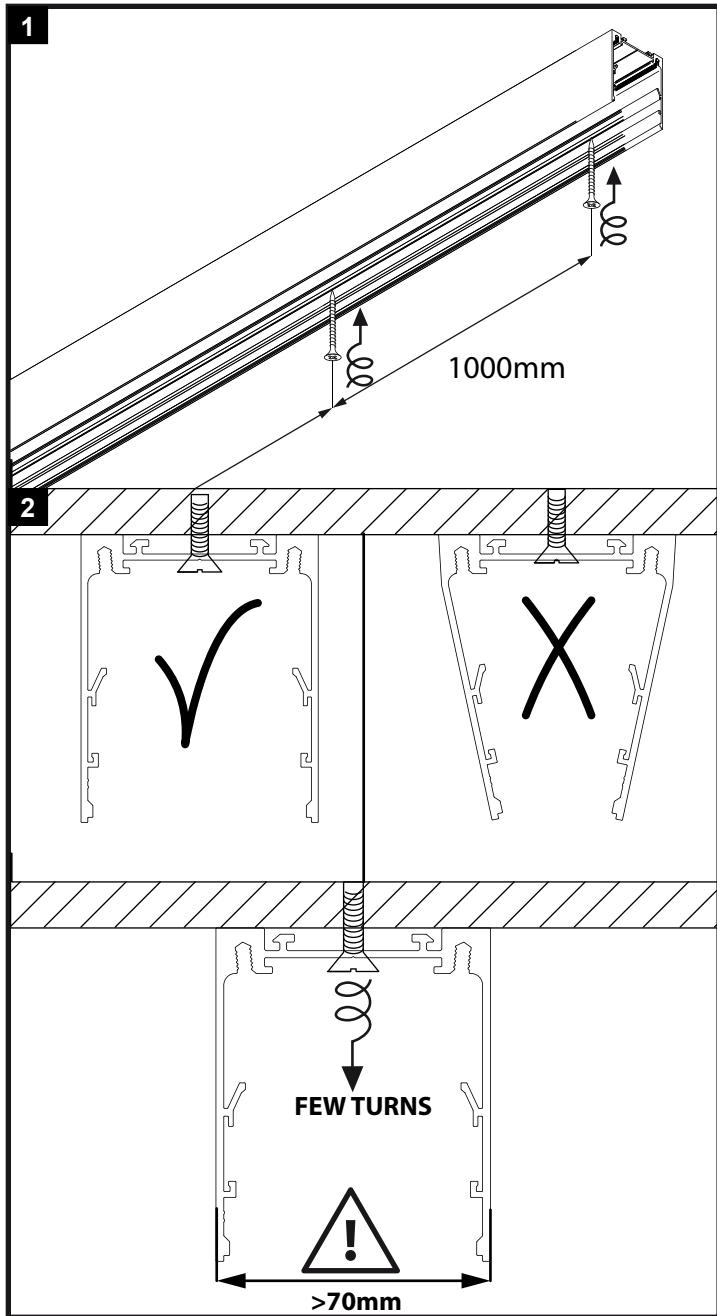




SRL 70 S - PROFILE

SRL 70 - SUSPENSION 20 SINGLE
377 20 21 (1,6m)
377 20 26 (6m)

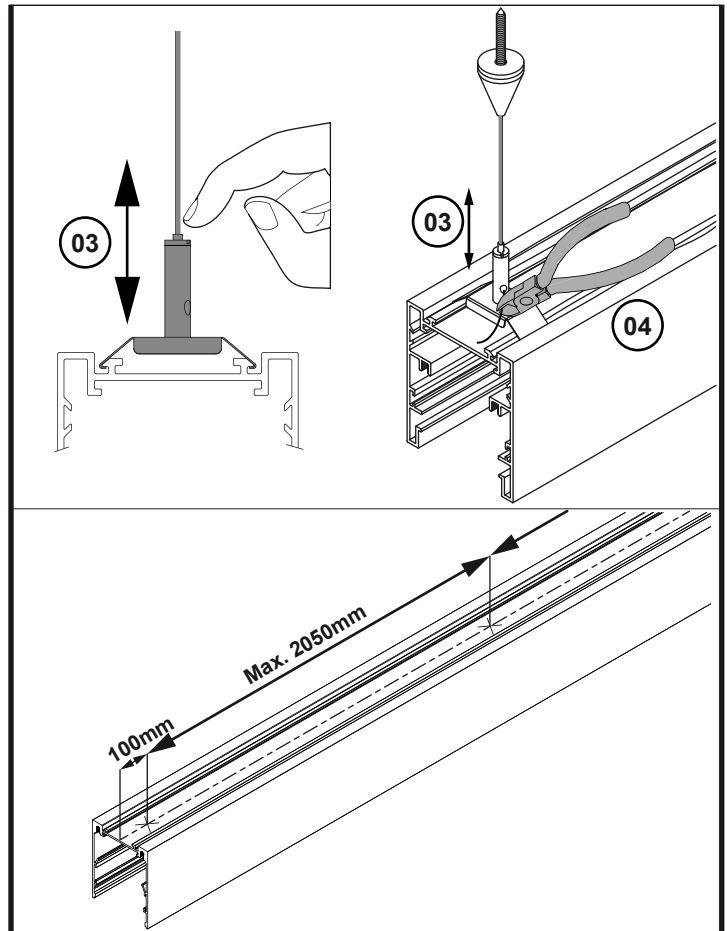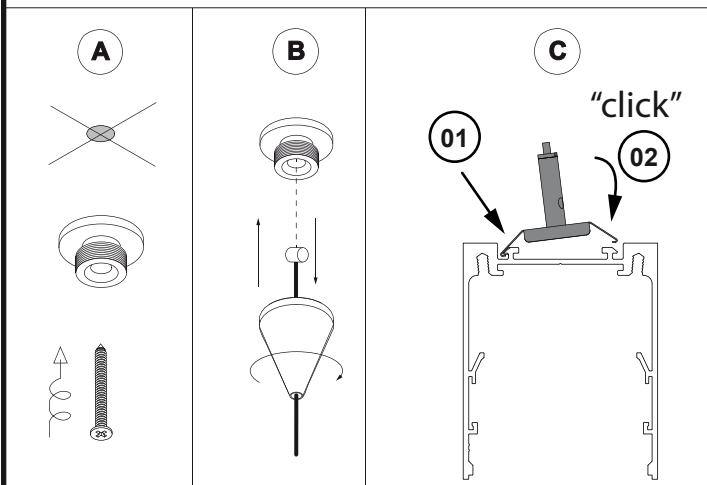

SRL 70S - END CAP

SRL 70S - END CAP
389 01 03 01

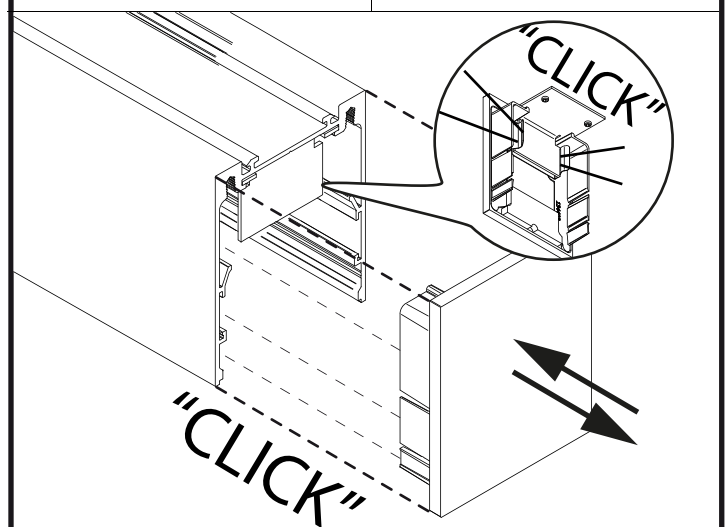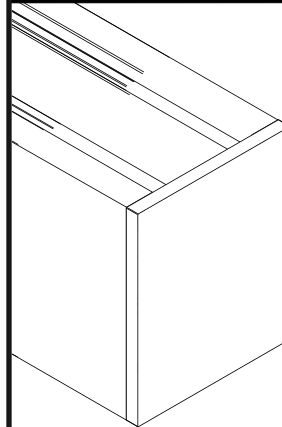

SRL 70S - ELECTRICAL CONNECTION

CURRENT SUPPLY

377 98 51 (1,6m / 3 x 0.75mm²)

377 98 56 (6m / 3 x 0.75mm²)

377 99 51 (1,6m / 5 x 0.75mm²)

377 99 56 (6m / 5 x 0.75mm²)

ACCESSORY SET

1X




Ø9,5


01



02

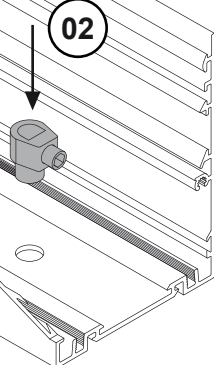

04



03



04




05 230-240V

PUSH

PUSH

H07 V-U 1-2,5mm²

05

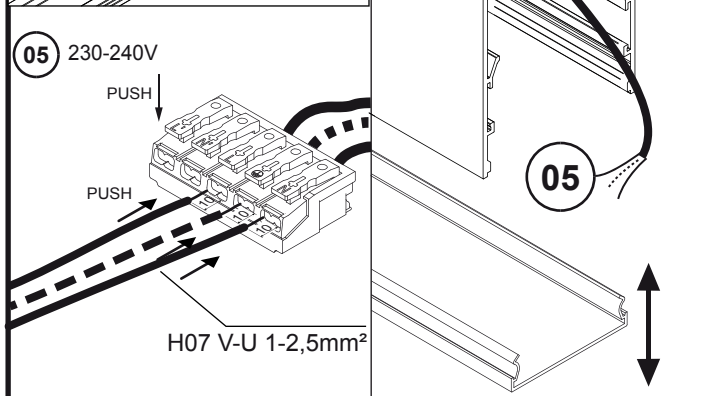

SRL 70S - CORNER 180°

SRL 70 - CORNER 180°

389 01 06 01



ACCESSORY SET

DIN911/2

1X

2X

1X

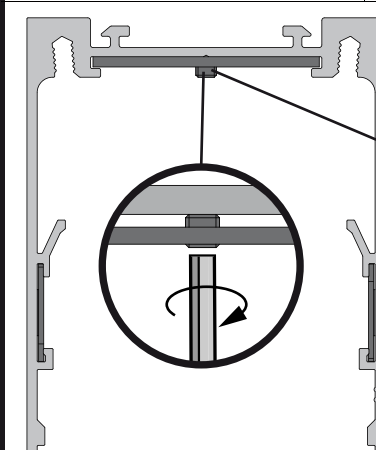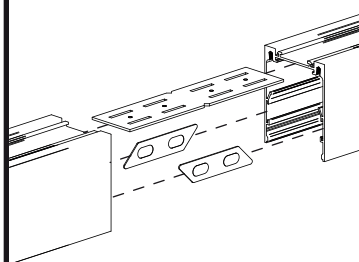

SRL 70S - CORNER 90°

SRL 70 - CORNER 90°

389 01 06 06



ACCESSORY SET

DIN911/2

1X


1X

2X

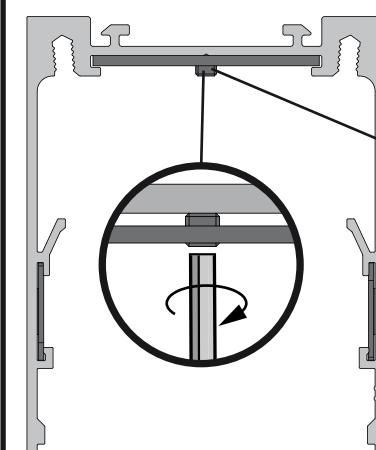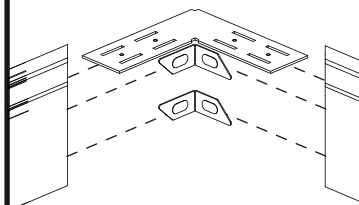

SRL 70S - LED ARRAY DOWN

WATT	L (mm)		DIM 1-10V	DIM DALI SWITCH
1 x 12	560	389 610 12 E	389 610 12 ED1	389 610 12 ED2
1 x 18	840	389 610 18 E	389 610 18 ED1	389 610 18 ED2
1 x 24	1120	389 610 24 E	389 610 24 ED1	389 610 24 ED2
1 x 30	1400	389 610 30 E	389 610 30 ED1	389 610 30 ED2
1 x 36	1680	389 610 36 E	389 610 36 ED1	389 610 36 ED2
1 x 48	2240	389 610 48 E	389 610 48 ED1	389 610 48 ED2





REQUIRED

SRL - PC SBL PROFILE
389 02 05 SBL
OR
SRL - PC PRISMATIC
PROFILE
389 02 06 PR


Max. L / PROFILE :
5,8m - 0,2 / m

220-240V | 50/60Hz

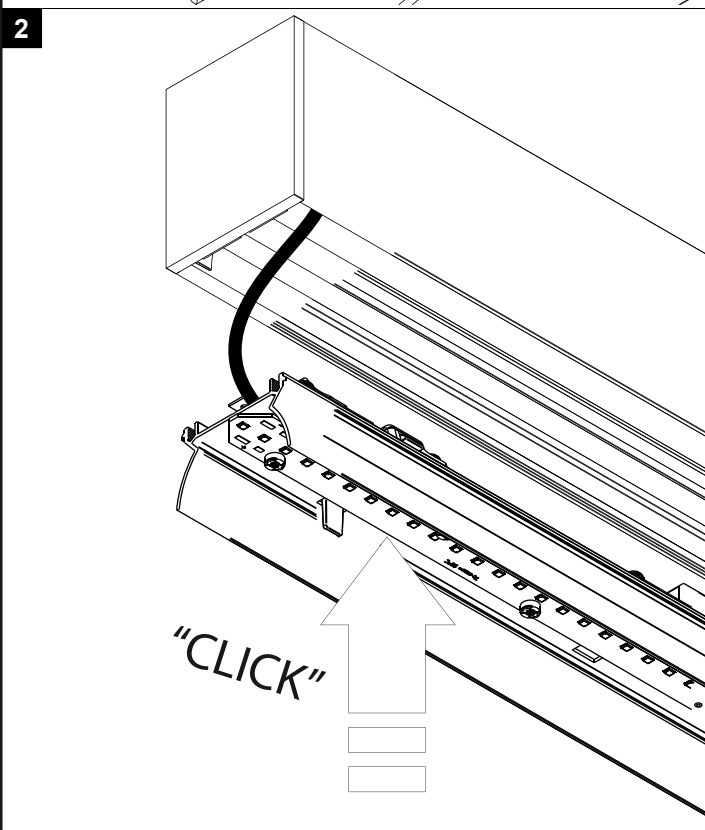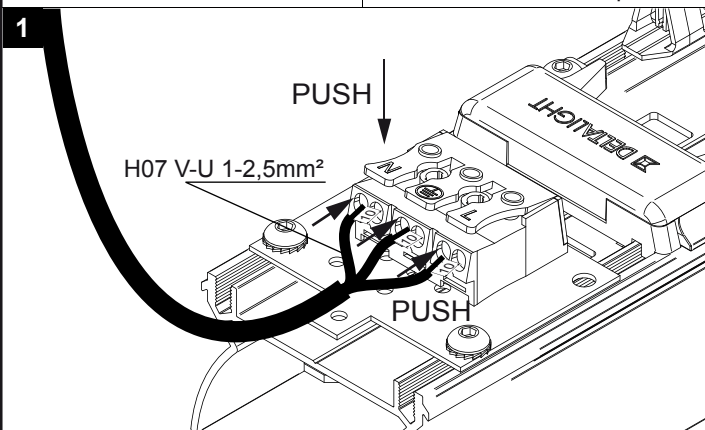

SRL 70S - LED ARRAY DOWN HE

WATT	L (mm)	
1 x 6	560	389 613 06 E
1 x 9	840	389 613 09 E
1 x 12	1120	389 613 12 E
1 x 15	1400	389 613 15 E
1 x 18	1680	389 613 18 E
1 x 24	2240	389 613 24 E





REQUIRED

SRL - PC SBL PROFILE
389 02 05 SBL
OR
SRL - PC PRISMATIC
PROFILE
389 02 06 PR


Max. L / PROFILE :
5,8m - 0,2 / m

220-240V | 50/60Hz

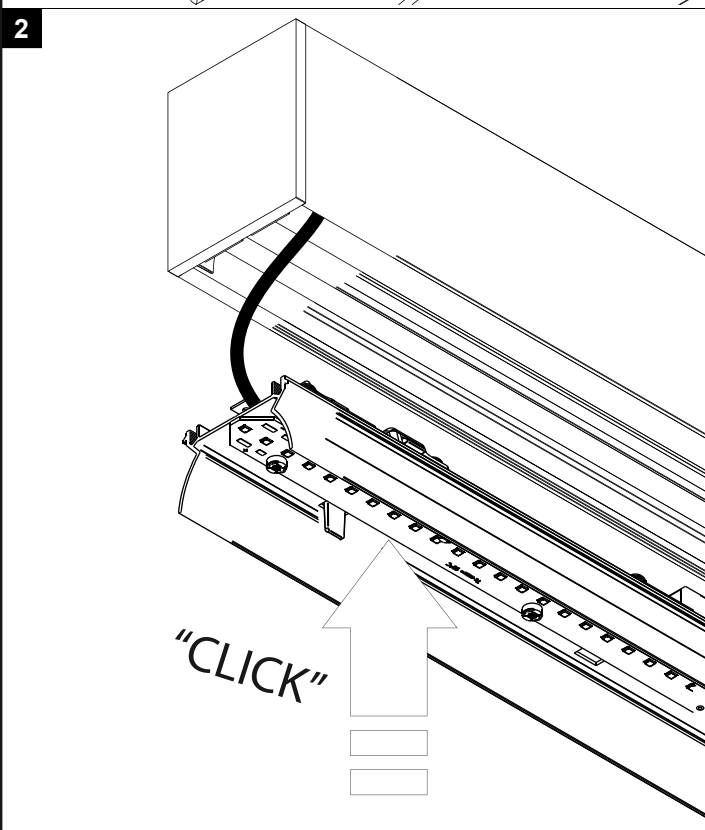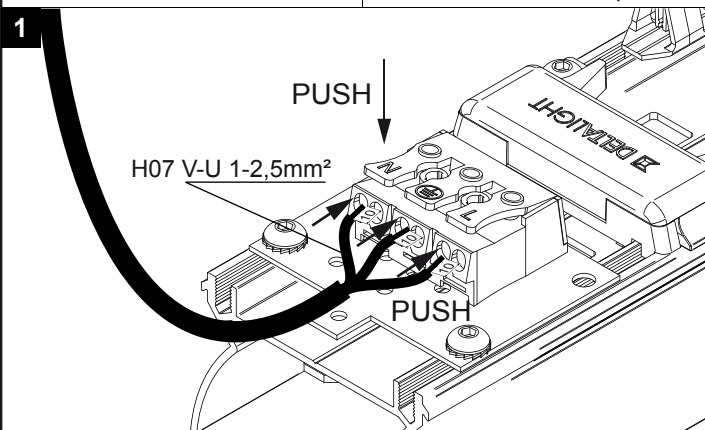

SRL 70S - LED ARRAY CORNER DOWN



WATT	L (mm)		DIM 1-10V	DIM DALI SWITCH
2 x 12	563	389 610 212 E	389 610 212 ED1	389 610 212 ED2

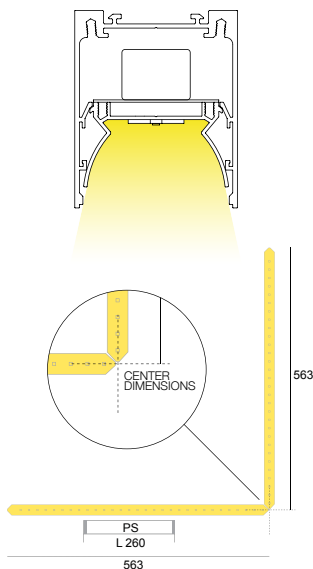

REQUIRED


SRL - PC SBL PROFILE
389 02 05 SBL
OR
SRL - PC PRISMATIC
PROFILE
389 02 06 PR

Max. L / PROFILE :
5,8m - 0,2 / m

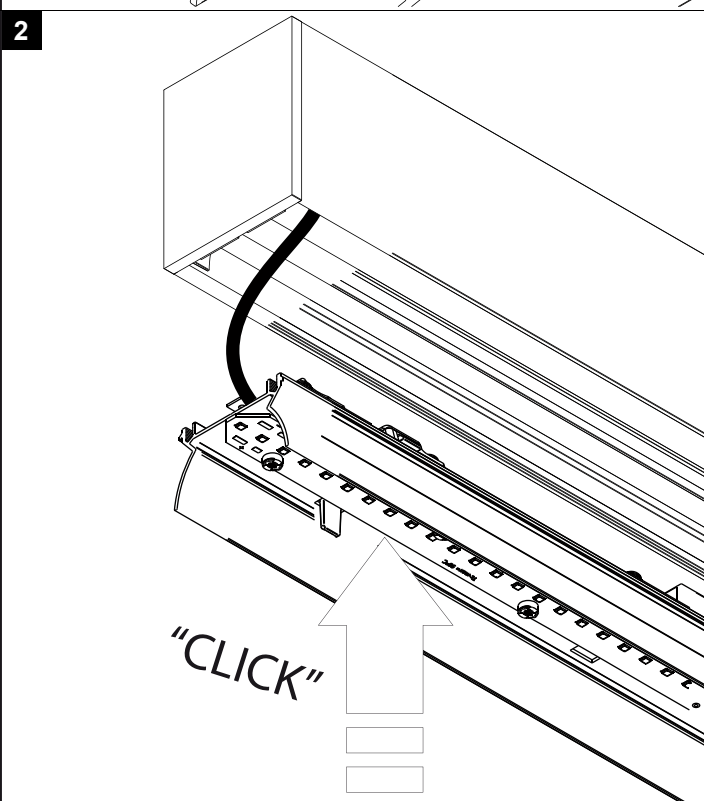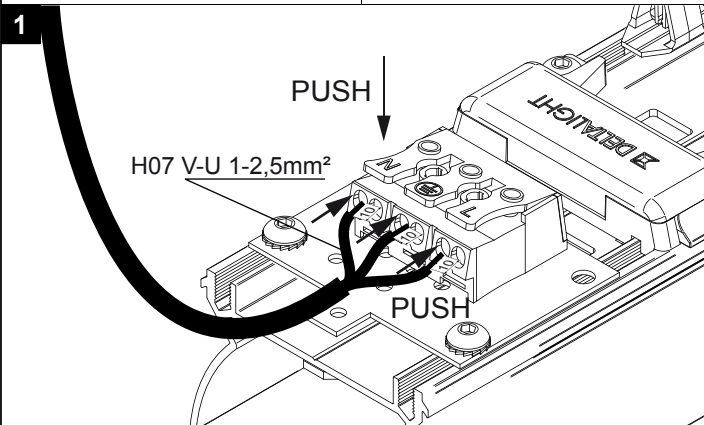

SRL 70S - LED ARRAY CORNER DOWN HE



WATT	L (mm)	
2 x 6	563	389 613 206 E

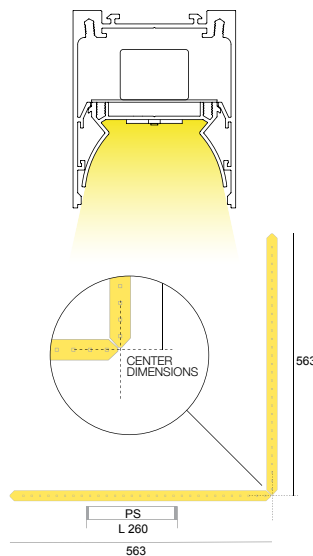

REQUIRED


SRL - PC SBL PROFILE
389 02 05 SBL
OR
SRL - PC PRISMATIC
PROFILE
389 02 06 PR

Max. L / PROFILE :
5,8m - 0,2 / m

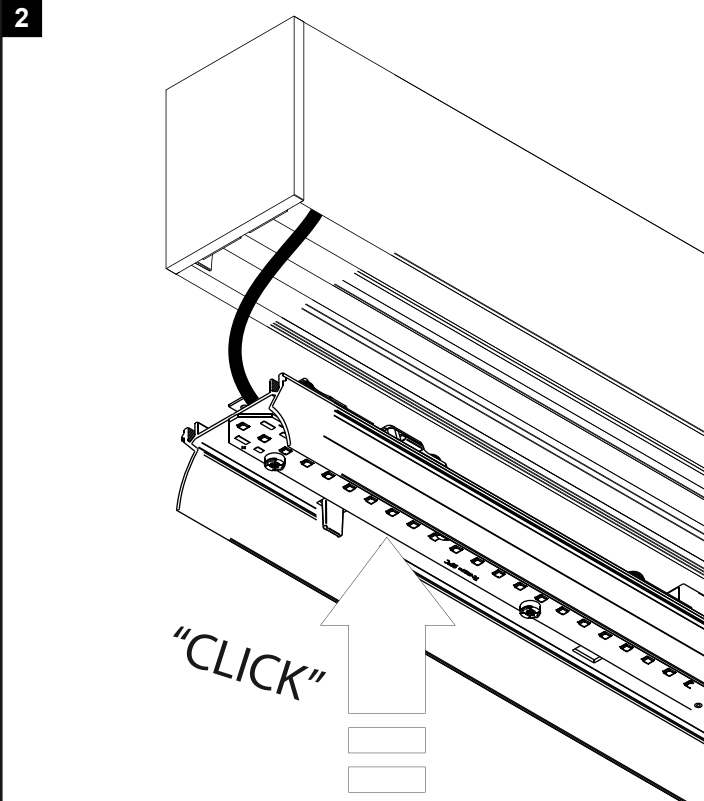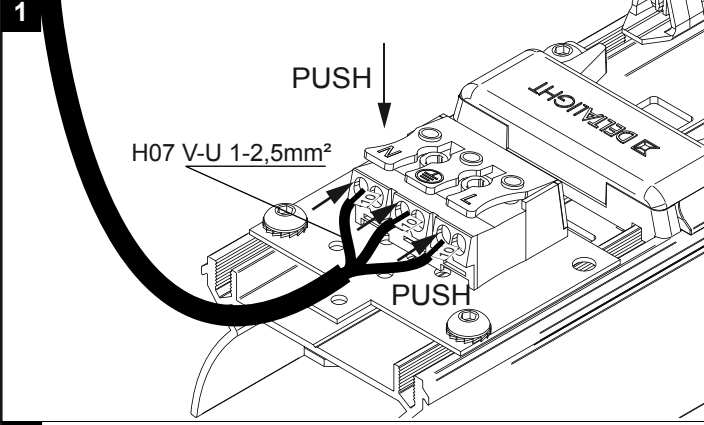

SRL 70S - LED ARRAY DOWN HE + EMERGENCY UNIT

WATT	L (mm)	
1 x 12	1120	389 613 12 E EM1



REQUIRED



SRL - PC SBL PROFILE
389 02 05 SBL

OR

SRL - PC PRISMATIC PROFILE
389 02 06 PR


Max. L / PROFILE :
5,8m - 0,2 / m

220-240V | 50/60Hz

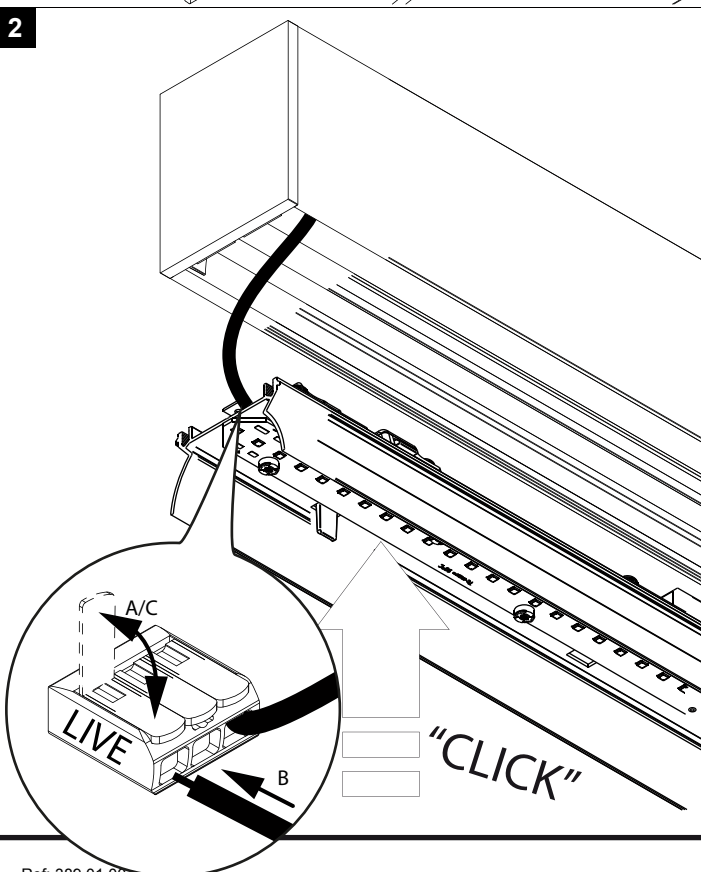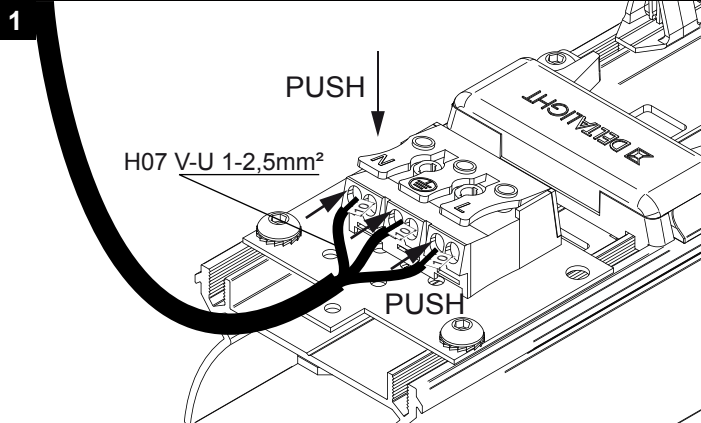


Ref. 389 01 00 00


REMOVAL OF A SRL 70S - LED ARRAY

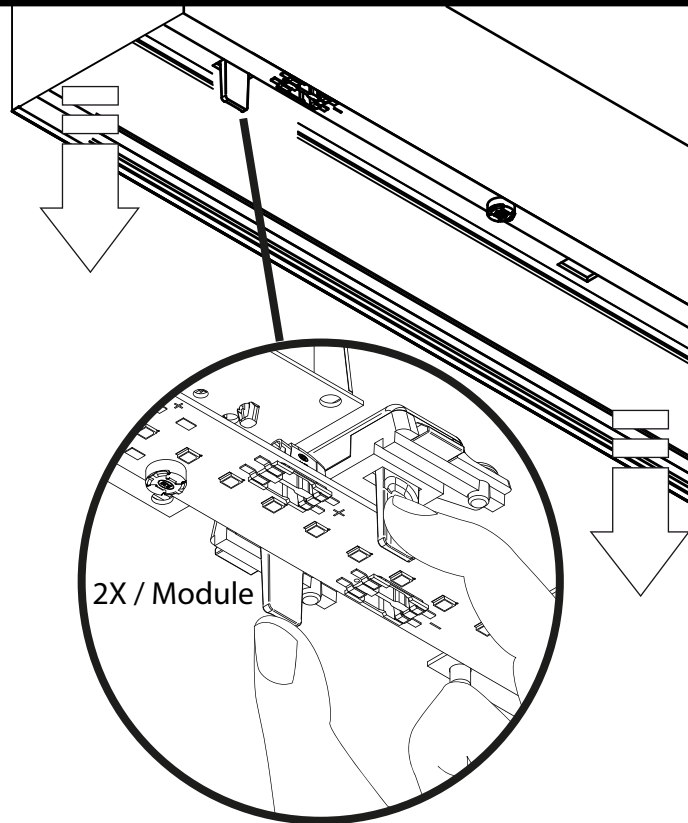

REMOVAL OF A SRL 70S - LED ARRAY

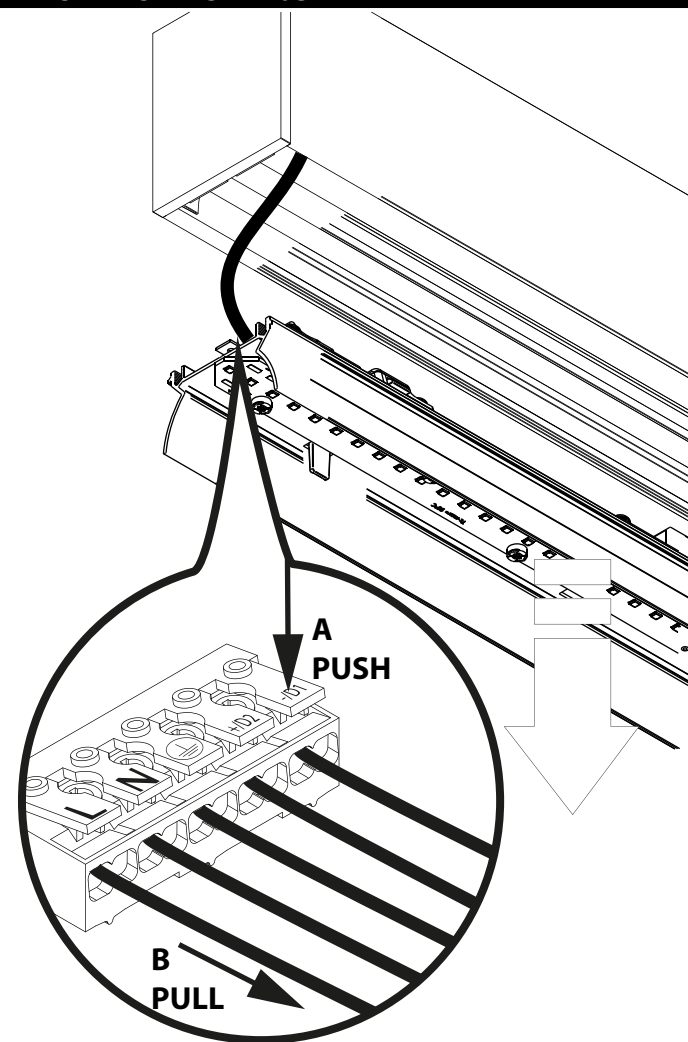

MIDISPY M10



MIDISPY M10
M10 241 933
M10 241 923

REQUIRED

MIDISPY TUBE

414 03 00

ACCESSORY SET




IP20

Beschermtd tegen vaste voorwerpen die groter zijn dan 12 mm
Protégé contre les objets solides de plus de 12 mm
Geschützt gegen Festkörper größer als 12 mm
Protected against solid objects greater than 12 mm
Protegido contra objetos sólidos superiores a 12 mm
Protetto contro oggetti solidi più grandi di 12 mm

Enkel geschikt voor toestellen op zeer lage spanning (minder dan 50 V-AC / 120 V-DC)
Convient uniquement pour les produits à très basse tension (moins de 50 V-AC / 120 V-DC)
Geeignet für Güter mit sehr niedriger Spannung (unter 50 V-AC / 120 V-DC)
Only suited for goods at very low voltage (below 50 V-AC / 120 V-DC)
Se recomienda únicamente para aquellos productos de tensión muy baja (menos de 50 V-AC / 120 V-DC)
Vale unicamente per i prodotti a tensione molto bassa (inferiore a 50 V-AC / 120 V-DC)


1




CLICK!

REQUIREMENTS
MIDISPY TUBE
414 03 00

2

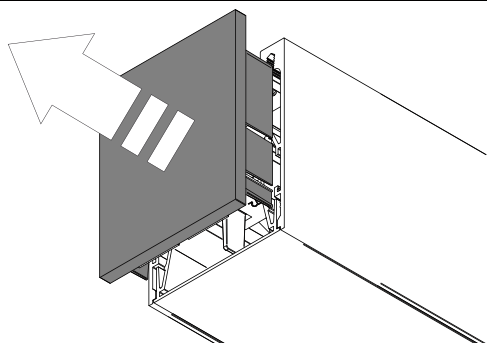


3

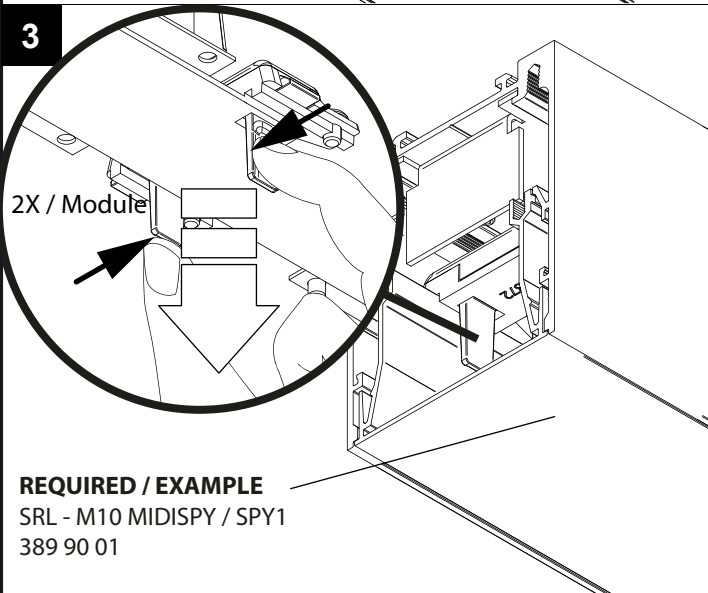


REQUIRED / EXAMPLE
SRL - M10 MIDISPY / SPY1
389 90 01


4

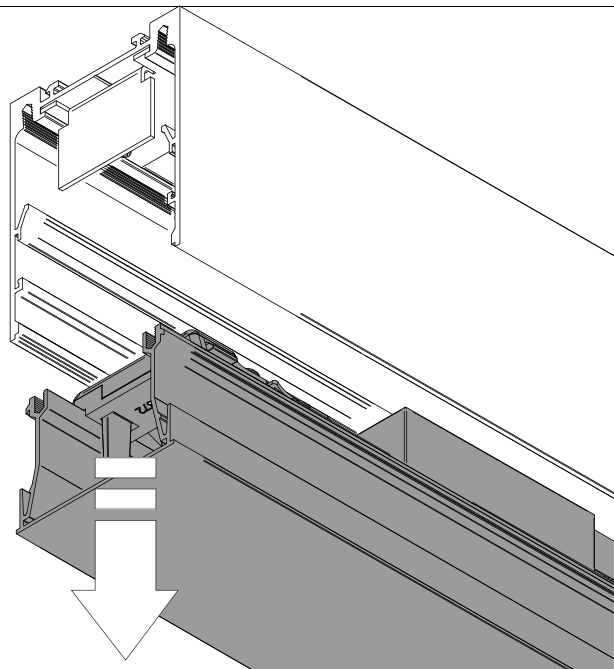


5

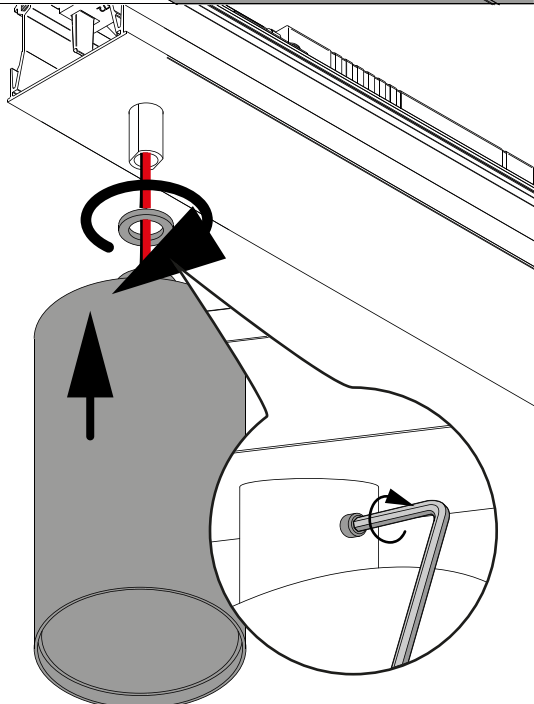


6

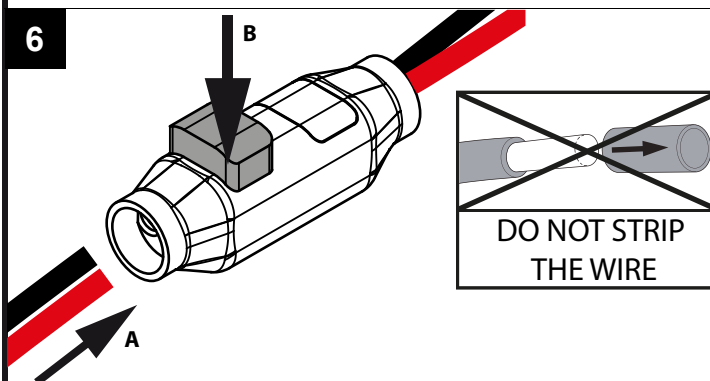


ELECTRICAL CONNECTION

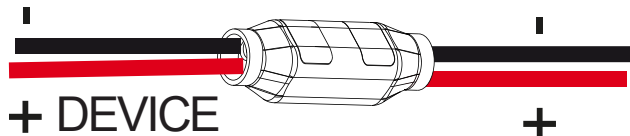


7

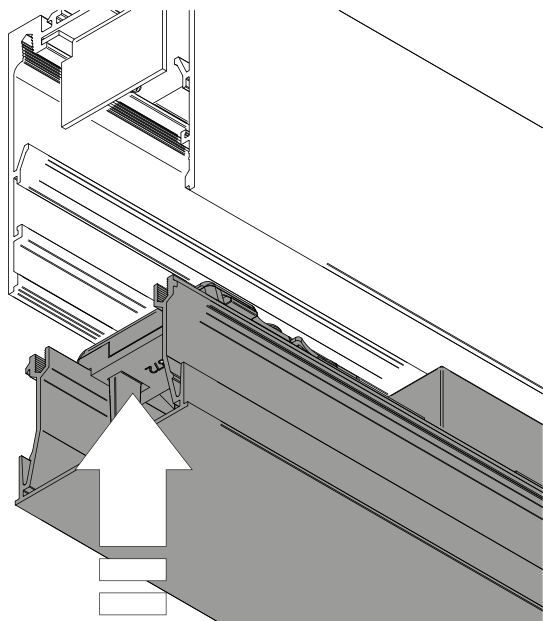


8

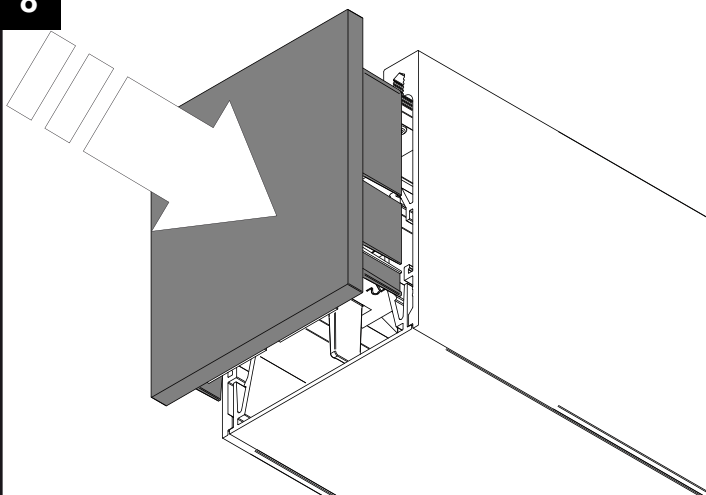

9

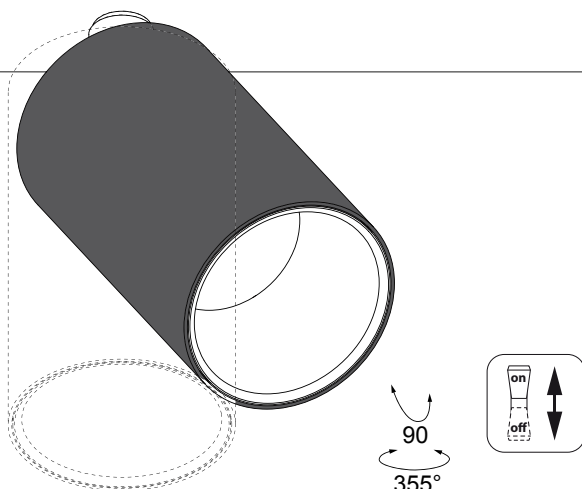

SPY M10




SPY M10
M10 341 81931
M10 341 81932
M10 341 81921
M10 341 81922

REQUIRED

SPY TUBE 414 01 00

ACCESSORIES

HONEYCOMB 50 413 03 01
LINEAR SPREAD
LENS 50 413 03 02
SPREAD LENS 50 413 03 03
SOFTENING LENS 50 413 03 04
GLASS SBL 50 413 03 05




IP20


Beschermtd tegen vaste voorwerpen die groter zijn dan 12 mm
Protégé contre les objets solides de plus de 12 mm
Geschützt gegen Festkörper größer als 12 mm
Protected against solid objects greater than 12 mm
Protegido contra objetos sólidos superiores a 12 mm
Protetto contro oggetti solidi più grandi di 12 mm

Enkel geschikt voor toestellen op zeer lage spanning (minder dan 50 V-AC / 120 V-DC)
Convient uniquement pour les produits à très basse tension (moins de 50 V-AC / 120 V-DC)
Geeignet für Güter mit sehr niedriger Spannung (unter 50 V-AC / 120 V-DC)
Only suited for goods at very low voltage (below 50 V-AC / 120 V-DC)
Se recomienda únicamente para aquellos productos de tensión muy baja (menos de 50 V-AC / 120 V-DC)
Vale unicamente per i prodotti a tensione molto bassa (inferiore a 50 V-AC / 120 V-DC)


1


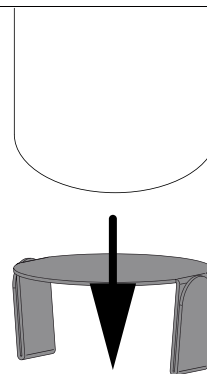


2

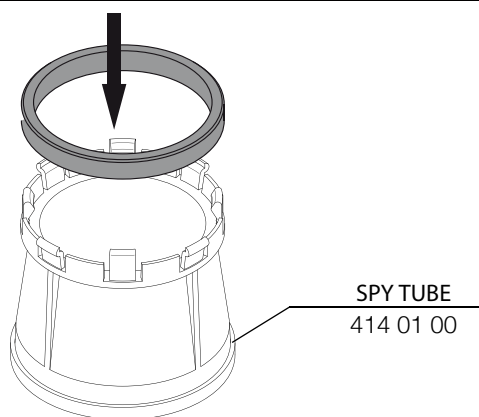


3

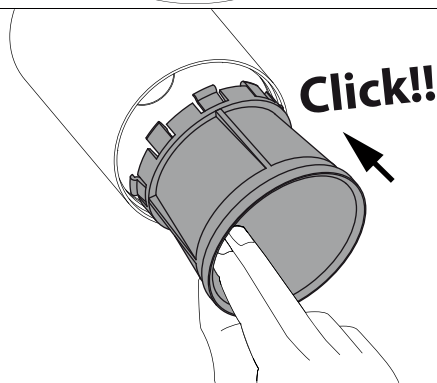


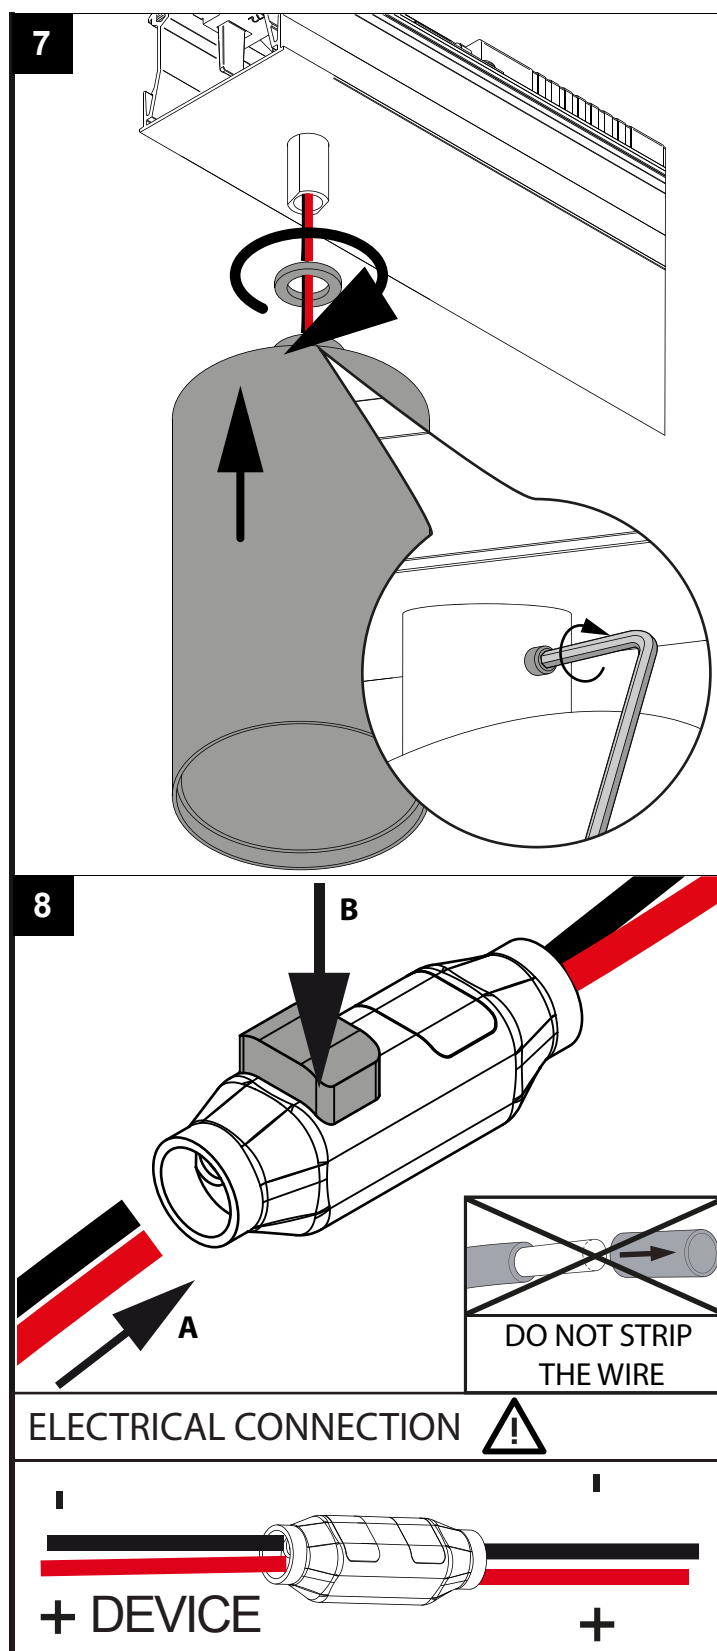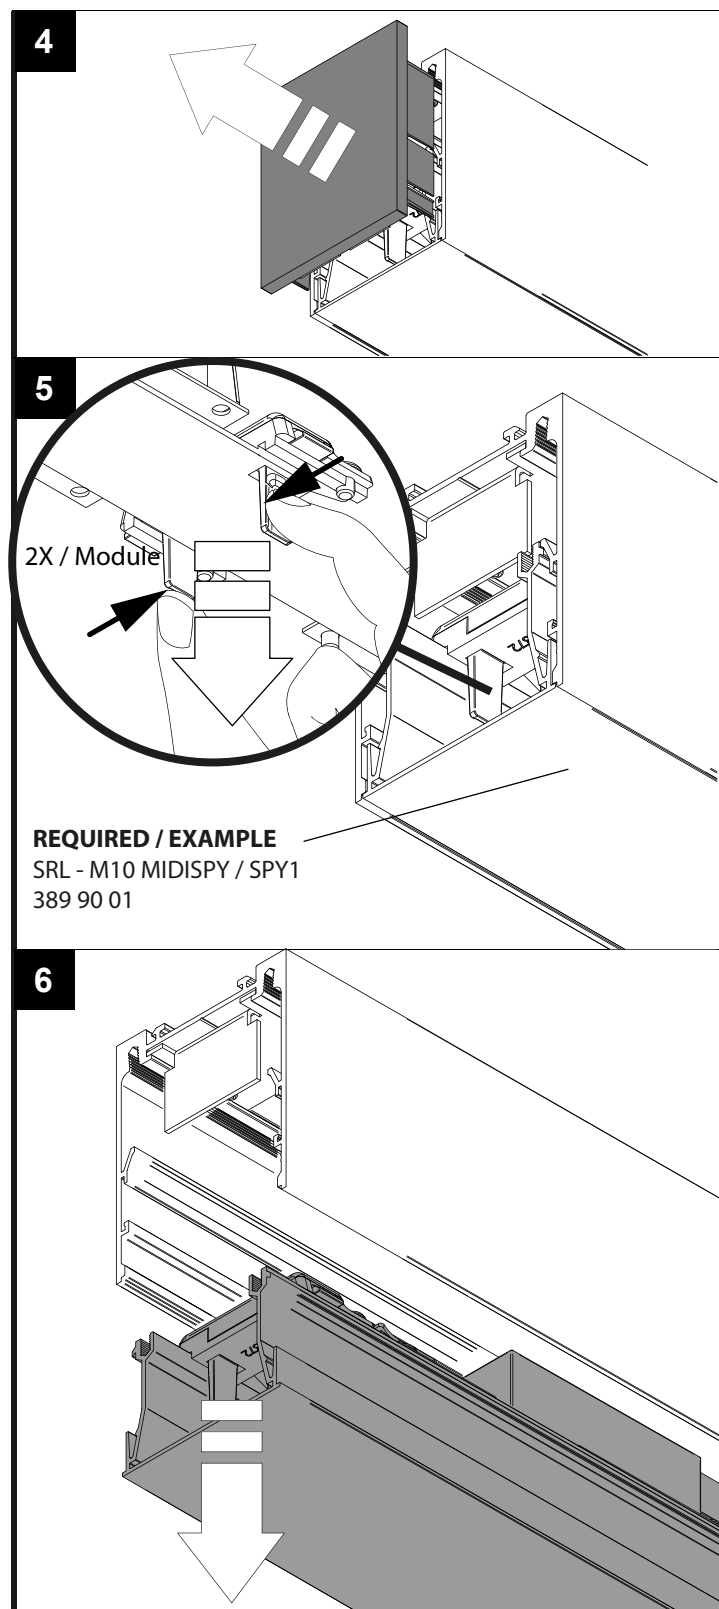



9

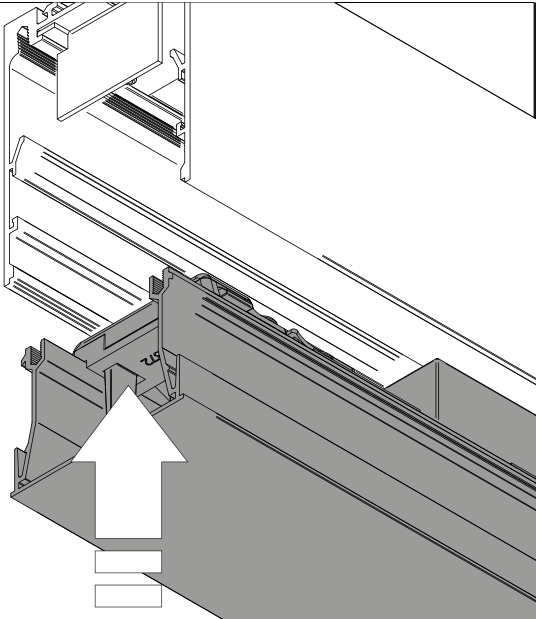

10

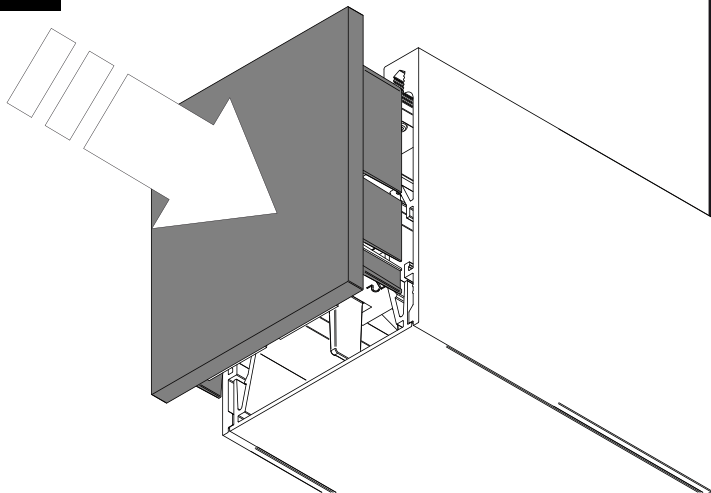


11

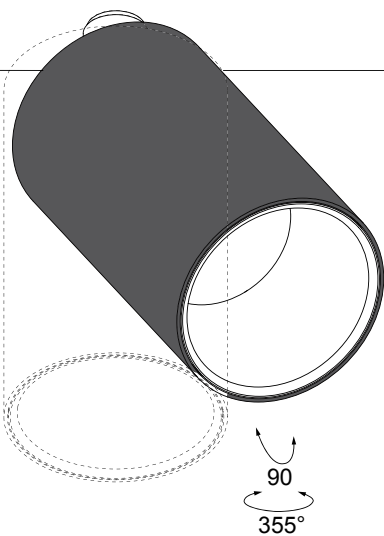


ACCESSORIES


1

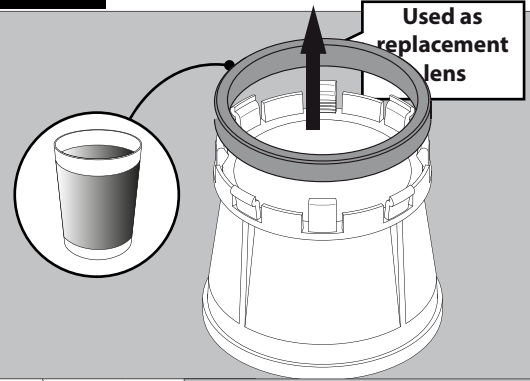


2

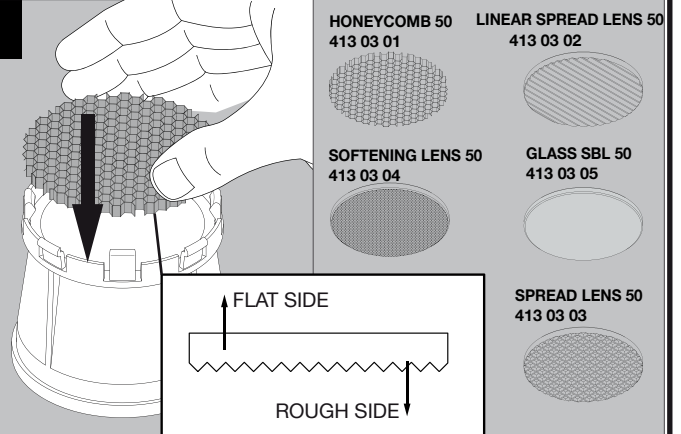

3

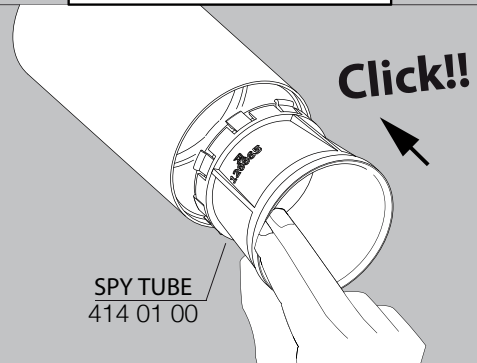

SPY HP M10



SPY HP M10
M10 341 21 931
M10 341 21 921

REQUIRED

SPY TUBE 414 01 00

ACCESSORIES

HONEYCOMB 50 413 03 01
LINEAR SPREAD LENS 50 413 03 02
SPREAD LENS 50 413 03 03
SOFTENING LENS 50 413 03 04
GLASS SBL 50 413 03 05



IP20

Beschermtd tegen vaste voorwerpen die groter zijn dan 12 mm
Protégé contre les objets solides de plus de 12 mm
Geschützt gegen Festkörper größer als 12 mm
Protected against solid objects greater than 12 mm
Protegido contra objetos sólidos superiores a 12 mm
Protetto contro oggetti solidi più grandi di 12 mm




Enkel geschikt voor toestellen op zeer lage spanning (minder dan 50 V-AC / 120 V-DC)
Convient uniquement pour les produits à très basse tension (moins de 50 V-AC / 120 V-DC)
Geeignet für Güter mit sehr niedriger Spannung (unter 50 V-AC / 120 V-DC)
Only suited for goods at very low voltage (below 50 V-AC / 120 V-DC)
Se recomienda únicamente para aquellos productos de tensión muy baja (menos de 50 V-AC / 120 V-DC)
Vale unicamente per i prodotti a tensione molto bassa (inferiore a 50 V-AC / 120 V-DC)




Opgepast warm oppervlak - niet aanraken - buiten bereik installeren
Attention surface de contact chaude - ne pas toucher - installer hors d'atteinte
Achtung heiße Oberfläche - Nicht Berühren - Nur unerreichbar installieren
Caution hot surface - do not touch - install out of reach
Precaución alta temperatura de la superficie - no tocar - instalar fuera de alcance
Attenzione superficie calda - non toccare - installare in luogo non accessibile

1

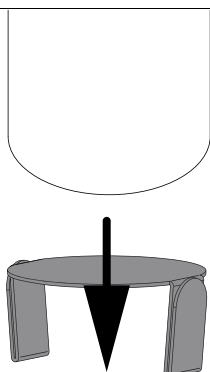

2

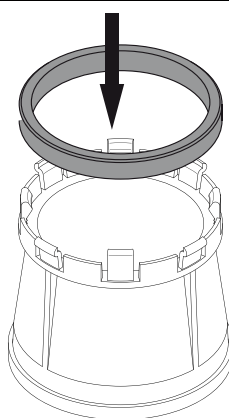


SPY TUBE
414 01 00


3



4

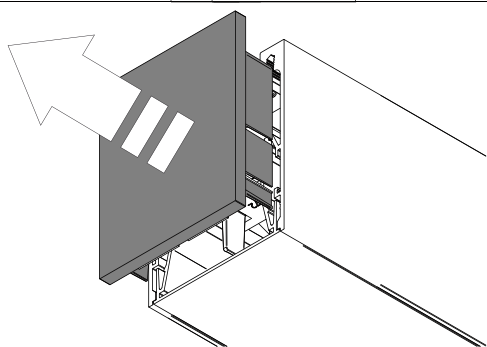


5

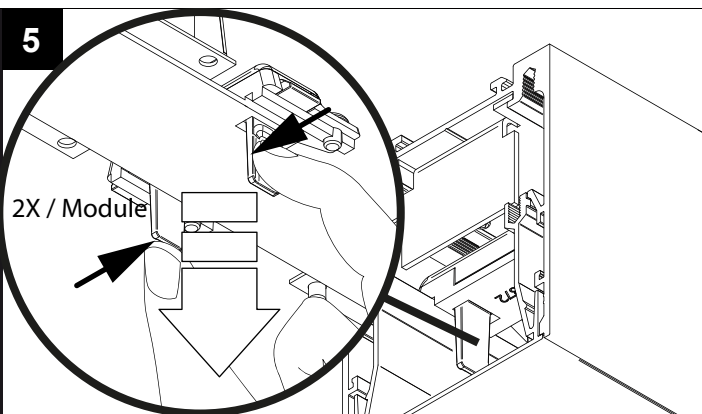


REQUIRED / EXAMPLE
SRL - M10 SPY HP 1
389 91 01


6

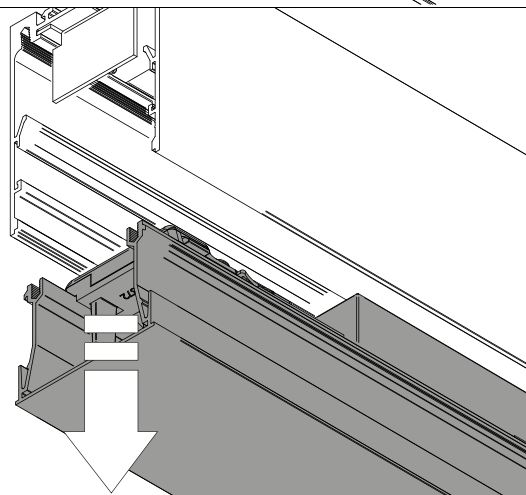


7

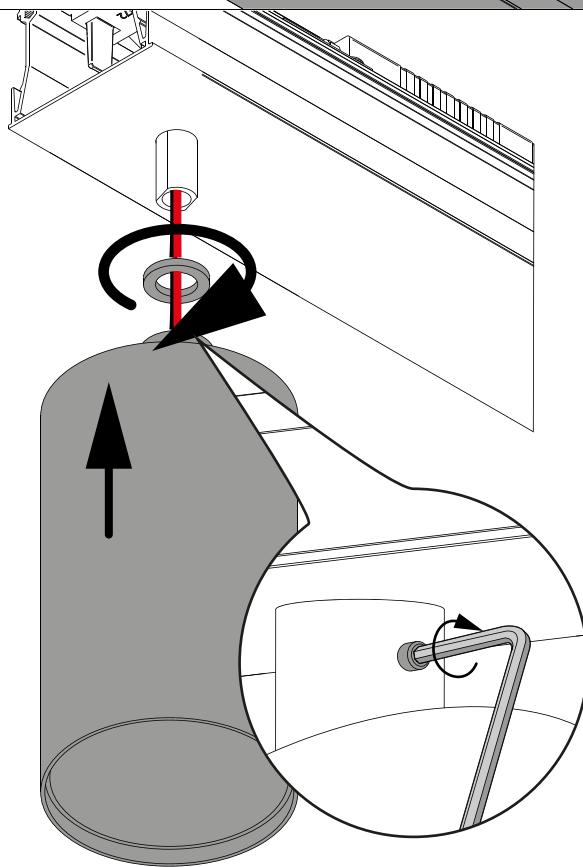


8

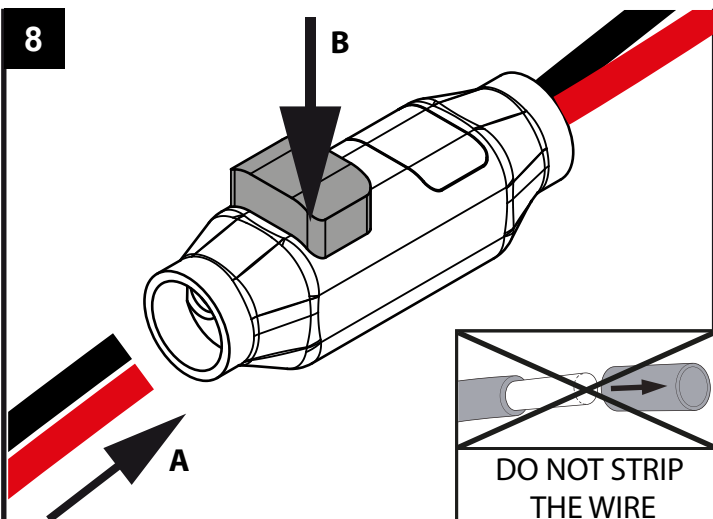


ELECTRICAL CONNECTION

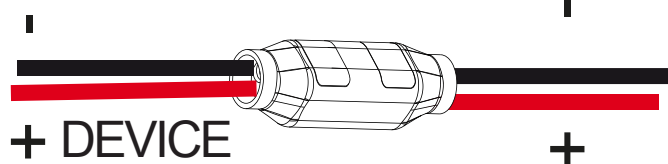


9

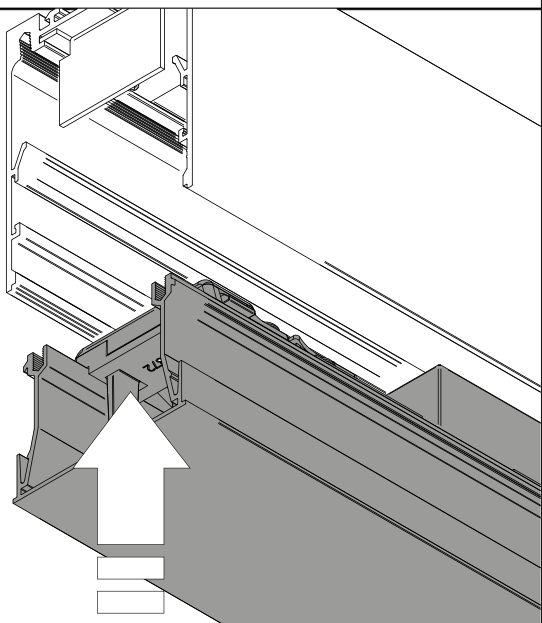

10

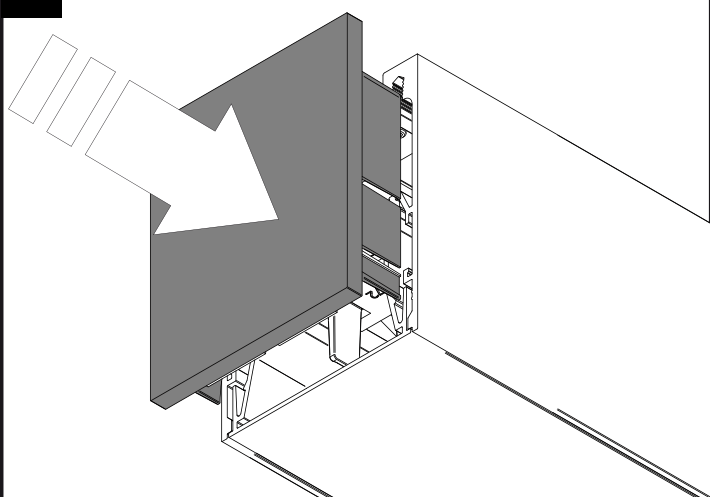


11

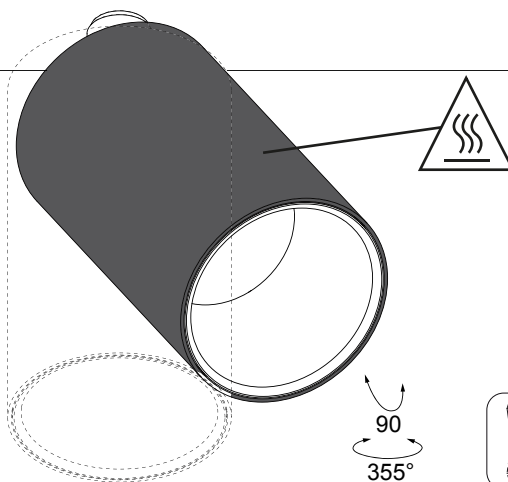


ACCESSORIES


1

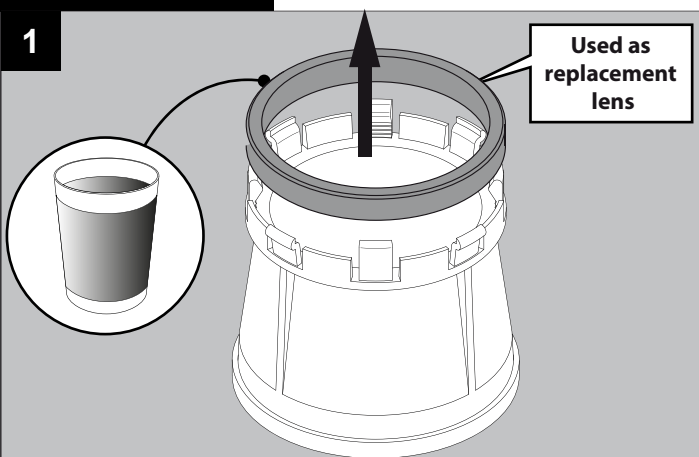

2

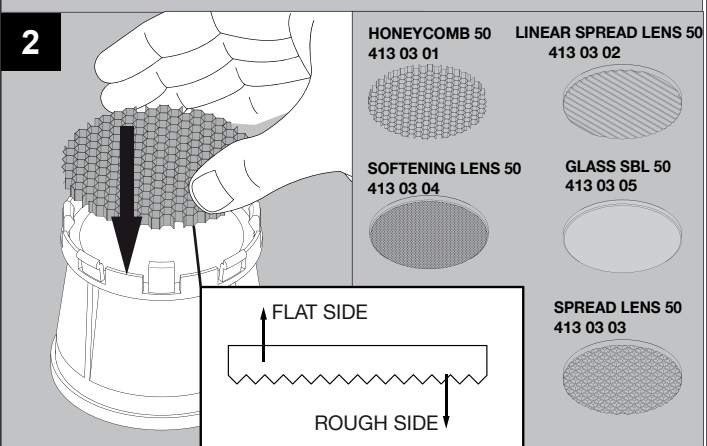


3

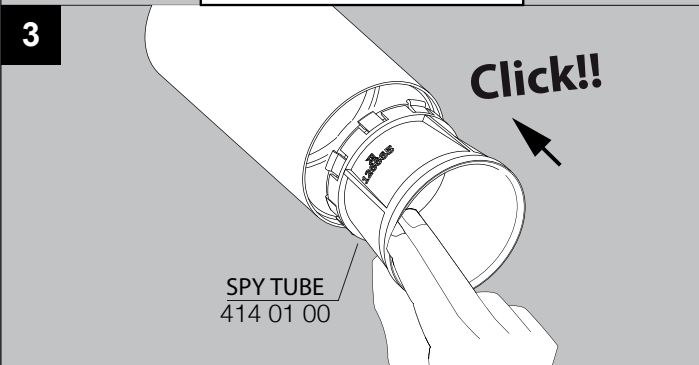

SRL 1 LED

SRL 1 LED
389 611 933
389 611 923





IP20

Beschermtd tegen vaste voorwerpen die groter zijn dan 12 mm
Protégé contre les objets solides de plus de 12 mm
Geschützt gegen Festkörper größer als 12 mm
Protected against solid objects greater than 12 mm
Protegido contra objetos sólidos superiores a 12 mm
Protetto contro oggetti solidi più grandi di 12 mm




Voorzien van aardingsaansluiting
Avec mise à la terre
Ausgerüst tet mit Erdungsanschluss
Provided with grounding
Con la toma de tierra
Con presa a terra

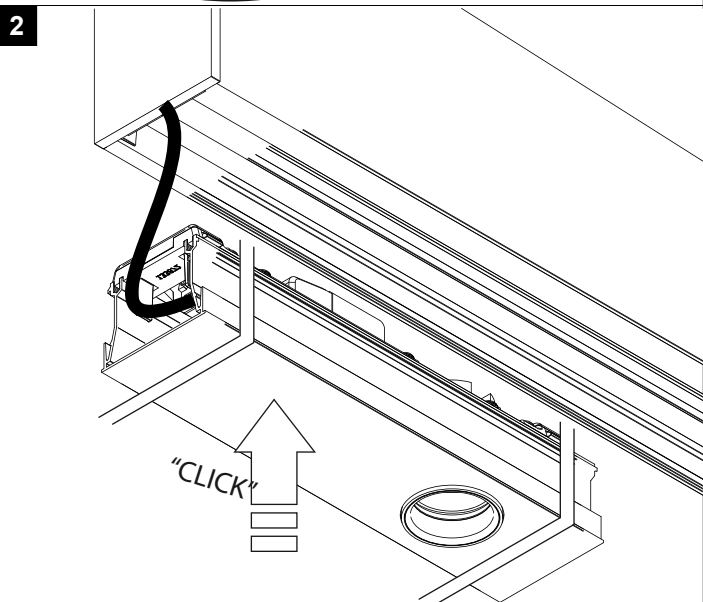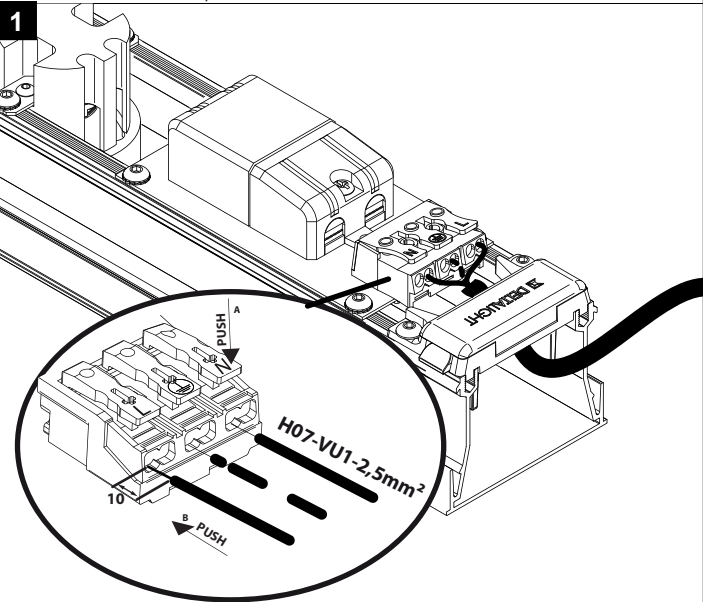

Minimum length: 250mm
Maximum length : 6m
Different modules can be combined.

SRL 2 LED

SRL 2 LED
389 612 933
389 612 923





IP20

Beschermtd tegen vaste voorwerpen die groter zijn dan 12 mm
Protégé contre les objets solides de plus de 12 mm
Geschützt gegen Festkörper größer als 12 mm
Protected against solid objects greater than 12 mm
Protegido contra objetos sólidos superiores a 12 mm
Protetto contro oggetti solidi più grandi di 12 mm




Voorzien van aardingsaansluiting
Avec mise à la terre
Ausgerüst tet mit Erdungsanschluss
Provided with grounding
Con la toma de tierra
Con presa a terra

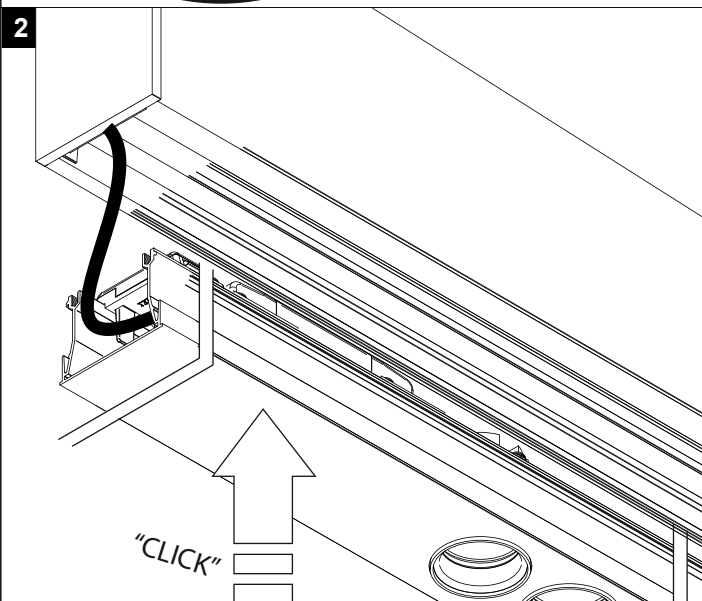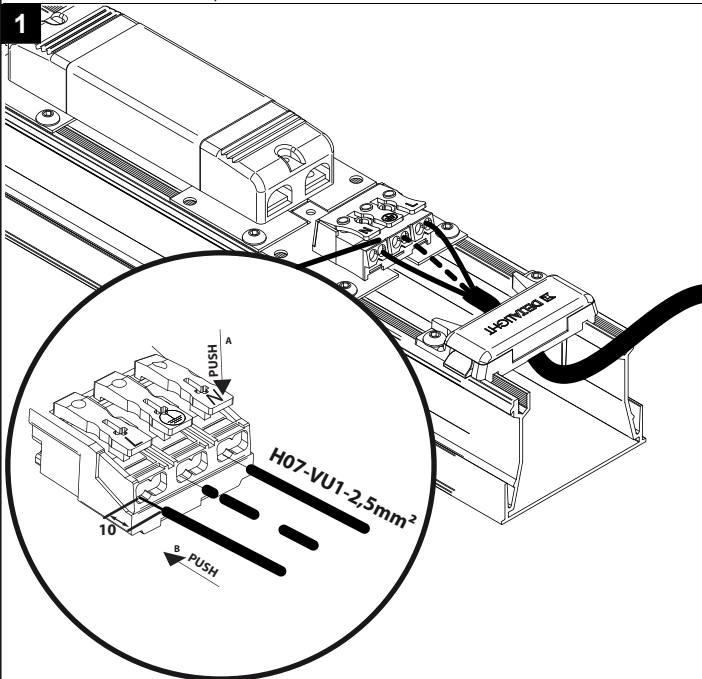


Minimum length: 450mm
Maximum length : 6m
Different modules can be combined.

REMOVAL OF A SRL - LED ARRAY

1

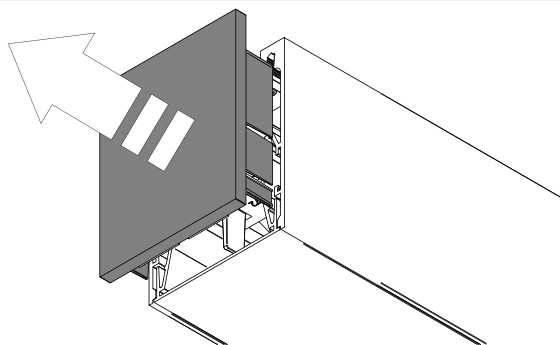

2

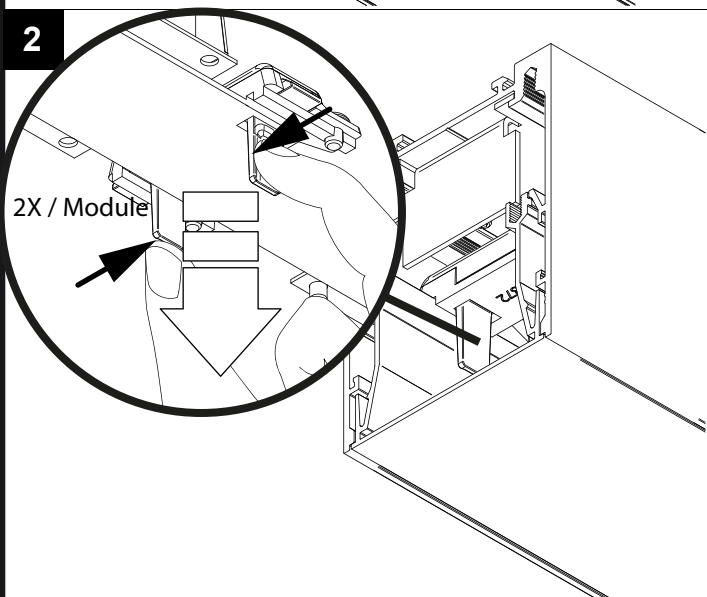

3

