


ZOOVER

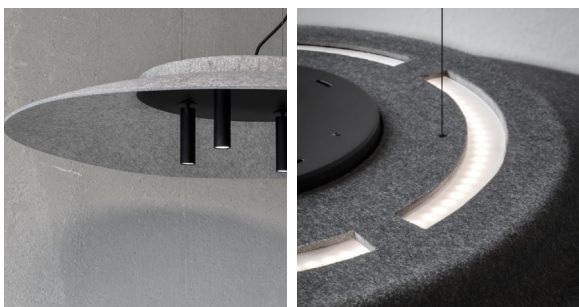

Zoover pretends to be heavy seen its size, nevertheless it looks very lightweight when hung into the room. Designed as a shallow dome, Zoover hides away a circle of light, giving it different looks depending on the point of view. Looking at it from aside, the thermoformed shell has a very neutral appearance. Only when lowering the viewpoint, more and more details catch the eye, as the diffuse light illuminates the inner textures of the scallop. Available in two sizes and two colours for the shade, Zoover adds volume, depth and texture to the room.

Performance	Zoover SBL	Zoover 4CLIP
LED Maintenance:	L70>60,000h	L90>50,000h
McAdam Step:	3	1
CRI:	90	90
*SP:	DOWN 34.4W UP 5.1W	5.8W
Rating:	IP20 (Damp)	IP20 (Damp)

Delivered Lumens	2700K	3000K	3500K
Zoover Down SBL:		3842Lm	
Zoover Up SBL:		668Lm	

Delivered Lumens	2700K			3000K			3500K		
Optic:	20°	30°	40°	20°	30°	40°	20°	30°	40°
Spy 27 S (Style 4CL):		459Lm			480Lm			498Lm	
Spy 27 L (Style 4CL):		276Lm			288Lm			299Lm	
Spy 39 S (Style 4CL):	614Lm		610Lm	642Lm		638Lm	665Lm		661Lm
Spy 39 L (Style 4CL):	472Lm		509Lm	494Lm		532Lm	511Lm		553Lm

Listing

ETL certified to US and Canadian safety standards.

Warranty

5-year limited warranty.

Ordering - Luminaire

ALL BOXES MUST BE FILLED IN TO CORRECTLY ORDER

Example: ZOVR-140LDU30-B-SBLD14-120PR-B-INC

Luminaire	Shape	Size	Fabric Color	Uplight*	CCT	Finish	Style	Controls***	Installation	Hardware Finish ²	Application
ZOV Zoover	R Round	120 Ø1200MM Ø47"-1/4 140 Ø1400MM Ø55"-1/8	D Dark Grey L Light Grey	DN Downlight only, no uplight DU Downlight with uplight added	30 3000K	B Black	SBL Pendant with Inner Illumination 9' Cables 3 suspension points 4CL ¹ Pendant with 4 Clip Monopoints	D1-120 0-10V dim 120V D5-120 Dali dim 120V D14-UNV 0-10V dim 120- 277V / FE ELV dim 120V D1-120 0-10V dim 120V	PR Round coverplate for 4" junction box PS Square coverplate for 4" junction box	B Black W White	INC Integral Power Supply

¹ Must be DN Downlight only, no uplight. See ordering table on next page for Spot selection associated with Style 4CL.

² Applies to PS & PR (coverplate).

*** Contact factory for additional dimming options.

Related Products

Soliscape Profile, Spy 52, Spy 66



Ordering - Spots

OPTIONAL - ONLY FOR STYLE 4CL

Example: SPY39S1-SP35MDA-GC-B-BV-ZOV-D1-120


--	--	--	--	--	--	--	--	--	--	--

Luminaire	Size	Length	Power*	CCT	Optic	Function	Finish	Inner Finish	Application ²	Controls
SPY SPY MODULES	27 27mm/ 1" - 1/16 diameter	S1 Standard L1 Long	SP Standard Power	27 2700K 30 3000K 35 3500K	MD Medium Spot 30°	A Adjustable	B-B Black-Black FBR-B Flemish Bronze-Black FG-B Flemish Gold-Black GC-B Gold Colored-Black	B Black BV Black Visor FBR ¹ Flemish Bronze FG ¹ Flemish Gold GC ¹ Gold Colored W ¹ White	ZOV Zooover 4CL	D1-120 0-10V dim 120V
	39 39mm/ 1" - 17/32" diameter	S1 Standard L1 Long	SP Standard Power	27 2700K 30 3000K 35 3500K	MS Medium Narrow Spot 20° MD Medium Spot 40°					


¹ Only available for Size 39.² Zooover luminaire specified separately.

Finish Options - Luminaire

ZOOVER 120 SBL



ZOOVER 140 SBL



ZOOVER SBL



LIGHT GREY




DARK GREY




UPLIGHT DETAIL

ZOOVER 4CLIP 120



ZOOVER 4CLIP 140



ZOOVER 4CLIP




LIGHT GREY




DARK GREY

Finish Options - Spots

SPY 27 S SINGLE






For application M20H




BLACK-BLACK

FLEMISH
BRONZE-BLACKFLEMISH
GOLD-BLACKGOLD COLORED
-BLACK

SPY 27 INNER FINISH - LENGTH S ONLY

BLACK
(DEFAULT)BLACK
INSTALLEDVISOR 27
(OPTIONAL)


BLACK

BLACK VISOR 27
INSTALLED



Finish Options - Spots (cont'd)

SPY 27 L SINGLE WITH INNER FINISH





BLACK - BLACK



FLEMISH
BRONZE - BLACK




FLEMISH
GOLD - BLACK



GOLD
COLORED - BLACK

SPY 39 S SINGLE





BLACK - BLACK



FLEMISH
BRONZE - BLACK




FLEMISH
GOLD - BLACK




GOLD
COLORED - BLACK

SPY 39 INNER FINISH - LENGTH S ONLY





BLACK



BLACK VISOR 39



FLEMISH BRONZE



FLEMISH GOLD



GOLD COLORED




WHITE



BLACK VISOR 39
INSTALLED

SPY 39 L SINGLE





BLACK - BLACK



FLEMISH BRONZE
- BLACK



FLEMISH GOLD
- BLACK




GOLD COLORED
- BLACK

SPY 39 INNER FINISH - LENGTH L ONLY






BLACK



FLEMISH BRONZE



FLEMISH GOLD






GOLD COLORED




WHITE




ZOOVER SBL DOWN



PRB/PRW - COVERPLATE R 212



BLACK or WHITE
Requires 4" junction box



BLACK or WHITE
Requires 4" junction box



Driver Options

D1

- Dimming Control 0-10V
- Dimming Range 1-100%
- Dim to off no
- Power Factor @ Full Load 0.96
- Efficiency @ Full Load ≥ 92
- THD @ Full Load $< 10\%$ under 120Vac input with 80~100% load condition (for all output currents)

Dimmer Compatibility

- Leviton IP710-LFZ / IP710-DLX
- Lutron DDTV/DVSTV/DVSCTV/DVSCSTV

D5

- Dimming Control Dali
- Dimming Range 1-100%
- Dim to off no
- Power Factor @ Full Load 0.96
- Efficiency @ Full Load ≥ 92
- THD @ Full Load $< 10\%$ under 120Vac input with 80~100% load condition (for all output currents)

D14

- Dimming Control Phase Control or 0-10V
- Dimming Range 1-100%
- Dim to off Yes
- Power Factor @ Full Load > 0.9
- Efficiency @ Full Load ≥ 90
- THD @ Full Load $< 20\%$

Dimmer Compatibility Phase

- Levitation IP1I06-1Z / 6631-2
- Lutron DVELV-303P / MAELV-600

Dimmer Compatibility 0-10V

- Levitation IP710-DLZ
- Lutron DDTV-XX

As technology changes, please use information above as guidance. For most recent updated information please contact factory. Specifications subject to change without notice.