




SOLI - 52 92720 DIM5

27115 9225 GC

AVAILABLE IN  
**BLACK** 27115 9225 B  
**GOLD COLOURED** 27115 9225 GC  
**WHITE** 27115 9225 W

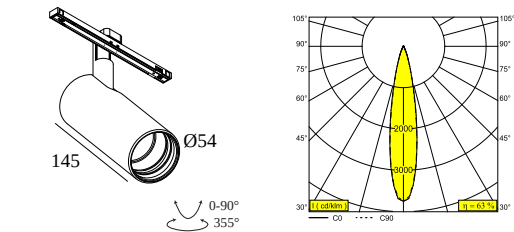

 [View on website](#)



| General info       |                                                                                             |
|--------------------|---------------------------------------------------------------------------------------------|
| LOCATION           | indoor                                                                                      |
| INSTALLATION       | Low voltage systems Low voltage system mounted                                              |
| INGRESS PROTECTION | IP20                                                                                        |
| WEIGHT (KG)        | 0.4                                                                                         |
| ADJUSTABILITY      | 0° to 90° swiveling, 360° rotatable                                                         |
| INFORMATION        | REFLECTOR FL-20°<br>EXCL.LED POWER SUPPLY 48V-DC<br>Optional REFLECTORS 30° & 45° available |

| Electrical info |               |
|-----------------|---------------|
| ELECTRICAL      | 48V-DC        |
| CLASS           | III           |
| DIM TYPE        | DALI          |
| ENERGY CLASS    | E             |
| CERTIFICATES    | CB, ENEC, LCA |

| Lightsource info            |                                                    |
|-----------------------------|----------------------------------------------------|
| LIGHTSOURCE NAME            | LED                                                |
| LIGHTSOURCE                 | LED array 10,3W / CRI>90 (R9: 60) / 2700K / 1224lm |
| TM-30 VALUES                | rf: 89 / Rg: 100                                   |
| SDCM                        | SDCM1                                              |
| RISKGROUP                   | RG1                                                |
| LM80                        | L90B10 > 50000                                     |
| BEAMANGLE                   | 20°                                                |
| LED TECHNICS (LIGHT SOURCE) | 1224lm // 10,3W // 119lm/W                         |
| LED TECHNICS (LUMINAIRE)    | 767lm // 11,8W // 65lm/W                           |

| Requirements            |  |
|-------------------------|--|
| SPY 52 TUBE             |  |
| LED POWER SUPPLY 48V-DC |  |

| Accessories           |  |
|-----------------------|--|
| HONEYCOMB 42          |  |
| SPREAD LENS 42        |  |
| LINEAR SPREAD LENS 42 |  |
| SOFTENING LENS 42     |  |
| GLASS SBL 42          |  |

# DELTALIGHT

## SOLI - 52 92720 DIM5

27115 9225 GC

For detailed installation instructions, please consult the manual : [27115\\_XXX5\\_HAND.pdf](#)

### FINISH YOUR SPECIFICATION


#### LED power supplies

#### # of Fixtures



# of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.


Min current | Max current



**300 89 48 100** LED POWER SUPPLY 48V-DC / 100W DIN

8


Dimtype: non-dimmable



**300 89 48 240** LED POWER SUPPLY 48V-DC / 240W DIN

20

Dimtype: non-dimmable




**21012 0230** LED POWER SUPPLY 48V-DC / 100W

8

Dimtype: non-dimmable

Cutout dimension (mm): 40




**21012 0240** LED POWER SUPPLY 48V-DC / 200W

16


Dimtype: non-dimmable

Cutout dimension (mm): 40

#### Light altering devices



**19810 0010 B** HONEYCOMB 42 SINGLE USE B




**19810 0020** LINEAR SPREAD LENS 42

# DELTALIGHT

## SOLI - 52 92720 DIM5


27115 9225 GC




**19810 0030** SPREAD LENS 42

☐

**19810 0040** SOFTENING LENS 42

☐


**19810 0050** GLASS SBL 42

☐

**19810 0060 B** HONEYCOMB 42 DOUBLE USE B

☐

### Finish your product



**19810 0100 B** SPY 52 TUBE B

☐

**19810 0100 FBR** SPY 52 TUBE FBR

☐

**19810 0100 FG** SPY 52 TUBE FG

☐


**19810 0100 GC** SPY 52 TUBE GC

☐

**19810 0100 W** SPY 52 TUBE W

☐

### Replaceable reflector / lens



**19810 0180** SPY 52 REFLECTOR 20°

☐

# DELTALIGHT

## SOLI - 52 92720 DIM5

27115 9225 GC





**19810 0190** SPY 52 REFLECTOR 45°



**19810 0240** SPY 52 REFLECTOR 30°



### COMPATIBLE COMPOSABLES

| SOLISCAPE profile                                                                                                                                                                                                                | Available Colours                                                                                                                                                           |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <div><br/></div> <p><b>27111 0020</b> SOLI - PROFILE 2m</p>     |       |
| <div><br/></div> <p><b>27111 0030</b> SOLI - PROFILE 3m</p> |   |

Notes: