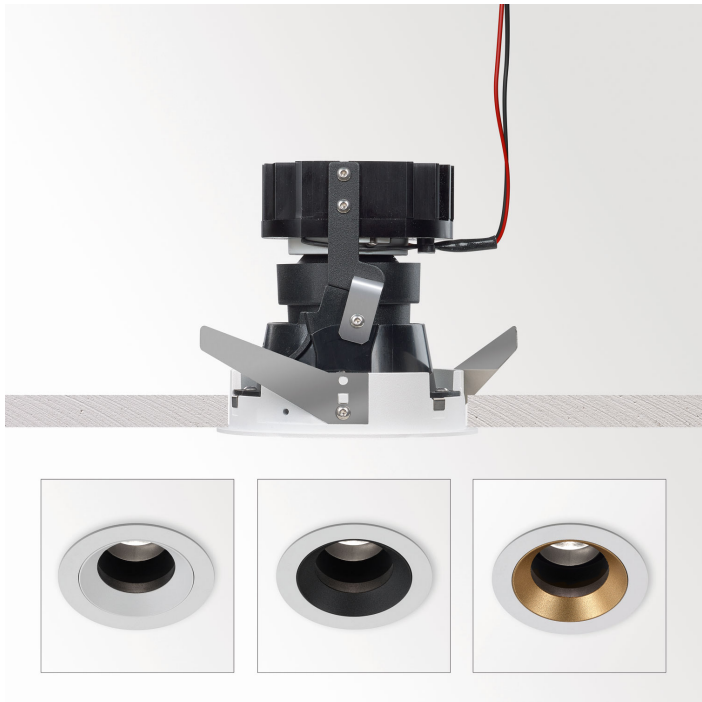
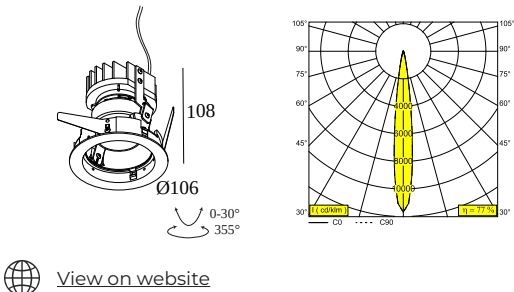




iMAX II ROUND ADJUSTABLE LP
92712

24210 9210 W

AVAILABLE IN
NOIR 24210 9210 B
BLANC 24210 9210 W



General info	
LOCATION	interieur
INSTALLATION	Plafond Encastré
CUTOUT SHAPE/SIZE (MM)	circulaire - 98
RECESSED DEPTH (MM)	125
THICKNESS OF MOUNTING SURFACE (MM)	max.25
INGRESS PROTECTION	IP20 or IP54 (with TUBE IP)
WEIGHT (KG)	0.4
ADJUSTABILITY	0° à 30° inclinable, 355° rotatif
INFORMATION	LENS SP-12° EXCLLED POWER SUPPLY 350-500mA-DC

Electrical info	
CLASS	III
DIM TYPE	selon le type d'alimentation externe
ENERGY CLASS	E
CERTIFICATION	CB, EAC, ENEC

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 5,8-8,6W / CRI>90 (R9: 60) / 2700K / 702-974lm
RVALUES	rf: 89 / Rg: 100
SDMC	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	12°
LED TECHNICS (LIGHT SOURCE)	974lm // 8,6W // 113lm/W
LED TECHNICS (LUMINAIRE)	750lm // 9,9W // 76lm/W

Requirements	
iMAX II TUBE ROUND LED POWER SUPPLY 350 / 500mA-DC DIM	

Accessories	
iMAX II ACCESSOIRES	

For detailed installation instructions, please consult the manual : [24210_XXXX_HAND.pdf](#)

iMAX II ROUND ADJUSTABLE LP 92712


24210 9210 W

CEILING COMPATIBILITY



Ceiling Type	Mounting Kit	
 System ceiling	 15215 0010 - MOUNTING KIT FLUSH iMAX II ROUND	Required
 Plasterboard	 15215 0010 - MOUNTING KIT FLUSH iMAX II ROUND	Required
 Stucanet	 15215 0010 - MOUNTING KIT FLUSH iMAX II ROUND	Required
 Wood	-	
 Stretched ceiling	-	

FINISH YOUR SPECIFICATION

les batteries de secours











	21032 0270 B EMERGENCY UNIT 7W / 1h + LED INDICATOR HOLDER B	☐
	21032 0270 W EMERGENCY UNIT 7W / 1h + LED INDICATOR HOLDER W	☐

les alimentations led

		# of Fixtures
 web2print_power_supply_info_box		Min current Max current
	300 48 350 ED1 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM1 Dimtype: 1 à 10 V Cutout dimension (mm): 30	2 ☐
	300 48 350 ED5 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5 Dimtype: DALI Cutout dimension (mm): 45	2 ☐










iMAX II ROUND ADJUSTABLE LP 92712

24210 9210 W

	300 48 350 MDL LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W MDL	2	☐
	Dimtype: non dimmable		
	Cutout dimension (mm): 30		
	300 48 350 WDL LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W WDL	2	☐
	Dimtype: WDL = dimmable sans fil		
	Cutout dimension (mm): 45		
	300 48 500 ED1 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM1	2	☐
	Dimtype: 1 à 10 V		
	Cutout dimension (mm): 30		
	300 48 500 ED5 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5	2	☐
	Dimtype: DALI		
	Cutout dimension (mm): 45		
	300 48 500 MDL LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W MDL	2	☐
	Dimtype: non dimmable		
	Cutout dimension (mm): 30		
	300 48 500 WDL LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W WDL	2	☐
	Dimtype: WDL = dimmable sans fil		
	Cutout dimension (mm): 45		
	300 90 61 LED POWER SUPPLY MULTI-POWER DIM6	2 2	☐
	Dimtype: fin de phase ou bouton poussoir		
	Cutout dimension (mm): 56		
	300 90 63 LED POWER SUPPLY MULTI-POWER DIM9	4(4) 4(4)	☐
	Dimtype: 1 à 10 V ou DALI ou bouton poussoir		
	Cutout dimension (mm): 82		
	300 90 64 LED POWER SUPPLY MULTI-POWER DIM7	3(2) 2(1)	☐
	Dimtype: 1 à 10 V ou bouton poussoir		
	Cutout dimension (mm): 72		
	300 90 67 LED POWER CONVERTER 24V-DC TO MULTI CURRENT 48W DIM9	2 -	☐
	Dimtype: 1 à 10 V ou DALI ou bouton poussoir		











iMAX II ROUND ADJUSTABLE LP 92712

24210 9210 W

	<u>300 90 68</u> LED POWER SUPPLY MULTI-POWER DIM5	2(2) 2(1)	☐
	Dimtype: DALI		
	Cutout dimension (mm): 72		
	<u>300 90 69</u> LED POWER SUPPLY MULTI-POWER HV DIM9	2->6(6) 6(4)	☐
	Dimtype: 1 à 10 V ou DALI ou bouton poussoir		
	Cutout dimension (mm): 84		
	<u>300 90 124</u> LED POWER SUPPLY MULTI-POWER DIM7	2(2) 2(1)	☐
	Dimtype: 1 à 10 V ou bouton poussoir		
	Cutout dimension (mm): 55		
	<u>300 90 125</u> LED POWER SUPPLY MULTI-POWER MINI DIM5	2(2) 2(1)	☐
	Dimtype: DALI		
	Cutout dimension (mm): 55		
	<u>300 90 135</u> LED POWER SUPPLY MULTI-POWER HV	3->4 2->4	☐
	Dimtype: non dimmable		
	Cutout dimension (mm): 90		
	<u>21012 0010</u> LED POWER SUPPLY MULTI POWER	2 2	☐
	Dimtype: non dimmable		
	Cutout dimension (mm): 50		
	<u>21012 0021</u> LED POWER SUPPLY MULTI POWER DIM1	3 3	☐
	Dimtype: 1 à 10 V		
	Cutout dimension (mm): 54		
	<u>21012 0035</u> LED POWER SUPPLY MULTI POWER DIM5	3 3	☐
	Dimtype: DALI		
	Cutout dimension (mm): 54		
	<u>21012 004W</u> LED POWER SUPPLY MULTI-POWER WDL	4(4) 4(3)	☐
	Dimtype: WDL = dimmable sans fil		
	Cutout dimension (mm): 84		
	<u>21012 005W</u> LED POWER SUPPLY MULTI-POWER COMPACT WDL	3 3	☐
	Dimtype: WDL = dimmable sans fil		
	Cutout dimension (mm): 54		

iMAX II ROUND ADJUSTABLE LP 92712

24210 9210 W

	21012 0258 LED POWER SUPPLY MULTI POWER 200-350 / 10W DIM8 Dimtype: fin de phase Cutout dimension (mm): 50	1	☐
	21012 0268 LED POWER SUPPLY MULTI POWER 200-350 / 15W DIM8 Dimtype: fin de phase Cutout dimension (mm): 50	2->2	☐
	21012 0278 LED POWER SUPPLY MULTI POWER 500-700 / 20W DIM8 Dimtype: fin de phase Cutout dimension (mm): 55	1	☐
	21012 0288 LED POWER SUPPLY MULTI POWER 500-700 / 36W DIM8 Dimtype: fin de phase Cutout dimension (mm): 55	2->3	☐
	21012 0298 LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8 Dimtype: fin de phase Cutout dimension (mm): 48	2 2	☐
	21012 0308 LED POWER SUPPLY 350mA / 7,35W DIM8 Dimtype: fin de phase Cutout dimension (mm): 40	1	☐
	21012 0318 LED POWER SUPPLY 500mA / 10W DIM8 Dimtype: fin de phase Cutout dimension (mm): 40	1	☐
	21012 0480 LED POWER SUPPLY 350mA-DC / 17W IP68 Dimtype: non dimmable Cutout dimension (mm): 60	2(2)	☐
	21012 0500 LED POWER SUPPLY 500mA-DC / 24W IP68 Dimtype: non dimmable Cutout dimension (mm): 60	2(1)	☐
	21032 0295 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5 Dimtype: DALI Cutout dimension (mm): 30	2	☐

DELTALIGHT

iMAX II ROUND ADJUSTABLE LP 92712





24210 9210 W

	21032 0305 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5	2 ☐
Dimtype: DALI		
Cutout dimension (mm): 30		

kit de montage

	15215 0010 MOUNTING KIT FLUSH iMAX II ROUND	☐
Cutout dimension (mm): 121		

modifier les dispositifs de lumière



	24213 0050 B iMAX II HONEYCOMB B	☐
	24213 0060 iMAX II GLASS SBL	☐
	24213 0070 iMAX II LINEAR SPREAD LENS	☐
	24213 0090 iMAX II SOFTENING LENS	☐
	24213 0100 iMAX II SPREAD LENS	☐

DELTALIGHT

iMAX II ROUND ADJUSTABLE LP 92712

24210 9210 W

Terminez votre produit

	<u>24213 0010 B</u>	iMAX II TUBE ROUND B	☐
	<u>24213 0010 FG</u>	iMAX II TUBE ROUND FG	☐
	<u>24213 0010 MMAT</u>	iMAX II TUBE ROUND MMAT	☐
	<u>24213 0010 W</u>	iMAX II TUBE ROUND W	☐
	<u>24213 0040 B</u>	iMAX II TUBE ROUND IP B	☐
	<u>24213 0040 FG</u>	iMAX II TUBE ROUND IP FG	☐
	<u>24213 0040 MMAT</u>	iMAX II TUBE ROUND IP MMAT	☐
	<u>24213 0040 W</u>	iMAX II TUBE ROUND IP W	☐

Notes: