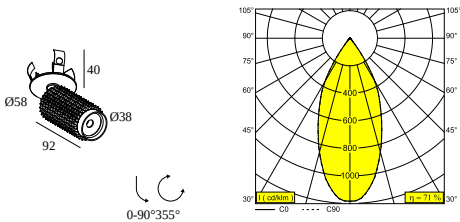




PUNK 39 CLIP 92745

471 111 811 921 B-B

AVAILABLE IN
BLACK-BLACK 471 111 811 921 B-B



 [View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Ceiling Semi-recessed
CUTOUT SHAPE/SIZE (MM)	round - 51
RECESSED DEPTH (MM)	40
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.4
ADJUSTABILITY	0° to 90° swiveling, 355° rotatable
INFORMATION	REFLECTOR WFL-45° EXCLLED POWER SUPPLY 350mA-DC

Electrical info	
CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	D
CERTIFICATES	CB, EAC, ENEC

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 5,8W / CRI>90 (R9: 60) / 2700K / 753lm
TM-30 VALUES	rf: 89 / Rg: 100
SDCM	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	45°
LED TECHNICS (LIGHT SOURCE)	753lm // 5,8W // 129lm/W
LED TECHNICS (LUMINAIRE)	507lm // 6,7W // 76lm/W

Requirements
LED POWER SUPPLY 350mA-DC DIM

Options
MOUNTING KIT FLUSH SPY

For detailed installation instructions, please consult the manual : [471 111 811 XXX HAND.pdf](#)

DELTALIGHT

PUNK 39 CLIP 92745

471 111 811 921 B-B

CEILING COMPATIBILITY

Ceiling Type	Mounting Kit
 System ceiling	 414 90 01 - MOUNTING KIT FLUSH SPY Required
 Plasterboard	 414 90 01 - MOUNTING KIT FLUSH SPY Required
 Stucanet	 414 90 01 - MOUNTING KIT FLUSH SPY Required
 Wood	-
 Concrete	-
 Concrete + plaster	 414 90 01 - MOUNTING KIT FLUSH SPY Required
 Lintel + plaster	 414 90 01 - MOUNTING KIT FLUSH SPY Required
 Hollow-core slab	-
 Hollow-core slab + plaster	 414 90 01 - MOUNTING KIT FLUSH SPY Required
 Stretched ceiling	-

FINISH YOUR SPECIFICATION


LED power supplies

of Fixtures



of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current




300 48 350 ED1 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM1

1

Dimtype: 1-10V

Cutout dimension (mm): 30



300 48 350 ED5 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5

1









Dimtype: DALI

Cutout dimension (mm): 45

DELTALIGHT











PUNK 39 CLIP 92745

471 111 811 921 B-B

	300 48 350 MDL LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W MDL	1	☐
	Dimtype: non-dimmable		
	Cutout dimension (mm): 30		
	300 48 350 WDL LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W WDL	1	☐
	Dimtype: WDL = wireless dimmable		
	Cutout dimension (mm): 45		
	300 90 61 LED POWER SUPPLY MULTI-POWER DIM6	2	☐
	Dimtype: mains (phase cut-off) or push button		
	Cutout dimension (mm): 56		
	300 90 63 LED POWER SUPPLY MULTI-POWER DIM9	4(4)	☐
	Dimtype: 1-10V or DALI or push button		
	Cutout dimension (mm): 82		
	300 90 64 LED POWER SUPPLY MULTI-POWER DIM7	2(1)	☐
	Dimtype: 1-10V or push button		
	Cutout dimension (mm): 72		
	300 90 67 LED POWER CONVERTER 24V-DC TO MULTI CURRENT 48W DIM9	2	☐
	Dimtype: 1-10V or DALI or push button		
	300 90 68 LED POWER SUPPLY MULTI-POWER DIM5	2(2)	☐
	Dimtype: DALI		
	Cutout dimension (mm): 72		
	300 90 69 LED POWER SUPPLY MULTI-POWER HV DIM9	2->6(6)	☐
	Dimtype: 1-10V or DALI or push button		
	Cutout dimension (mm): 84		
	300 90 124 LED POWER SUPPLY MULTI-POWER DIM7	3(2)	☐
	Dimtype: 1-10V or push button		
	Cutout dimension (mm): 55		
	300 90 125 LED POWER SUPPLY MULTI-POWER MINI DIM5	2(2)	☐
	Dimtype: DALI		
	Cutout dimension (mm): 55		

PUNK 39 CLIP 92745

471 111 811 921 B-B


	300 90 135 LED POWER SUPPLY MULTI-POWER HV Dimtype: non-dimmable Cutout dimension (mm): 90	3->3	☐
	21012 0010 LED POWER SUPPLY MULTI POWER Dimtype: non-dimmable Cutout dimension (mm): 50	2	☐
	21012 0021 LED POWER SUPPLY MULTI POWER DIM1 Dimtype: 1-10V Cutout dimension (mm): 54	3	☐
	21012 0035 LED POWER SUPPLY MULTI POWER DIM5 Dimtype: DALI Cutout dimension (mm): 54	3	☐
	21012 004W LED POWER SUPPLY MULTI-POWER WDL Dimtype: WDL = wireless dimmable Cutout dimension (mm): 84	3(3)	☐
	21012 005W LED POWER SUPPLY MULTI-POWER COMPACT WDL Dimtype: WDL = wireless dimmable Cutout dimension (mm): 54	3	☐
	21012 0258 LED POWER SUPPLY MULTI POWER 200-350 / 10W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 50	1	☐
	21012 0298 LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8 Dimtype: mains (phase cut-off) Cutout dimension (mm): 48	2	☐
	21012 0480 LED POWER SUPPLY 350mA-DC / 17W IP68 Dimtype: non-dimmable Cutout dimension (mm): 60	2(2)	☐
	21032 0295 LED POWER CONVERTER 48V-DC to 350 mA-DC / 15W DIM5 Dimtype: DALI Cutout dimension (mm): 30	2	☐

DELTALIGHT

PUNK 39 CLIP 92745

471 111 811 921 B-B

Mounting kits



414 90 01 MOUNTING KIT FLUSH SPY



Cutout dimension (mm): 83

Notes: