



COMPO M SOFT 93020

9 15728 9020 B


AVAILABLE IN

SCHWARZ 9 15728 9020 B

CHROM 9 15728 9020 C

DUNKLES CHROM 9 15728 9020 DC

WEISS 9 15728 9020 W

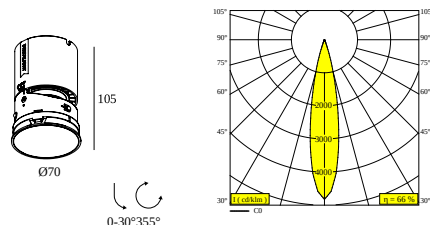

 [View on website](#)



General info	
LOCATION	innenbereich
INSTALLATION	Decke Einbau
CUTOUT SHAPE/SIZE (MM)	rund - 110
RECESSED DEPTH (MM)	105
THICKNESS OF MOUNTING SURFACE (MM)	max.25
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.258
ADJUSTABILITY	0° to 30° schwenkbar, 355° drehbar

Electrical info	
CLASS	III
DIM TYPE	Abhängig von der Art der externen Stromversorgung
ENERGY CLASS	F

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 11,8W / CRI>90 (R9: 50) / 3000K-1800K / 1307lm
TM-30 VALUES	rf: 90 / Rg: 99
SDCM	SDCM2
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	20°
LED TECHNICS (LIGHT SOURCE)	1307lm // 11,8W // 110lm/W
LED TECHNICS (LUMINAIRE)	860lm // 13,6W // 63lm/W

Requirements

LED POWER SUPPLY 350 mA - DC

Accessories

COMPO M HONEYCOMB SINGLE USE B

COMPO M LINEAR SPREAD LENS

COMPO M SPREAD LENS

COMPO M SOFTENING LENS

COMPO M GLASS SBL

For detailed installation instructions, please consult the manual : [9_15728_XXX0_HAND.pdf](#)

DELTALIGHT

COMPO M SOFT 93020

9 15728 9020 B

CEILING COMPATIBILITY

Ceiling Type	Mounting Kit	
	 15710 0020 - MOUNTING KIT COMPO M TRIM	Required
	 15710 0050 - MOUNTING KIT COMPO M TRIMLESS	Required
	 15710 0020 - MOUNTING KIT COMPO M TRIM	Required
	 15710 0050 - MOUNTING KIT COMPO M TRIMLESS	Required
	 15710 0020 - MOUNTING KIT COMPO M TRIM	Required
	 15710 0050 - MOUNTING KIT COMPO M TRIMLESS	Required

FINISH YOUR SPECIFICATION

LED Netzteil

of Fixtures



of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current

15710 4100	LED POWER SUPPLY MULTIPOWER 12W DIM8 350mA	1
15710 4500	LED POWER SUPPLY MULTIPOWER 12W DIM1 350mA	1
15710 5300	LED POWER SUPPLY MULTIPOWER 12W DALI DT6 350mA	1

Dimtype: DALI

Mounting Kit



15710 0020 B MOUNTING KIT COMPO M TRIM B

Cutout dimension (mm): 76

15710 0020 W MOUNTING KIT COMPO M TRIM W



15710 0050 MOUNTING KIT COMPO M TRIMLESS

Cutout dimension (mm): 76

DELTALIGHT

COMPO M SOFT 93020

9 15728 9020 B

Licht veredelndes Zubehör

15710 1100 B	COMPO M HONEYCOMB SINGLE USE B	☐
15710 1110	COMPO M LINEAR SPREAD LENS	☐
Cutout dimension (mm): 32,5		
15710 1120	COMPO M SPREAD LENS	☐
Cutout dimension (mm): 32,5		
15710 1130	COMPO M SOFTENING LENS	☐
Cutout dimension (mm): 32,5		
15710 1140	COMPO M GLASS SBL	☐
Cutout dimension (mm): 32,5		

Notes: