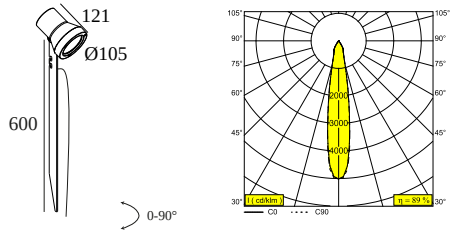




KIX II PIN 24V 92711

REFERENCE 13531 9210 N

AVAILABLE IN
ALU GREY 13531 9210 A
ANTHRACITE 13531 9210 N
PINE GREEN 13531 9210 PGR



 [View on website](#)



General info	
LOCATION	outdoor
INSTALLATION	Floor Surface mounted
INGRESS PROTECTION	IP65
PROTECTION AGAINST MECHANICAL IMPACT	IK03
WEIGHT (KG)	1.2
ADJUSTABILITY	180° swiveling, 360° rotatable
INFORMATION	REFLECTOR SP-11° INCL.1 x CABLE H05 RN-F 2 x 1mm² 2m EXCL.LED POWER SUPPLY 24V-DC (non-dimmable or dimmable with PWM output)

Electrical info	
ELECTRICAL	24V-DC
CLASS	III
DIM TYPE	non-dimmable
ENERGY CLASS	E
CERTIFICATES	CB, ENEC

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 5,8W / CRI>90 (R9: 60) / 2700K / 753lm
TM-30 VALUES	Rf: 89 / Rg: 100
SDCM	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	11°
LED TECHNICS (LIGHT SOURCE)	753lm // 5,8W // 129lm/W
LED TECHNICS (LUMINAIRE)	667lm // 6,7W // 100lm/W







Requirements
LED POWER SUPPLY 24V-DC

Options
CBOX
IP68 CONNECTION KIT
IP68 CONNECTOR 3P

Accessories
KAP KIX
HONEYCOMB KIX

For detailed installation instructions, please consult the manual : [13531_XXX0_HAND.pdf](#)

FINISH YOUR SPECIFICATION


LED power supplies		# of Fixtures
 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the ' ' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.		Min current Max current
 300 89 24 150 LED POWER SUPPLY 24V-DC / 150W Dimtype: non-dimmable Cutout dimension (mm): 75	21	
 21012 0160 LED POWER SUPPLY 24V-DC / 24W Dimtype: non-dimmable Cutout dimension (mm): 55	3	
 21012 0171 LED POWER SUPPLY 24V-DC / 60W DIM1 Dimtype: 1-10V Cutout dimension (mm): 61	8	
 21012 0181 LED POWER SUPPLY 24V-DC / 90W DIM1 Dimtype: 1-10V Cutout dimension (mm): 70	12	
 21012 0191 LED POWER SUPPLY 24V-DC / 120W DIM1 Dimtype: 1-10V Cutout dimension (mm): 70	17	
Miscellaneous control equipment		
 21032 0320 AMBIENT LIGHT SENSOR AND 24V DIMMER (PWM)		

DELTALIGHT

KIX II PIN 24V 92711

13531 9210 N


Waterproof connection parts



216 12 00 CBOX

☐

Cutout dimension (mm): 142 x 142




216 12 01 IP68 CONNECTION KIT

☐


216 12 02 IP68 CONNECTOR 3P

☐

Light altering devices



232 10 00 N KAP KIX N

☐

232 10 03 N HONEYCOMB KIX N

☐

Notes: