




M20/M26H - HEDRA L 92733 DIM5

REFERENCE 23364 9225 GC

AVAILABLE IN
BLACK BRONZE 23364 9225 BBR
GOLD COLOURED 23364 9225 GC

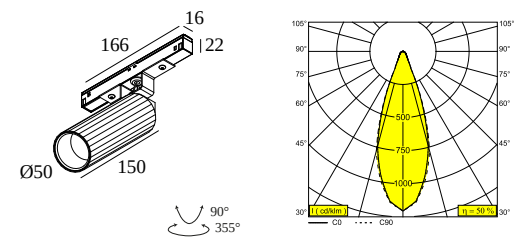

[View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Low voltage systems Low voltage system mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.5
ADJUSTABILITY	0° to 90° swiveling, 355° rotatable
INFORMATION	REFLECTOR FL-33° EXCL.LED POWER SUPPLY 48V-DC
Electrical info	
ELECTRICAL	48V-DC
CLASS	III
DIM TYPE	DALI
ENERGY CLASS	E
CERTIFICATES	CB, ENEC
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 8,6W / CRI>90 (R9: 60) / 2700K / 1041lm
TM-30 VALUES	Rf: 89 / Rg: 100
SDCM	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	33°
LED TECHNICS (LIGHT SOURCE)	1041lm // 8,6W // 121lm/W
LED TECHNICS (LUMINAIRE)	523lm // 9,9W // 53lm/W

Remarks
[Take a look at our MAGNETIC PROFILES movie](#)

Requirements
VIZIR TUBE
LED POWER SUPPLY 48V-DC

Accessories
VIZIR HONEYCOMB
VIZIR SOFTENING LENS

M20/M26H - HEDRA L 92733 DIM5

23364 9225 GC

For detailed installation instructions, please consult the manual : [23364_9X25_HAND.pdf](#)

FINISH YOUR SPECIFICATION


LED power supplies

of Fixtures



of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current




300 89 48 90 LED POWER SUPPLY 48V-DC / 90W

7

Dimtype: non-dimmable


Cutout dimension (mm): 75



300 89 48 100 LED POWER SUPPLY 48V-DC / 100W DIN

8


Dimtype: non-dimmable



300 89 48 150 LED POWER SUPPLY 48V-DC / 150W

12


Dimtype: non-dimmable



300 89 48 240 LED POWER SUPPLY 48V-DC / 240W DIN

18

Dimtype: non-dimmable




21012 0230 LED POWER SUPPLY 48V-DC / 100W

8

Dimtype: non-dimmable

Cutout dimension (mm): 40



21012 0240 LED POWER SUPPLY 48V-DC / 200W

16

Dimtype: non-dimmable

Cutout dimension (mm): 40

DELTALIGHT

M20/M26H - HEDRA L 92733 DIM5

23364 9225 GC


Power box

of Fixtures



of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current




23380 0010 B SLM26H - POWERBOX 48V-DC / 96W B

8

Dimtype: non-dimmable

23380 0010 W SLM26H - POWERBOX 48V-DC / 96W W

8



23380 0020 B SLM26H - MID POWERBOX 48V-DC / 96W B


8

Dimtype: non-dimmable

23380 0020 W SLM26H - MID POWERBOX 48V-DC / 96W W

8

Light altering devices




473 03 01 B VIZIR HONEYCOMB B



473 03 04 VIZIR SOFTENING LENS

Finish your product



473 01 00 B VIZIR TUBE B

473 01 00 FBR VIZIR TUBE FBR

473 01 00 FG VIZIR TUBE FG

DELTALIGHT



M20/M26H - HEDRA L 92733 DIM5



23364 9225 GC

473 01 00 W VIZIR TUBE W



COMPATIBLE COMPOSABLES



SHIFTLINE M26H + SBL	Available Colours
 30411 9205 SHIFTLINE M26H + SBL 2m DIM5	 
 30411 9305 SHIFTLINE M26H + SBL 2m DIM5	 
 30412 9205 SHIFTLINE M26H + SBL 3m DIM5	 
 30412 9305 SHIFTLINE M26H + SBL 3m DIM5	 
 30413 9205 SHIFTLINE M26H + SBL 4m DIM5	 
 30413 9305 SHIFTLINE M26H + SBL 4m DIM5	 

SHIFTLINE M26H profile	Available Colours
 23359 0000 SLM26H - PROFILE	 
 23359 0010 SLM26H - PROFILE 1m	 





DELTALIGHT

M20/M26H - HEDRA L 92733 DIM5

23364 9225 GC

	23359 0020 SLM26H - PROFILE 2m	
	23359 0030 SLM26H - PROFILE 3m	

SPLITLINE M20 ST profile		Available Colours
	23397 0000 SPM20 ST - PROFILE	
	23397 0020 SPM20 ST - PROFILE 2m	
	23397 0030 SPM20 ST - PROFILE 3m	

SPLITLINE M20 profile		Available Colours
	420 20 10 00 SPM20 - PROFILE 1m	
	420 20 20 00 SPM20 - PROFILE 2m	
	420 20 30 00 SPM20 - PROFILE 3m	
	23301 0000 SPM20 - PROFILE B	

DELTALIGHT

M20/M26H - HEDRA L 92733 DIM5

23364 9225 GC

Notes: