

SUPERLOOP-XY180 MDL



Used with the Superloop Delta Light custom engineered 48V low voltage track. XY180' is a 3-piece lighting collection designed by OMA. The collection was inspired by a fascination with point, line and surface; key architectural elements. The ceiling lights are meant for individual and shared workspaces, but can also be applied to domestic and public interior spaces.

Specification	
Installation Method:	4" J-Box
Adjustability:	Adjustable 0-180° / 360°
Rating:	IP20

Performance	
CRI:	90
*LED Tube:	8.9W

Delivered Lumens	3000K
LED Tube:	874lm

Listing

ETL certified to US and Canadian safety standards.

Warranty

5-year limited warranty.

Ordering

ALL BOXES MUST BE FILLED IN TO CORRECTLY ORDER

Example: XY1T-SP30A-B-SLP-MDL

Luminaire	Shape	Power*	CCT	Function	Finish	Style
XY XY180	1T Single LED Tube (530mm / 20 7/8")	SP Standard Power	30 3000K	A Adjustable	B Black	SLP-MDL ⁽¹⁾ Superloop MDL


¹ For use on Superloop MDL; 48V power supplied with Superloop MDL.

Related Products

Superloop-Fix MDL, Superloop-Spy MDL, Superloop-Vizir/Hedra MDL, XY180, Punk C (pendant), Orbit Punk (wall)


Finish Options

SUPERLOOP-XY180 MDL

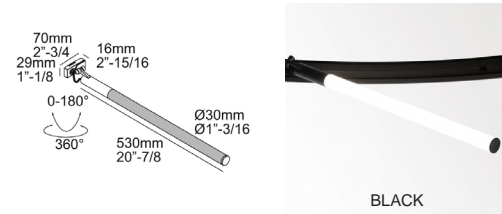

Photometric Data

SUPERLOOP-XY180 MDL



Installation Options

Delta Light's Superloop suspended track system utilizes 48V power supplies. With several power options available, the below details maximum luminaire modules per power supply by type.

Maximum Capacity Per Power Supply	Power Box L	Power Box H	Remote Power Supply
*Superloop-XY180 MDL:	5	8	8

FOR SYSTEM HARDWARE, REFER TO THE FOLLOWING:
Superloop MDL (suspended rings, rectangles, & squares)

As technology changes, please use information above as guidance. For most recent updated information please contact factory. Specifications subject to change without notice.