

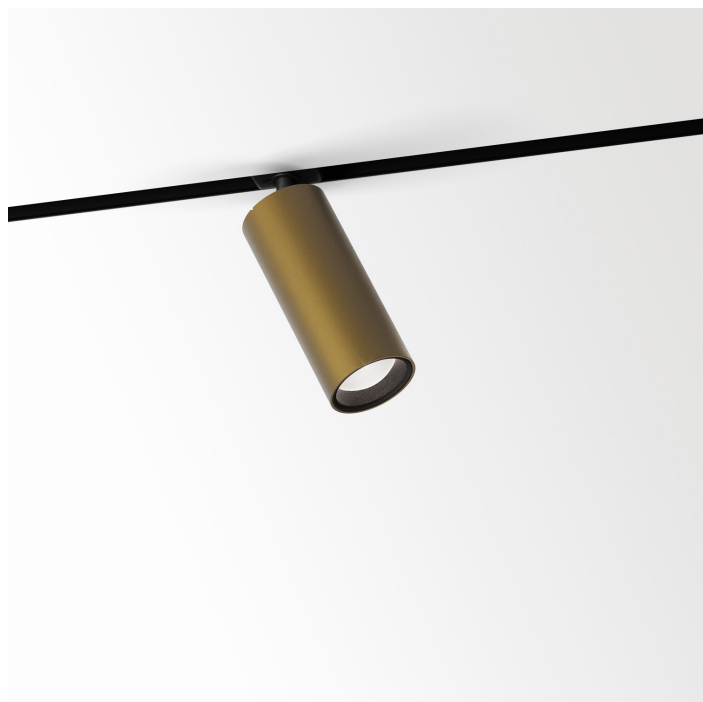




SPL14 - SPY 39 FOCUS 927 DIM5

27328 9205 FG

AVAILABLE IN
BLACK 27328 9205 B
FLEMISH BRONZE 27328 9205 FBR
FLEMISH GOLD 27328 9205 FG
GOLD COLOURED 27328 9205 GC
WHITE 27328 9205 W



[View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Low voltage systems Low voltage system mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.3
ADJUSTABILITY	0° to 85° swiveling, 355° rotatable
INFORMATION	ADJUSTABLE BEAM 15°-45°
Electrical info	
ELECTRICAL	48V-DC
CLASS	III
DIM TYPE	DALI
ENERGY CLASS	F
CERTIFICATES	CB, ENEC
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 8,6W / CRI>90 (R9: 60) / 2700K / 974lm
TM-30 VALUES	rf: 89 / Rg: 100
SDCM	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	15°-45°
LED TECHNICS (LIGHT SOURCE)	974lm // 8,6W // 113lm/W
LED TECHNICS (LUMINAIRE)	290lm // 9,9W // 29lm/W
Requirements	
LED POWER SUPPLY 48V-DC	

For detailed installation instructions, please consult the manual : [27328_XXX5_HAND.pdf](#)

SPL14 - SPY 39 FOCUS 927 DIM5

27328 9205 FG

FINISH YOUR SPECIFICATION

LED power supplies		# of Fixtures
# of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the ' ' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.		Min current Max current
5510090 300 89 48 100 LED POWER SUPPLY 48V-DC / 100W DIN Dimtype: non-dimmable	10	
63114125 300 89 48 240 LED POWER SUPPLY 48V-DC / 240W DIN Dimtype: non-dimmable	24	
1729830 21012 0230 LED POWER SUPPLY 48V-DC / 100W Dimtype: non-dimmable Cutout dimension (mm): 40	10	
2239230 21012 0240 LED POWER SUPPLY 48V-DC / 200W Dimtype: non-dimmable Cutout dimension (mm): 40	20	

COMPATIBLE COMPOSABLES

SPLITLINE 14 profile	Available Colours
403114 27300 0020 SPL14 - PROFILE 2m	
403114 27300 0030 SPL14 - PROFILE 3m	

Notes:

DELTALIGHT

SPL14 - SPY 39 FOCUS 927 DIM5

27328 9205 FG