




**SPY 66 WALLWASH 927 ADM
SLIM DIM5**

24632 9205 W

AVAILABLE IN
BLACK 24632 9205 B
WHITE 24632 9205 W

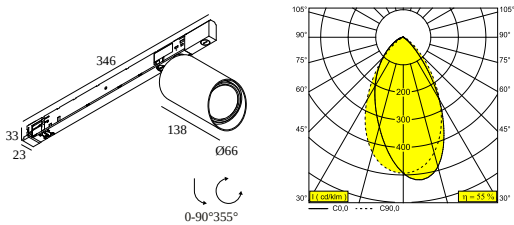

 [View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Mains voltage track Mains voltage track mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.6
ADJUSTABILITY	0° to 90° swiveling, 360° rotatable
INFORMATION	WALLWASH LENS 3F MULTI DIMMABLE POWER SLIM ADAPTER 350-500mA Current selection via jumper on adapter
Electrical info	
ELECTRICAL	220-240V / 50-60Hz
CLASS	II
POWER SUPPLY	YES
DIM TYPE	DALI
ENERGY CLASS	F
CERTIFICATES	CB, ENEC, RCM
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 17,2W / CRI>90 (R9: 60) / 2700K / 2009lm
TM-30 VALUES	rf: 89 / Rg: 100
SDCM	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
LED TECHNICS (LIGHT SOURCE)	2009lm // 17,2W // 117lm/W
LED TECHNICS (LUMINAIRE)	1099lm // 19,8W // 56lm/W
Requirements	
TRACK 3F DIM	

For detailed installation instructions, please consult the manual : [24632_XXX5_HAND.pdf](#)

DELTALIGHT

SPY 66 WALLWASH 927 ADM SLIM DIM5

24632 9205 W

COMPATIBLE TRACKS

TRACK 3F DIM H			Available Colours
200 14 410	TRACK 3F DIM H 1m	1000 m 1.6 kg	 
200 14 420	TRACK 3F DIM H 2m	2000 m 3.2 kg	 
200 14 430	TRACK 3F DIM H 3m	3000 m 4.8 kg	 
TRACK 3F DIM IN			Available Colours
200 13 410	TRACK 3F DIM IN 1m	1000 m 1.2 kg	 
200 13 420	TRACK 3F DIM IN 2m	2000 m 2.4 kg	 
200 13 430	TRACK 3F DIM IN 3m	3000 m 3.5 kg	 
TRACK 3F DIM ON			Available Colours
200 12 410	TRACK 3F DIM ON 1m	1000 m 1.1 kg	  
200 12 420	TRACK 3F DIM ON 2m	2000 m 2.1 kg	  
200 12 430	TRACK 3F DIM ON 3m	3000 m 3.1 kg	  

Notes: