

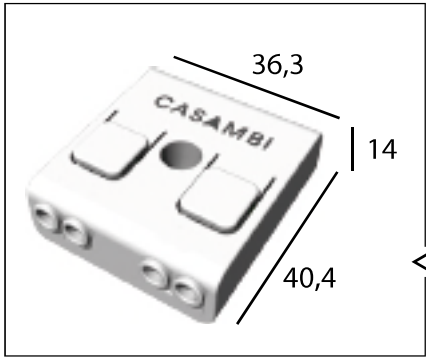
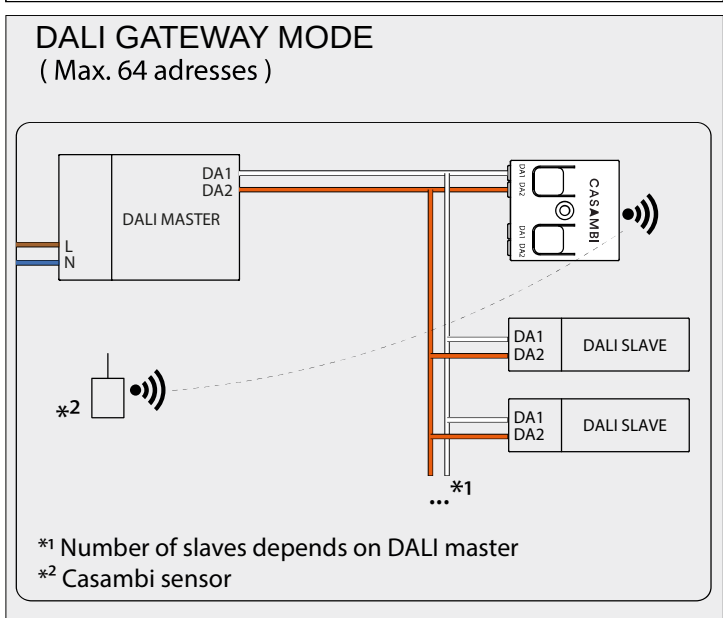
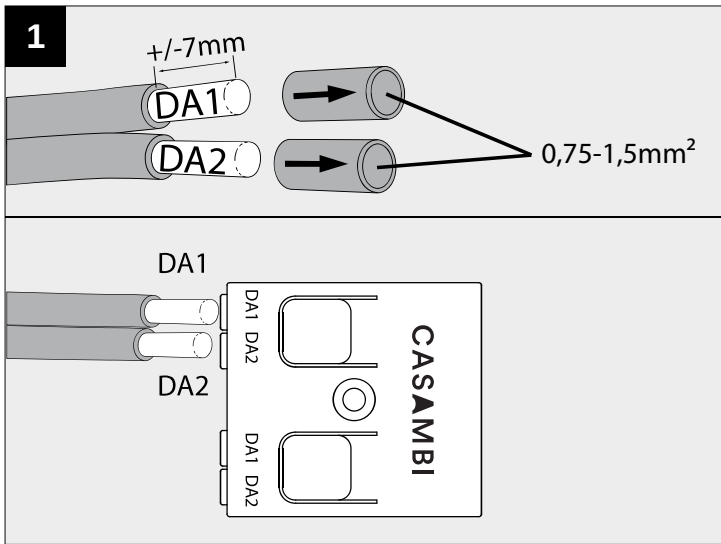
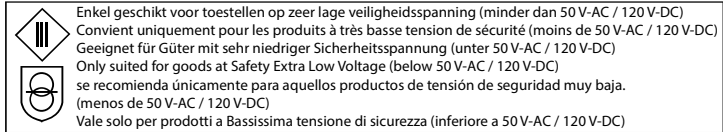
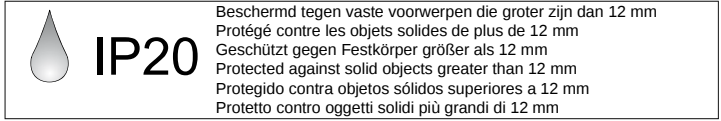
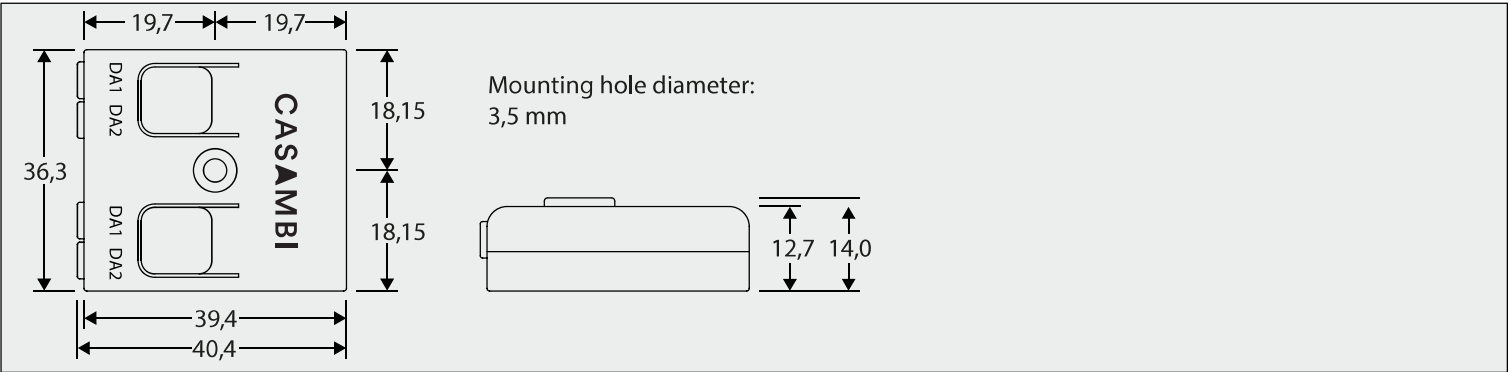


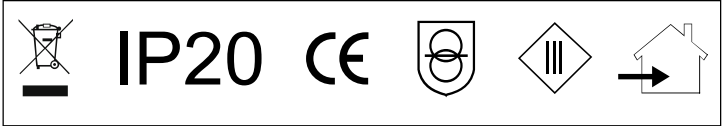



WIRELESS CONTROL DIM5 + DALI GATEWAY

DEEL
PARTIE
TEIL
PART
PARTE
PARTE

A

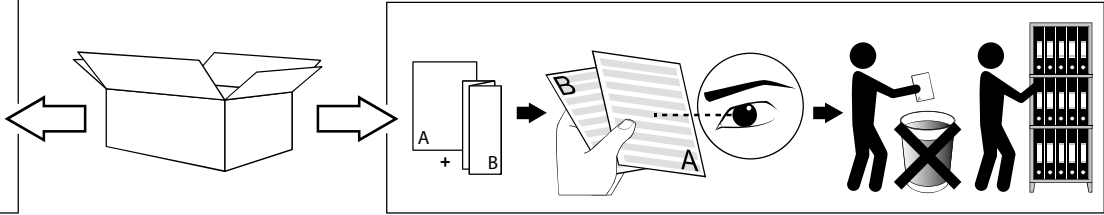

WIRELESS CONTROL MODE (Broadcast)

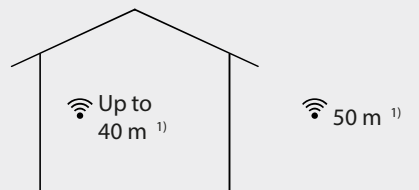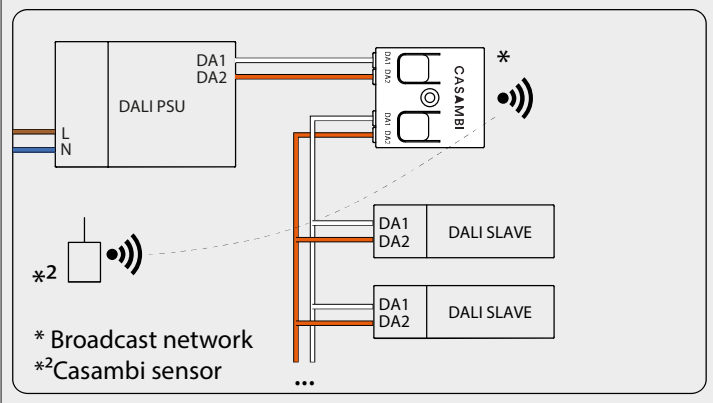

mesh network technology

Device acts also as a repeater. Longer ranges can be achieved by using multiple Casambi units.

¹⁾ Range is highly dependant on the surrounding and obstacles, such as walls and building materials.

MORE INFO FOR WIRELESS DIMMING

https://www.deltalight.com/downloads/CTRL_Delta_SUG.pdf



SCAN ME

MORE INFO FOR M - WIRELESS CONTROL DIM5

https://www.deltalight.com/downloads/manual/21032_0085_HAND.pdf



SCAN ME

TECHNICAL DATA

RADIO TRANSCEIVER

Operating frequencies: 2,4...2,483 Ghz
Maximum output power: +4 dBm

OPERATING CONDITIONS

Ambient temperature, TA: -20...+45°C
Max. case temperature, TC : +65°C
Storage temperature: -25...+75°C
Max. relative humidity: 0...80%, non cond

CONNECTORS

Wire range, solid & stranded: 0,5-1,5mm²
16-20AWG
Wire strip length: 6-8mm

MECHANICAL DATA

Dimensions: 40,4 x 36,3 x 14 mm
Weigth: 15g
Degree of protection: IP20 (Indoor)

NETWORK

Only available with Evolution firmware version 32.0

NETWORK

Device limit: 64 DALI instances

