


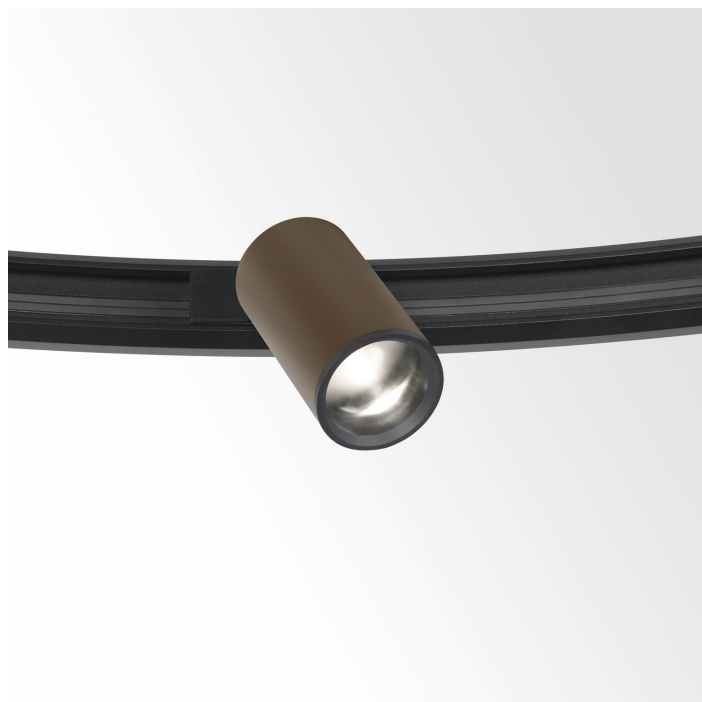

SUPERLOOP-SPY FOCUS LP 930 MDL



20547 9300 FBR

AVAILABLE IN

BLACK 20547 9300 B

FLEMISH BRONZE 20547 9300 FBR

FLEMISH GOLD 20547 9300 FG



[View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Low voltage systems Low voltage system mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.5
ADJUSTABILITY	0° to 90° swiveling, 355° rotatable
INFORMATION	ADJUSTABLE BEAM 8°-43° INCL.CLIP 48V ADAPTER EXCL.LED POWER SUPPLY 48V-DC
Electrical info	
ELECTRICAL	48V-DC
CLASS	III
DIM TYPE	MDL = 1-10V or DALI or push button
ENERGY CLASS	E
CERTIFICATES	CB, EAC, ENEC
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 8,6W / CRI>90 (R9: 52) / 3000K / 1018lm
TM-30 VALUES	rf: 90 / Rg: 99
SDCM	SDCM1
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	8°-43°
LED TECHNICS (LIGHT SOURCE)	1018lm // 8,6W // 118lm/W
LED TECHNICS (LUMINAIRE)	417lm // 9,9W // 42lm/W

Requirements

LED POWER SUPPLY 48V-DC

Options

DIMMABLE MODULATOR

For detailed installation instructions, please consult the manual : [20547_XXXX_HAND.pdf](#)

SUPERLOOP-SPY FOCUS LP 930 MDL

20547 9300 FBR

FINISH YOUR SPECIFICATION


SMART 48

of Fixtures



of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.


Min current | Max current



300 90 011 SMART 48 MODULATOR DIM9

18

Dimtype: 1-10V or DALI or push button



300 90 012 SMART 48 MODULATOR WD

18

Dimtype: WDL = wireless dimmable


LED power supplies

of Fixtures



of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current




300 89 48 90 LED POWER SUPPLY 48V-DC / 90W

9

Dimtype: non-dimmable


Cutout dimension (mm): 75



300 89 48 100 LED POWER SUPPLY 48V-DC / 100W DIN

9


Dimtype: non-dimmable



300 89 48 150 LED POWER SUPPLY 48V-DC / 150W

15

Dimtype: non-dimmable



300 89 48 240 LED POWER SUPPLY 48V-DC / 240W DIN


23


Dimtype: non-dimmable

DELTALIGHT







SUPERLOOP-SPY FOCUS LP 930 MDL

20547 9300 FBR

	21012 0230 LED POWER SUPPLY 48V-DC / 100W	9	☐
	Dimtype: non-dimmable		
	Cutout dimension (mm): 40		

	21012 0240 LED POWER SUPPLY 48V-DC / 200W	19	☐
	Dimtype: non-dimmable		
	Cutout dimension (mm): 40		


COMPATIBLE COMPOSABLES

SUPERLOOP HC MDL		Available Colours	
	418 481 07 SUPERLOOP HC 70 MDL		
	418 481 09 SUPERLOOP HC 90 MDL		
	418 481 12 SUPERLOOP HC 120 MDL		
	418 481 17 SUPERLOOP HC 170 MDL		
SUPERLOOP HC MDL XL		Available Colours	
	20555 0000 SUPERLOOP HC 200 MDL		
	20556 0000 SUPERLOOP HC 250 MDL		

DELTALIGHT


SUPERLOOP-SPY FOCUS LP 930 MDL

20547 9300 FBR




20557 0000 SUPERLOOP HC 300 MDL






20558 0000 SUPERLOOP HC 350 MDL





20559 0000 SUPERLOOP HC 400 MDL






20560 0000 SUPERLOOP HC 500 MDL




SUPERLOOP PLUS MDL

Available Colours




20564 0000 SUPERLOOP PLUS HC 70 MDL





20565 0000 SUPERLOOP PLUS HC 90 MDL






20566 0000 SUPERLOOP PLUS HC 120 MDL




SUPERLOOP S HC MDL

Available Colours



418 482 106 SUPERLOOP S HC 106 MDL







418 482 109 SUPERLOOP S HC 109 MDL



SUPERLOOP-SPY FOCUS LP 930 MDL

20547 9300 FBR

	418 482 211 SUPERLOOP S HC 211 MDL	
	418 482 217 SUPERLOOP S HC 217 MDL	

Notes: