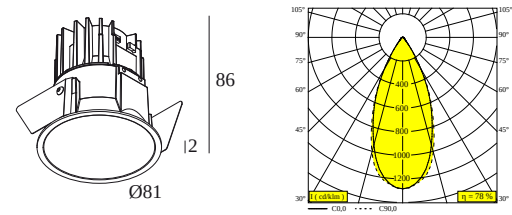




DEEP RINGO SOFT 93045

19437 9030 BROB

- AVAILABLE IN
- BLACK 19437 9030 B
 - BRUSHED ALU 19437 9030 BRA
 - BRUSHED ANTHRACITE 19437 9030 BRAT
 - BRUSHED BROWN BRONZE 19437 9030 BRBB
 - BRUSHED COPPER 19437 9030 BRCU
 - BRUSHED GOLD 19437 9030 BRG
 - BRUSHED OLD BRONZE 19437 9030 BROB
 - CREAM 19437 9030 CR
 - FLEMISH BRONZE 19437 9030 FBR
 - FLEMISH GOLD 19437 9030 FG
 - GOLD COLOURED 19437 9030 GC
 - PIANO BLACK 19437 9030 PB
 - WHITE 19437 9030 W



[View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Ceiling Recessed
CUTOUT SHAPE/SIZE (MM)	round - 76
RECESSED DEPTH (MM)	90
THICKNESS OF MOUNTING SURFACE (MM)	min.5
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.2
ADJUSTABILITY	non adjustable
INFORMATION	REFLECTOR WFL-45° EXCL.DIMMABLE LED POWER SUPPLY 500mA-DC

Electrical info	
CLASS	III
DIM TYPE	depending on power supply
ENERGY CLASS	F
CERTIFICATES	CB, ENEC, EPD, LCA

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	LED array 10,2W / CRI>90 (R9: 50) / 3000K-1800K / 1038lm
SDCM	SDCM2
RISKGROUP	RG1
LM80	L90B10 > 50000
BEAMANGLE	45°
LED TECHNICS (LIGHT SOURCE)	1038lm // 10,2W // 109lm/W
LED TECHNICS (LUMINAIRE)	814lm // 11,7W // 69lm/W

Requirements	
LED POWER SUPPLY 500mA-DC DIM	

For detailed installation instructions, please consult the manual : [19437_XXX0_HAND.pdf](#)

CEILING COMPATIBILITY

Ceiling Type	Mounting Kit
 System ceiling	-
 Plasterboard	-
 Stucanet	-
 Wood	-
 Concrete	-
 Concrete + plaster	-
 Lintel + plaster	-
 Hollow-core slab	-
 Hollow-core slab + plaster	-
 Stretched ceiling	-

FINISH YOUR SPECIFICATION

Emergency units

	21032 0270 B EMERGENCY UNIT 7W / 1h + LED INDICATOR HOLDER B	☐
Cutout dimension (mm): 27		
	21032 0270 W EMERGENCY UNIT 7W / 1h + LED INDICATOR HOLDER W	☐

DELTALIGHT

DEEP RINGO SOFT 93045

19437 9030 BROB

LED power supplies

of Fixtures



of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current



300 48 500 ED1 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM1

2

Dimtype: 1-10V

Cutout dimension (mm): 30



300 48 500 ED5 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5

2

Dimtype: DALI

Cutout dimension (mm): 45




300 48 500 MDL LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W MDL

2

Dimtype: non-dimmable

Cutout dimension (mm): 30




300 48 500 WDL LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W WDL

2

Dimtype: WDL = wireless dimmable

Cutout dimension (mm): 45




300 90 61 LED POWER SUPPLY MULTI-POWER DIM6

2

Dimtype: mains (phase cut-off) or push button

Cutout dimension (mm): 56




300 90 63 LED POWER SUPPLY MULTI-POWER DIM9

3(3)

Dimtype: 1-10V or DALI or push button

Cutout dimension (mm): 82




300 90 64 LED POWER SUPPLY MULTI-POWER DIM7

2(1)

Dimtype: 1-10V or push button

Cutout dimension (mm): 72



300 90 68 LED POWER SUPPLY MULTI-POWER DIM5

2(1)










Dimtype: DALI

Cutout dimension (mm): 72

DELTALIGHT


DEEP RINGO SOFT 93045

19437 9030 BROB

	<u>300 90 69</u> LED POWER SUPPLY MULTI-POWER HV DIM9	5(3)	☐
	Dimtype: 1-10V or DALI or push button		
	Cutout dimension (mm): 84		
	<u>300 90 124</u> LED POWER SUPPLY MULTI-POWER DIM7	1(1)	☐
	Dimtype: 1-10V or push button		
	Cutout dimension (mm): 55		
	<u>300 90 125</u> LED POWER SUPPLY MULTI-POWER MINI DIM5	1(1)	☐
	Dimtype: DALI		
	Cutout dimension (mm): 55		
	<u>21012 0010</u> LED POWER SUPPLY MULTI POWER	2	☐
	Dimtype: non-dimmable		
	Cutout dimension (mm): 50		
	<u>21012 0021</u> LED POWER SUPPLY MULTI POWER DIM1	2	☐
	Dimtype: 1-10V		
	Cutout dimension (mm): 54		
	<u>21012 0035</u> LED POWER SUPPLY MULTI POWER DIM5	2	☐
	Dimtype: DALI		
	Cutout dimension (mm): 54		
	<u>21012 004W</u> LED POWER SUPPLY MULTI-POWER WDL	3(3)	☐
	Dimtype: WDL = wireless dimmable		
	Cutout dimension (mm): 84		
	<u>21012 005W</u> LED POWER SUPPLY MULTI-POWER COMPACT WDL	2	☐
	Dimtype: WDL = wireless dimmable		
	Cutout dimension (mm): 54		
	<u>21012 0278</u> LED POWER SUPPLY MULTI POWER 500-700 / 20W DIM8	1	☐
	Dimtype: mains (phase cut-off)		
	Cutout dimension (mm): 55		
	<u>21012 0288</u> LED POWER SUPPLY MULTI POWER 500-700 / 36W DIM8	2->2	☐
	Dimtype: mains (phase cut-off)		
	Cutout dimension (mm): 55		

DEEP RINGO SOFT 93045

19437 9030 BROB




21012 0298 LED POWER SUPPLY MULTI POWER 250-900 / 20W DIM8

1 ☐

Dimtype: mains (phase cut-off)

Cutout dimension (mm): 48



21032 0305 LED POWER CONVERTER 48V-DC to 500 mA-DC / 22W DIM5

2 ☐

Dimtype: DALI

Cutout dimension (mm): 30

Notes: