
DELTALIGHT

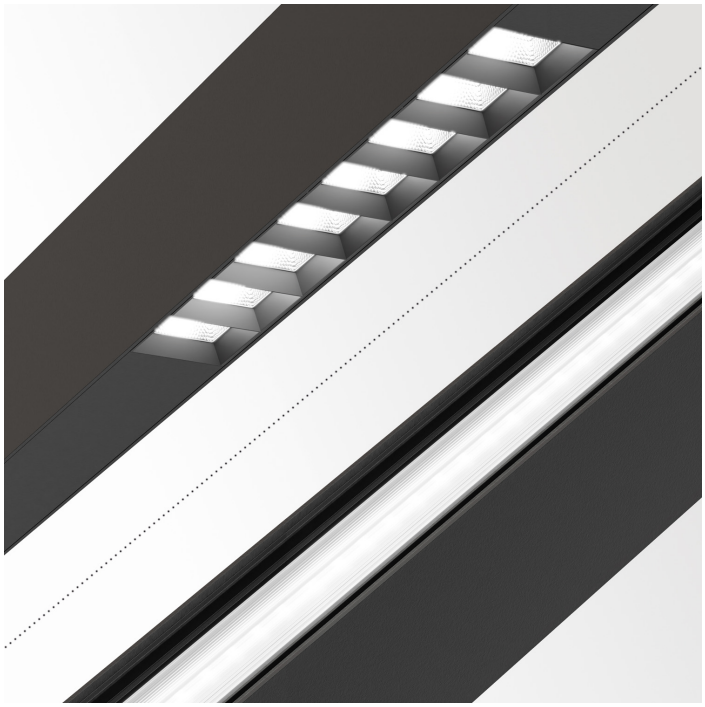

OML50 - INFORM DU HE 2624mm 8+16+8LED 94063

REFERENCE 31444 9430 B

AVAILABLE IN
BLACK 31444 9430 B

View on website

General info	
LOCATION	indoor
INGRESS PROTECTION	IP20
WEIGHT (KG)	2.4
INFORMATION	CLUSTER DOWN: 2014lm/m CLUSTER UP: 2014lm/m INCL.LED POWER SUPPLY CABLING 1 CIRCUIT

Electrical info	
ELECTRICAL	220-240V / 0|50-60Hz
CLASS	I
POWER SUPPLY	YES
DIM TYPE	non-dimmable
ENERGY CLASS	D
CERTIFICATES	EPD, RCM

Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	DOWN: LED cluster 32,6W / CRI>90 (R9: 50) / 4000K / 5286lm UP: LED cluster 32,6W / CRI>90 (R9: 50) / 4000K / 5286lm
TM-30 VALUES	Rf: 90 / Rg: 101
SDCM	SDCM3
RISKGROUP	RG1
LM80	L80 > 60000
BEAMANGLE	63°
LED TECHNICS (LIGHT SOURCE)	DOWN: 5286lm // 32,6W // 162lm/W UP: 5286lm // 32,6W // 162lm/W

Notes:

Delta Light NV may revise the information and technical data at any time without notice. Version: 08/10/2026