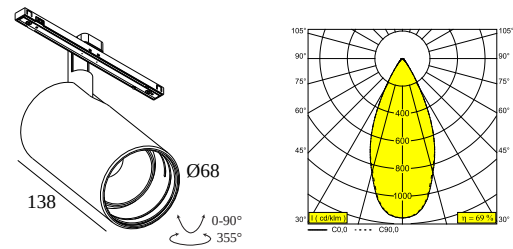




SOLI - 66 93045 DIM5

27123 9335 W

AVAILABLE IN  
**BLACK** 27123 9335 B  
**WHITE** 27123 9335 W



 [View on website](#)



| General info       |                                                                                              |
|--------------------|----------------------------------------------------------------------------------------------|
| LOCATION           | indoor                                                                                       |
| INSTALLATION       | Low voltage systems Low voltage system mounted                                               |
| INGRESS PROTECTION | IP20                                                                                         |
| WEIGHT (KG)        | 0.5                                                                                          |
| ADJUSTABILITY      | 0° to 90° swiveling, 360° rotatable                                                          |
| INFORMATION        | REFLECTOR WFL-45°<br>EXCL.LED POWER SUPPLY 48V-DC<br>Optional REFLECTORS 18° & 30° available |

| Electrical info |               |
|-----------------|---------------|
| ELECTRICAL      | 48V-DC        |
| CLASS           | III           |
| DIM TYPE        | DALI          |
| ENERGY CLASS    | E             |
| CERTIFICATES    | CB, ENEC, LCA |

| Lightsource info            |                                                  |
|-----------------------------|--------------------------------------------------|
| LIGHTSOURCE NAME            | LED                                              |
| LIGHTSOURCE                 | LED array 21W / CRI>90 (R9: 52) / 3000K / 2463lm |
| TM-30 VALUES                | rf: 90 / Rg: 99                                  |
| SDCM                        | SDCM1                                            |
| RISKGROUP                   | RG1                                              |
| LM80                        | L90B10 > 50000                                   |
| BEAMANGLE                   | 45°                                              |
| LED TECHNICS (LIGHT SOURCE) | 2463lm // 21W // 117lm/W                         |
| LED TECHNICS (LUMINAIRE)    | 1690lm // 24,2W // 70lm/W                        |

| Requirements            |  |
|-------------------------|--|
| SPY 66 TUBE             |  |
| LED POWER SUPPLY 48V-DC |  |

| Accessories           |  |
|-----------------------|--|
| HONEYCOMB 57          |  |
| SPREAD LENS 57        |  |
| LINEAR SPREAD LENS 57 |  |
| SOFTENING LENS 57     |  |
| GLASS SBL 57          |  |

# DELTALIGHT

## SOLI - 66 93045 DIM5

27123 9335 W

For detailed installation instructions, please consult the manual : [27123\\_XXX5\\_HAND.pdf](#)

### FINISH YOUR SPECIFICATION

#### LED power supplies

#### # of Fixtures

 # of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the '|' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.

Min current | Max current



**300 89 48 100** LED POWER SUPPLY 48V-DC / 100W DIN

4

Dimtype: non-dimmable



**300 89 48 240** LED POWER SUPPLY 48V-DC / 240W DIN

10

Dimtype: non-dimmable



**21012 0230** LED POWER SUPPLY 48V-DC / 100W

4

Dimtype: non-dimmable

Cutout dimension (mm): 40



**21012 0240** LED POWER SUPPLY 48V-DC / 200W

8

Dimtype: non-dimmable

Cutout dimension (mm): 40

#### Light altering devices



**24611 0150 B** HONEYCOMB 57 SINGLE USE B



**24611 0160** GLASS SBL 57

# DELTALIGHT

## SOLI - 66 93045 DIM5

27123 9335 W




**24611 0170** LINEAR SPREAD LENS 57

☐

**24611 0190** SOFTENING LENS 57

☐

**24611 0200** SPREAD LENS 57

☐

**24611 0210 B** HONEYCOMB 57 DOUBLE USE B

☐

### Finish your product



**24611 0100 B** SPY 66 TUBE B

☐

**24611 0100 FBR** SPY 66 TUBE FBR

☐

**24611 0100 FG** SPY 66 TUBE FG

☐

**24611 0100 GC** SPY 66 TUBE GC

☐

**24611 0100 W** SPY 66 TUBE W

☐

### Replaceable reflector / lens



**24611 0220** SPY 66 REFLECTOR 18°

☐

# DELTALIGHT

## SOLI - 66 93045 DIM5

27123 9335 W




**24611 0230** SPY 66 REFLECTOR 30°



**24611 0240** SPY 66 REFLECTOR 45°



### COMPATIBLE COMPOSABLES

| SOLISCAPE profile                                                                                                                                                                                                                | Available Colours                                                                                                                                                                     |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <div><br/></div> <p><b>27111 0020</b> SOLI - PROFILE 2m</p>     | <div></div>     |
| <div><br/></div> <p><b>27111 0030</b> SOLI - PROFILE 3m</p> | <div></div> |

Notes: