




SOLI - FORM 60 DOWN-UP 2
CIRCUIT 93067 Q-DIM

27145 932Q B-B

AVAILABLE IN
BLACK-BLACK 27145 932Q B-B
BLACK-FLEMISH GOLD 27145 932Q B-FG
WHITE-BLACK 27145 932Q W-B
WHITE-WHITE 27145 932Q W-W

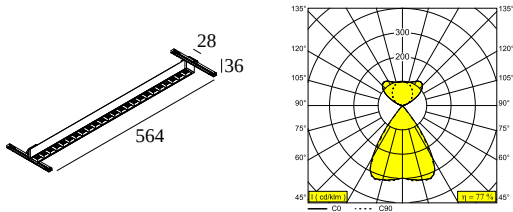

 [View on website](#)



General info	
LOCATION	indoor
INSTALLATION	Low voltage systems Low voltage system mounted
INGRESS PROTECTION	IP20
WEIGHT (KG)	0.5
ADJUSTABILITY	non adjustable
INFORMATION	INCL.24 x REFLECTOR FL-67° EXCL.LED POWER SUPPLY 48V-DC 2 CIRCUITS
Electrical info	
ELECTRICAL	48V-DC
CLASS	III
DIM TYPE	Qbus dim
ENERGY CLASS	D
CERTIFICATES	CB, ENEC, LCA
Lightsource info	
LIGHTSOURCE NAME	LED
LIGHTSOURCE	DOWN: LED cluster 7W / CRI>90 (R9: 50) / 3000K / 1068lm UP: LED cluster 7W / CRI>90 (R9: 50) / 3000K / 1068lm
TM-30 VALUES	Rf: 92 / Rg: 100
SDCM	SDCM3
RISKGROUP	RG1
LM80	L80 > 60000
BEAMANGLE	67°
LED TECHNICS (LIGHT SOURCE)	DOWN: 1068lm // 7W // 152lm/W UP: 1068lm // 7W // 152lm/W
LED TECHNICS (LUMINAIRE)	DOWN: 908lm // 8W // 113lm/W UP: 716lm // 8W // 89lm/W
Requirements	
LED POWER SUPPLY 48V-DC	

For detailed installation instructions, please consult the manual : [27145_XXXQ_HAND.pdf](#)

SOLI - FORM 60 DOWN-UP 2 CIRCUIT 93067 Q-DIM

27145 932Q B-B

FINISH YOUR SPECIFICATION

LED power supplies		# of Fixtures
# of fixtures indicates how many devices can be connected (min -> max) to the power supply. The values before and after the ' ' correspond respectively with the minimum and maximum driving current. Values between brackets are applicable to 110V.		Min current Max current
5510090 300 89 48 100 LED POWER SUPPLY 48V-DC / 100W DIN Dimtype: non-dimmable	6	
63114125 300 89 48 240 LED POWER SUPPLY 48V-DC / 240W DIN Dimtype: non-dimmable	15	
1729830 21012 0230 LED POWER SUPPLY 48V-DC / 100W Dimtype: non-dimmable Cutout dimension (mm): 40	6	
2239230 21012 0240 LED POWER SUPPLY 48V-DC / 200W Dimtype: non-dimmable Cutout dimension (mm): 40	12	

COMPATIBLE COMPOSABLES

SOLISCAPE profile	Available Colours
2319 27111 0020 SOLI - PROFILE 2m	
2319 27111 0030 SOLI - PROFILE 3m	

Notes:

DELTALIGHT

SOLI - FORM 60 DOWN-UP 2 CIRCUIT 93067 Q-DIM

27145 932Q B-B