



CONFORM P28 PDS DOWN-UP 953067

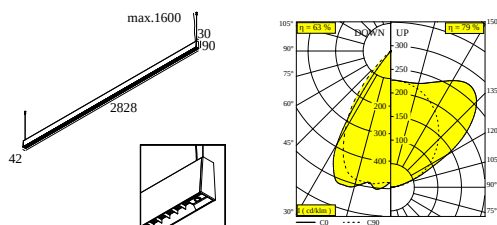
26516 7320 W-B

AVAILABLE IN

BLACK-BLACK 26516 7320 B-B

BLACK-FLEMISH GOLD 26516 7320 B-FG

WHITE-BLACK 26516 7320 W-B



[View on website](#)



General info

LOCATION	indoor
INSTALLATION	Ceiling Suspended
INGRESS PROTECTION	IP20
WEIGHT (KG)	8
ADJUSTABILITY	non adjustable
INFORMATION	120 x REFLECTOR FL-67° (DOWN) INCL.DIMMABLE LED POWER SUPPLY 1300mA-DC DOWN / 1000mA-DC UP INCL.PRESENCE & DAYLIGHT SENSOR INCL.2 x CABLE SUSPENSION SINGLE AUTO. 1,6m INCL.1 x CABLE 3 x 0.75mm ² NATURAL LIGHT TECHNOLOGY

Electrical info

ELECTRICAL	220-240V / 0 50-60Hz
CLASS	I
POWER SUPPLY	YES
DIM TYPE	non-dimmable
ENERGY CLASS	D
CERTIFICATES	CB, ENEC, RCM

Lightsource info

LIGHTSOURCE NAME	LED
LIGHTSOURCE	DOWN: LED cluster 43,9W / CRI>95 (R9: 80) / 3000K / 5136lm UP: LED cluster 33,7W / CRI>95 (R9: 80) / 3000K / 3955lm
TM-30 VALUES	Rf: 94 / Rg: 103
SDCM	SDCM3
RISKGROUPE	RG2
LM80	L80 > 60000
BEAMANGLE	67°
LED TECHNICS (LIGHT SOURCE)	DOWN: 5136lm // 43,9W // 117lm/W UP: 3955lm // 33,7W // 117lm/W
LED TECHNICS (LUMINAIRE)	DOWN: 3225lm // 50,5W // 64lm/W UP: 3117lm // 38,8W // 80lm/W

Options

CABLE BASE R / S

COVERSET R 62-90-100 / S 62-80-90


CONNECTION ST / CONNECTION TRIMLESS

SUSPENSION ST / SUSPENSION TRIMLESS



For detailed installation instructions, please consult the manual : [26516_XXX0_HAND.pdf](#)

FINISH YOUR SPECIFICATION

Current supply

	<u>203 99 55 ANO</u> CABLE BASE R ANO	☐
	<u>203 99 55 B</u> CABLE BASE R B	☐
	<u>203 99 55 W</u> CABLE BASE R W	☐
	<u>203 99 56 ANO</u> CABLE BASE S ANO	☐
	<u>203 99 56 B</u> CABLE BASE S B	☐
	<u>203 99 56 W</u> CABLE BASE S W	☐





Coversets

	<u>204 00 62 ANO</u> COVERSET R 62 ANO	☐
	<u>204 00 62 B</u> COVERSET R 62 B	☐
	<u>204 00 62 W</u> COVERSET R 62 W	☐
	<u>204 00 90 ANO</u> COVERSET R 90 ANO	☐

DELTALIGHT

CONFORM P28 PDS DOWN-UP 953067

26516 7320 W-B


	<u>204 00 90 B</u>	COVERSET R 90 B	☐
	<u>204 00 90 W</u>	COVERSET R 90 W	☐
	<u>204 00 100 ANO</u>	COVERSET R 100 ANO	☐
	<u>204 00 100 B</u>	COVERSET R 100 B	☐
	<u>204 00 100 W</u>	COVERSET R 100 W	☐
	<u>204 62 62 ANO</u>	COVERSET S 62 ANO	☐
	<u>204 62 62 B</u>	COVERSET S 62 B	☐
	<u>204 62 62 W</u>	COVERSET S 62 W	☐
	<u>204 80 80 ANO</u>	COVERSET S 80 ANO	☐
	<u>204 80 80 B</u>	COVERSET S 80 B	☐
	<u>204 80 80 W</u>	COVERSET S 80 W	☐
	<u>204 90 90 ANO</u>	COVERSET S 90 ANO	☐
	<u>204 90 90 B</u>	COVERSET S 90 B	☐
	<u>204 90 90 W</u>	COVERSET S 90 W	☐

DELTALIGHT

CONFORM P28 PDS DOWN-UP 953067

26516 7320 W-B


Suspension parts



328 10 01 SUSPENSION TRIMLESS O.F.A.

☐

Cutout dimension (mm): 62 (CONCRETE: 102)



15225 0340 B SUSPENSION ST B


☐

Cutout dimension (mm): 27

15225 0340 W SUSPENSION ST W

☐

Electric connection parts



328 10 03 CONNECTION TRIMLESS O.F.A.

☐

Cutout dimension (mm): 62 (CONCRETE: 102)



15225 0360 B CONNECTION ST B


☐

Cutout dimension (mm): 43


15225 0360 W CONNECTION ST W

☐

Other



26510 0010 PDS REMOTE CONTROL

☐

26510 0020 PDS SENSOR PROGRAMMER

☐

DELTALIGHT

CONFORM P28 PDS DOWN-UP 953067

26516 7320 W-B

Notes: